



Electrical specifications

Frequency Range: 1360~1380 MHz
Center Frequency: 1370 MHz
Insertion Loss: ≤ 1.0 dB
Return Loss: ≥ 15 dB
Rejection 1: >50 dB@1320MHz
Rejection 2: >50 dB@1450MHz


Mechanical

Mounting Method: Threaded Mounting
Connector Type: N-type(F)
Dimensions: 3.35" x 2.10" x 1.73" in
Surface Finish: Black

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

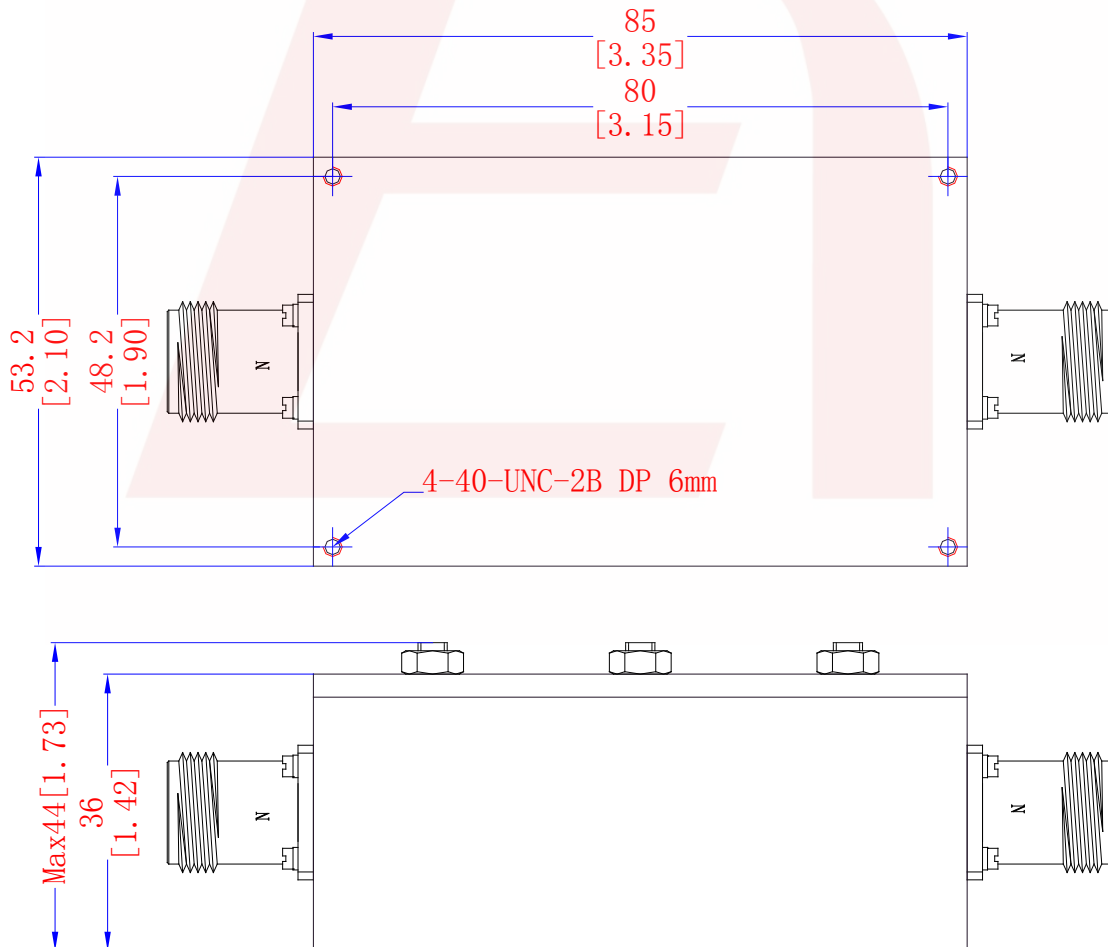



1370 MHz Cavity Bandpass Filter

Part Number: AB1370B1263



Plot:

