


High voltage contacts for cable applications

| Identification                                   | Wire gauge (mm <sup>2</sup> )        | Part number                                       |   |
|--|--------------------------------------|---|---|
|  |                                      | Male contacts<br>Plating: 1.3 µm Au <sup>1)</sup> | Female contacts<br>Plating: 1.3 µm Au <sup>1)</sup> |
| Straight versions<br>with solder termination     | AWG<br>24 - 20<br>0.25 - 0.56        | 09 69 281 2550                                    | 09 69 181 2550                                      |
|  | with crimp termination <sup>2)</sup> | AWG<br>30 - 24<br>0.05 - 0.25                     | 09 69 282 2550                                      |
| Right angled versions<br>with solder termination | AWG<br>24 - 20<br>0.25 - 0.56        | 09 69 681 2550                                    | 09 69 581 2550                                      |

D-Sub

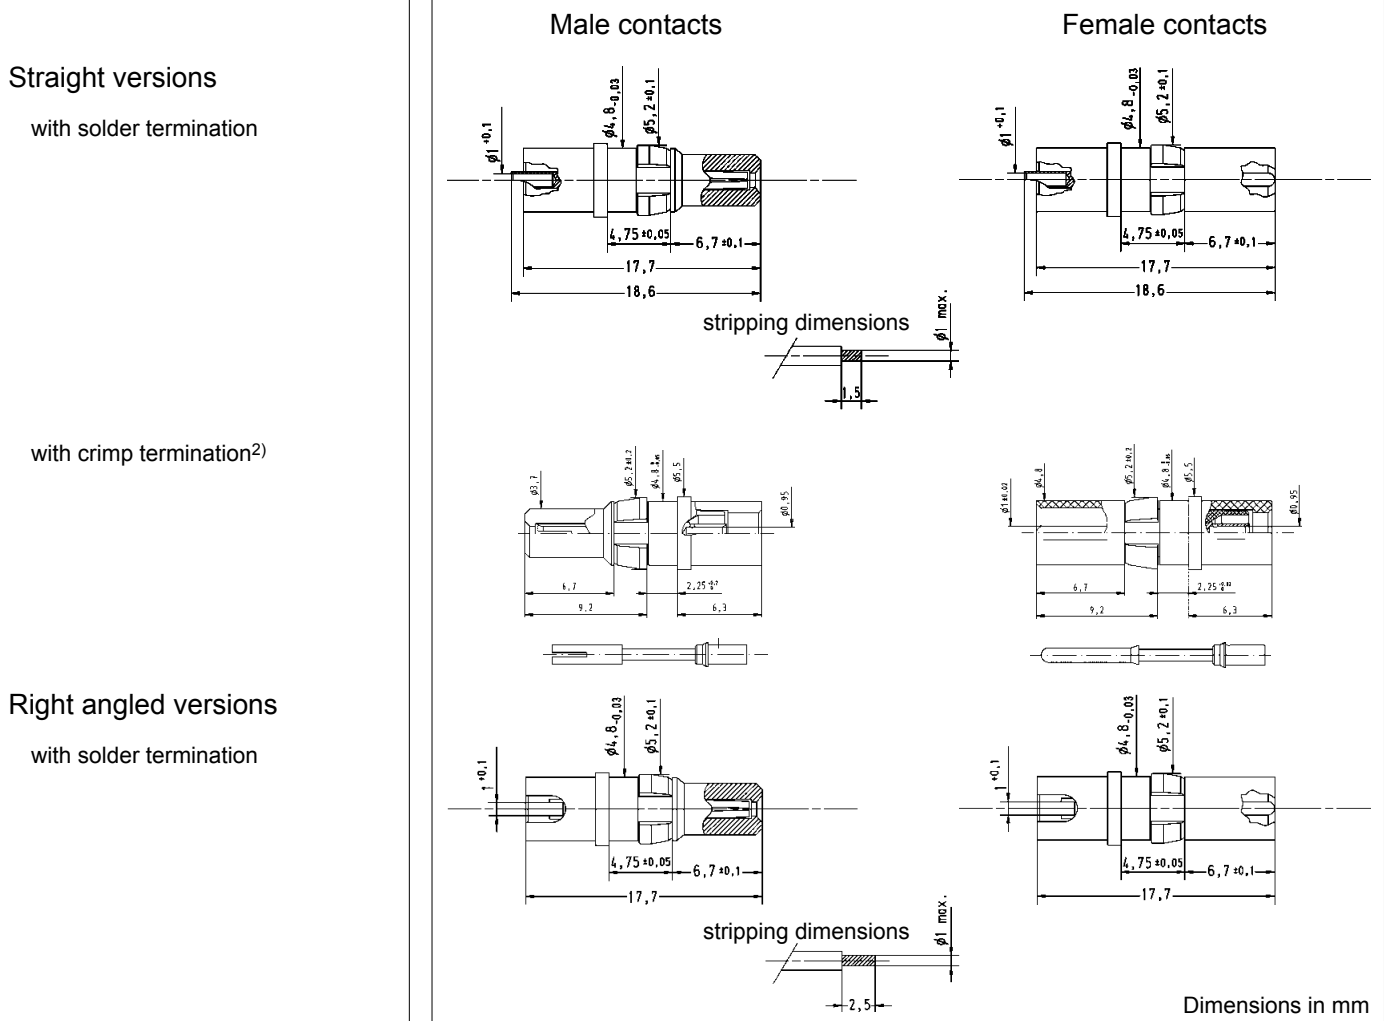

Dimensions in mm

<sup>1)</sup> for mating and terminating side  
<sup>2)</sup> Tooling see chapter 20