

<b>T</b>	G	П	m	D	0



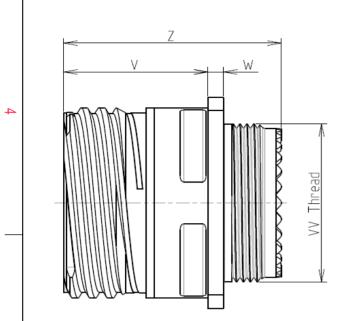

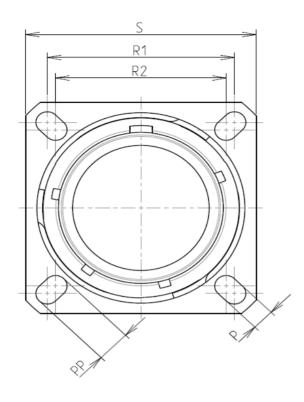

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

_					
	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 43.5 g ± 10%			

8D 0

G

13

S

08

В

F

Е

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g


ORIENTATION : E

CONTACT LAYOUT : 13-08

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

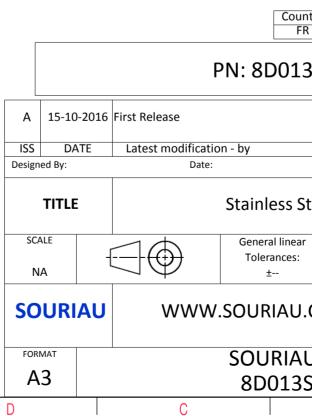

	Φ		А		
					4
AS EXA	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co he Parties or t on, technical n Jurisc	mply with by a third part			2
	1			MOD N°	
Stee	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859				
		This doc	cument is the prop	perty of	1
	.COM SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
50	8BE-C			1/2	J
	В		А		

		۵	<del>ات</del>	m		0
		Contact Layout				Panel Cutout
4		$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posi II A E CC C C C C C C C C C C C C C C C N S S C N S S S S	Uion D  X-axis (mm)  Y-axis (mm)    A  +.065 (1.65)  +.157 (3.99)    B  +.170 (4.32)  +.000 (0.00)    C  +.120 (3.05) 120 (3.05)    D  .000 (0.00) 170 (4.32)    E 120 (3.05) 120 (3.05)    F 170 (4.32)  +.000 (0.00)    S 065 (1.65)  +.157 (3.99)			¥	
ယ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
22						Country FR PN: 8D013S
					A 15-10-20 ISS DATE Designed By:	16 First Release
_					TITLE SCALE NA	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D013SC
	Н	G	F	E	D	C

