
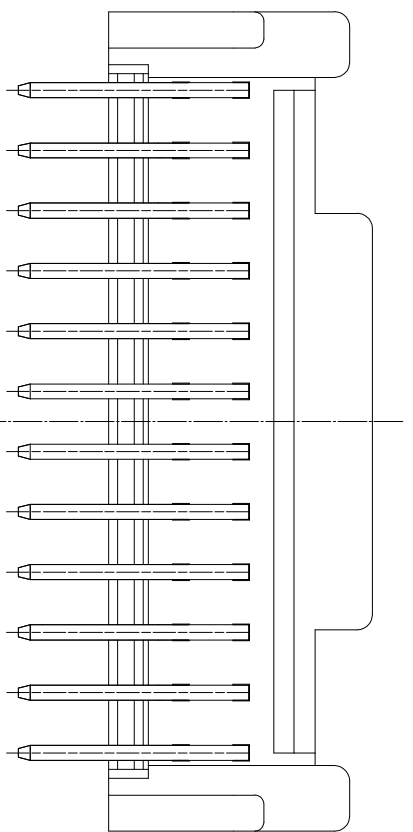
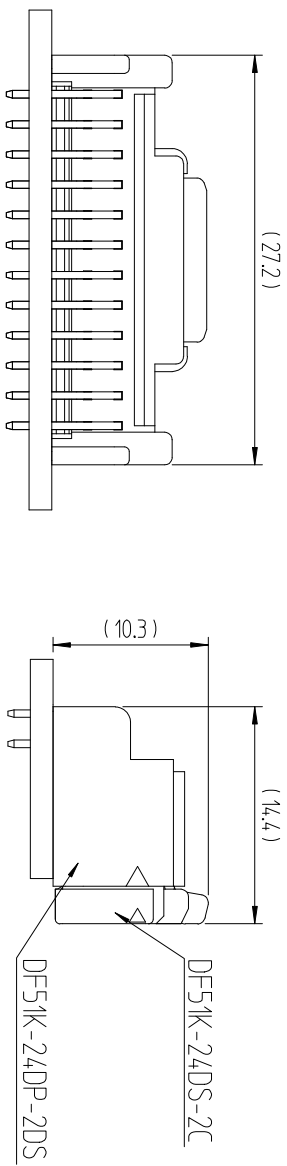
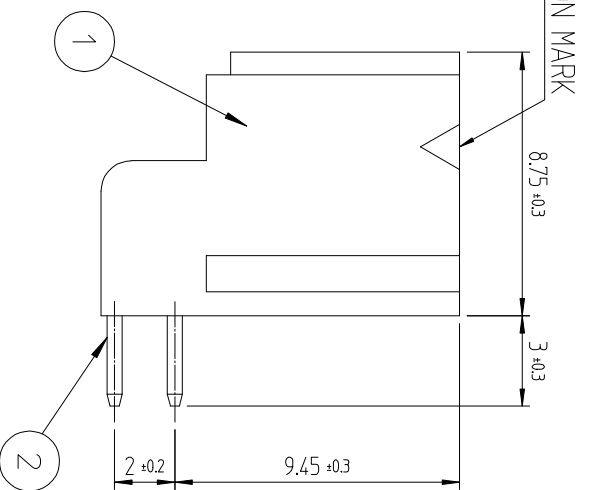
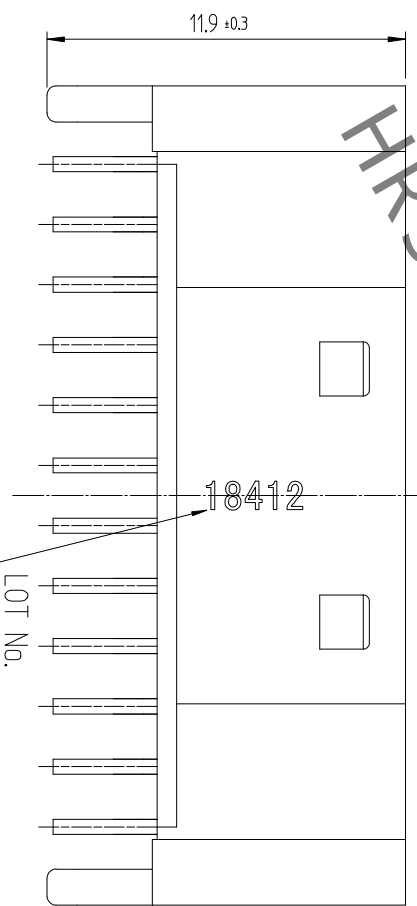
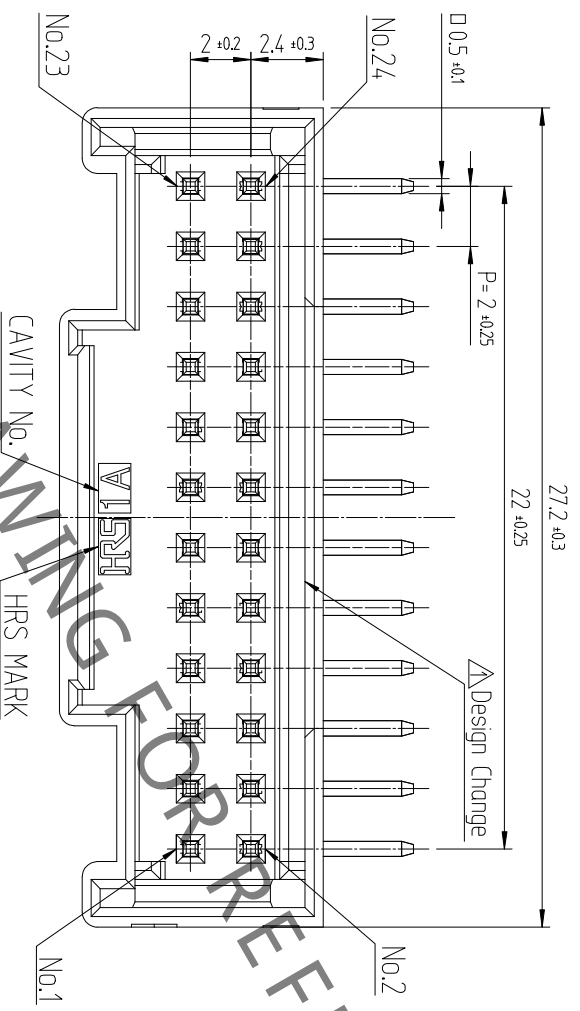


△数	訂正事項	檢圖	年月日	△数	訂正事項	檢圖	年月日
COUNT	DESCRIPTION OF REVISIONS	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	CHKD	DATE
1	RE-6-1150	K.I.Y	18. 07. 04				
2	RE-6-1579	K.I.Y	20. 01. 23				

RECOMMENDED LAND PATTERN (FREE)
 (PCB THICKNESS t=1.6mm)

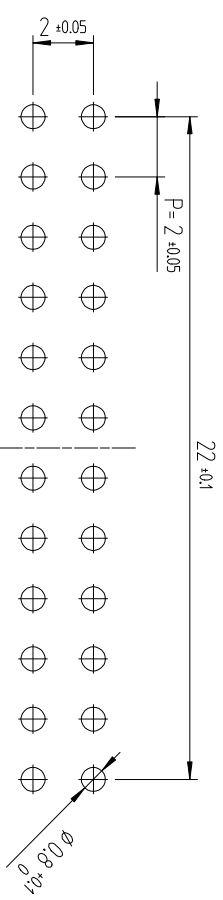

NOTE 1. 1PACK CONTAINS 110PCS.

1. DIMENSIONS ARE ONLY REFERENCE.
2. UL(UL File No. E132750) AUTHORIZATION ARTICLE.
3. UL(UL File No. E132750) AUTHORIZATION ARTICLE.

C-UL(UL File No. E132750) AUTHORIZATION ARTICLE.



1	PBT	UL94V-0, BLACK	2	BRASS	GOLD PLATING 0.1μm MIN, OVER NICKEL 0.5μm MIN
NO.	MATERIAL	FINISHREMARKS	NO.	MATERIAL	FINISHREMARKS
CODE NO. (OLD)					
DRAWN			DESIGNED		
CHOI (18.03.02) J.S			CHOI (18.03.02) J.S		
CHECKED			APPROVED		
LIM (18.03.02) S.M			KANG (18.03.02) T.S		
RELEASED			RELEASED		
ENG (20.02.12) DEPT			ENG (20.02.12) DEPT		
DRAWING NO.		PART NO.		CODE NO.	
EDC3-632486		DF51K-24DP-2DS (805)		CL 6652-0048-5-805	
SCALE		UNITS		MM	
4:1					

F E D C B A 1 2 3 4 5 6 7 8