



REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/20/2006

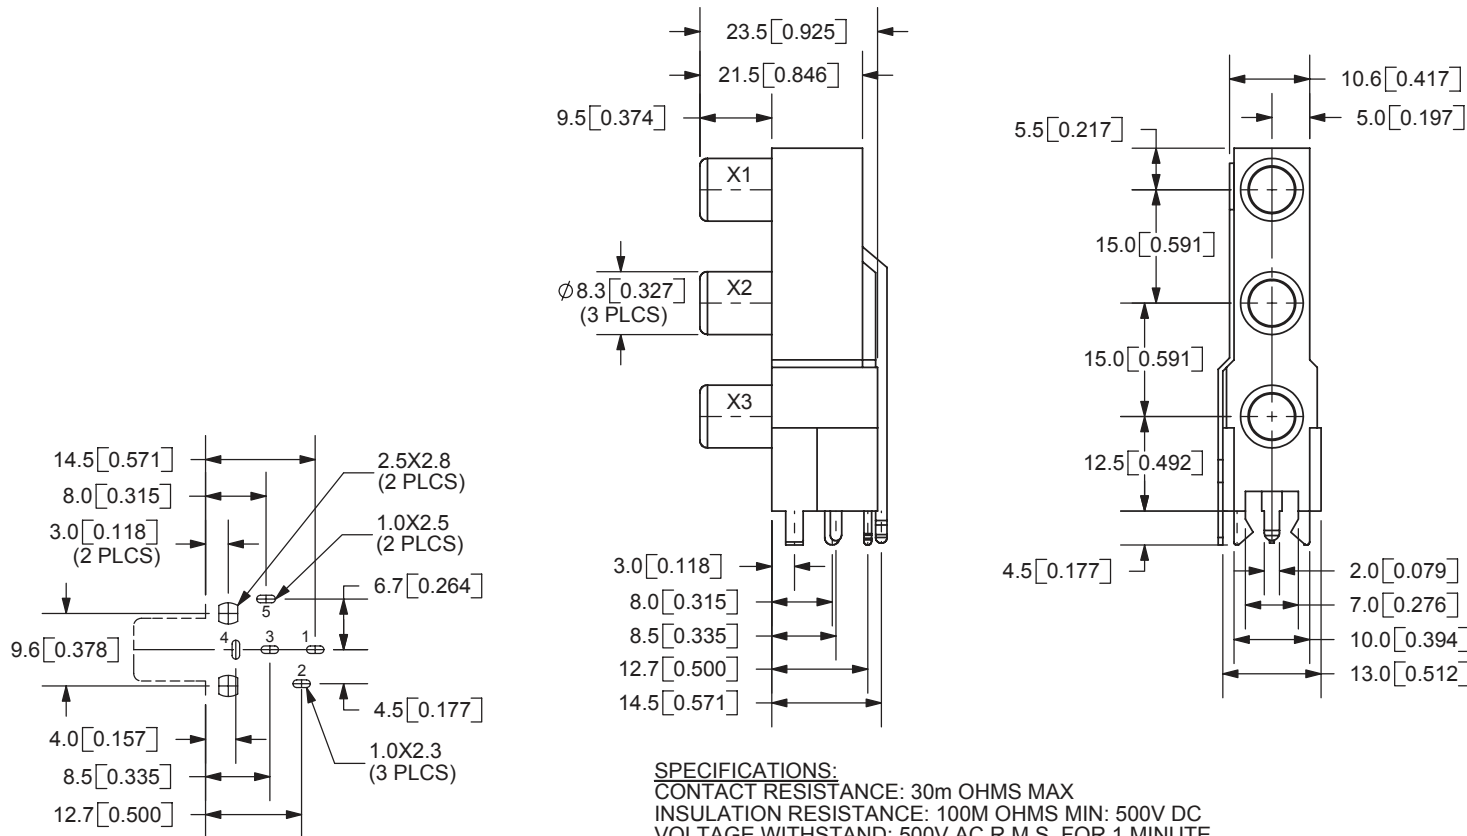

SPECIFICATIONS:
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES
 OPERATING TEMP: -20° ~ +85°C

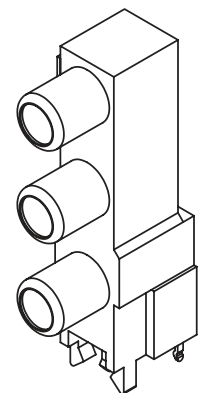


COLOR INDEX

PART NO.	INPUT X1	INPUT X2	INPUT X3
RCJ-33234	Red Color	White Color	Yellow Color
RCJ-33X1 X2 X3	Color X1	Color X2	Color X3

TOLERANCE:
 ±0.3mm UNLESS OTHERWISE SPECIFIED



9615 SW Allen Blvd., Ste. 103
 Beaverton, OR 97005
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

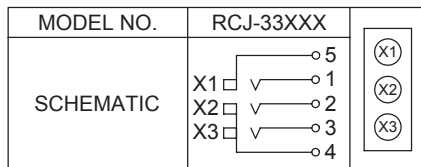

COLOR CHART	
1	Black
2	Red
3	White
4	Yellow
5	Blue
6	Green
7	Orange

	MATERIAL	PLATING
BARRELS	Brass	Nickel
TERMINAL 1	Brass	Silver
TERMINAL 2	Brass	Silver
TERMINAL 3	Brass	Silver
HOUSING 1	ABS	Black Color
HOUSING 2	ABS	Black Color
INPUT X1	PBT	see color index
INPUT X2	PBT	see color index
INPUT X3	PBT	see color index

TITLE:	RCA Jack, Dual, Rt Angle, PCB Mount, Vert.	REV:	A
PART NO.	RCJ-33XXX	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	1:1

PC FILE NAME:
 RCJ-33XXX

COPYRIGHT 2006 BY CUI INC.