


DIMENSIONS IN MILL. —DO NOT SCALE PRINT

U.S.A.

C-160644-E

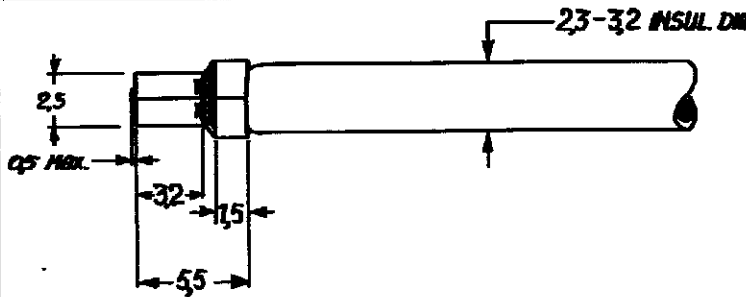

LTR	REVISION RECORD	DWN	CHK	DATE
H2	ECR-17-013051	ST	TD	SEP17

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



△ SPLICE FREE

△ REVERSE REELED

"H" DEPENDENT ON CROSS AREA OF WIRE
NOTE: △ FOR USE ON STANDARD APPLICATORS (RIGHT-LEFT FEED)
△ FOR USE ON MINIATURE APPLICATORS (LEFT-RIGHT FEED) (AMP-O-MATOR APPLICATION)

△ OBSOLETE	△	TIN/LEAD OVER NICKEL	BRASS	+160644-1
	△△	TIN	BRASS	1-160644-0
△ OBSOLETE	△	NICKEL	BRASS	-160644-9
	△	NONE	BRASS	-160644-8
	△△	TIN	BRASS	+160644-7
	△△	NICKEL	STEEL	+160644-6
△ OBSOLETE	△△	SILVER	BRASS	+160644-4
	△	TIN	BRASS	-160644-3
	△	SILVER	BRASS	-160644-2
	△	NONE	BRASS	160644-1
		NOTE	PLATING	MATERIAL
				ORDER NO

CUSTOMER PRINT
FOR REFERENCE ONLY

©1965 BY AMP-HOLLAND N.V. ALL RIGHTS RESERVED. A-AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

△	△	△	△	△	△	△	△	△	△	
5	5	5	5	5	5	5	5	5	5	
5	8	7	6	5	4	3	2	1		
REQUIRED PER ASSEMBLY									DESCRIPTION	
			BRASS			HEAT TREAT			FINISH	
									SEE TABLE	
AMP			DR. REVISOR			DATE APP'D			DATE REL	
			3-2-65			6-17-65			8/16	
AMP-HOLLAND N.V.			TYPE			PRINT DIST			LOC SIZE NUMBER	
HERIOTGENBOSCH HOLLAND			A.M.			H			A C-160644-E	
SCALE			WIRE SIZE			CMA			NAME	
4:1			45-7.5			MAX ~			WIRE PIN	
			MIN. ~							
									REV H2	