THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
J	

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REDRAWN W/CHANGE FJ00-2455-02	05DEC02	T.K	Y.Y

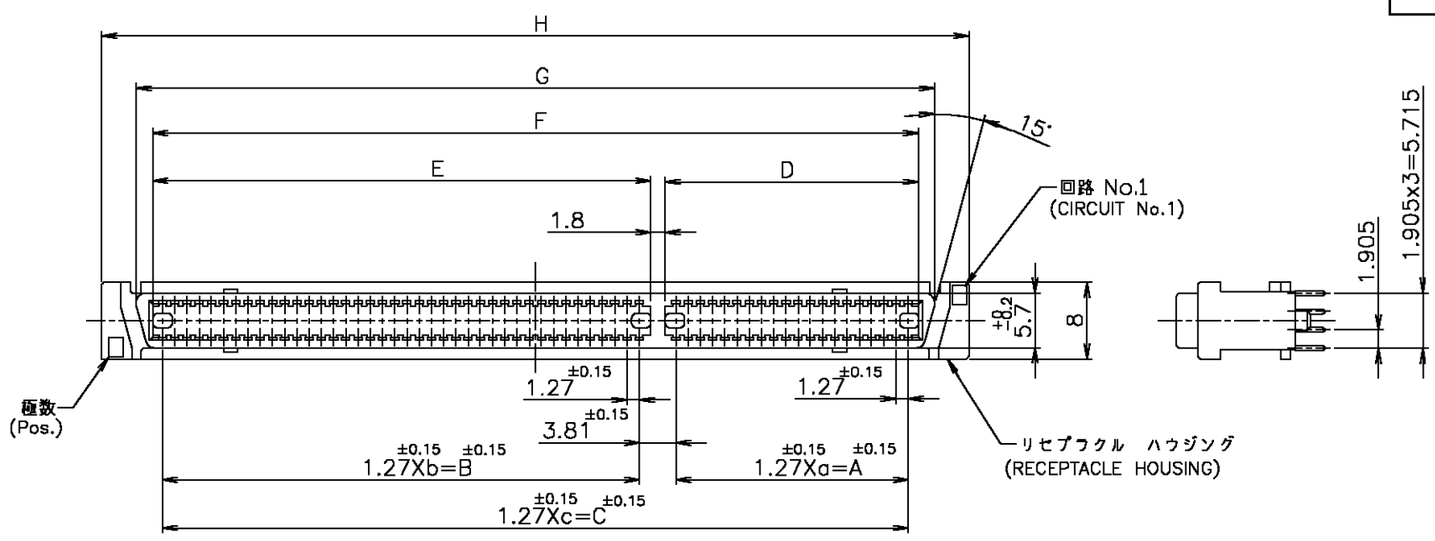

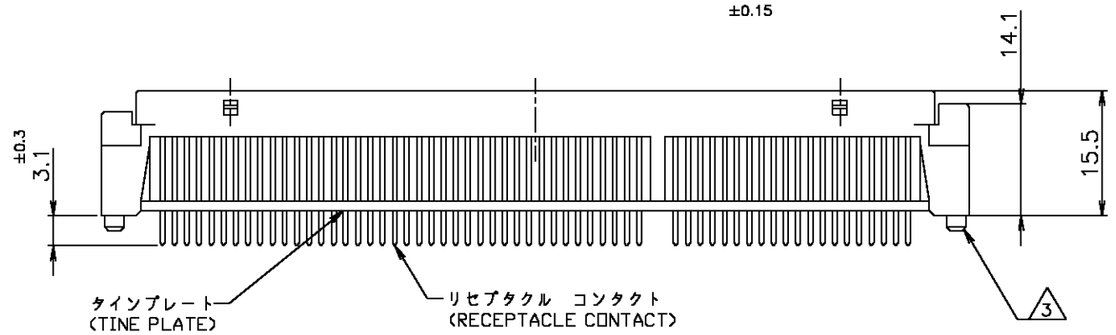

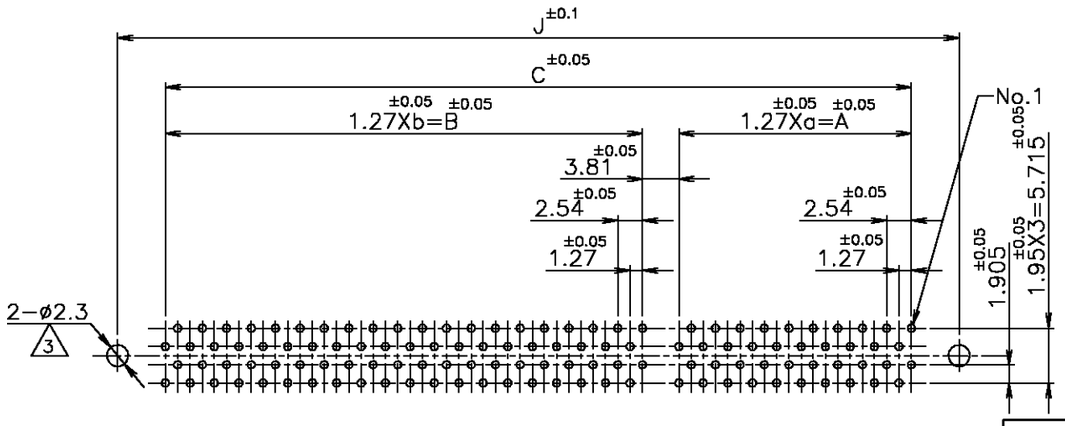

基板仕様
(コネクタ装着側)

P.C.BOARD LAYOUT
(CONNECTOR MOUNT SIDE)

NOTE:

1. MATERIAL:HOUSING:THERMOPLASTIC
   (UL 94V-0) BLACK.
   CONTACT:COPPER ALLOY
2. FINISH:CONTACT:0.3μm or 0.76μm MIN. Au CONTACT
   AREA,1μm MIN. TIN LEAD AT TINE, OVER Ni
3. BOSS FOR POSITIONING:P/N -1,-2,-3,-4

注記:

1. 材料:ハウジング;熱可塑性樹脂
   (UL 94V-0) 色、黒。
   ※コンタクト:銅合金
2. 表面仕上げ;
   ※コンタクト:全面 1.3μm以上のニッケル下地メッキに接触部
   0.3μm 又は、0.76μm 以上の金メッキ、脚部 1μm 以上の半田メッキ
3. ボスは型番 -1,-2,-3,-4 のみ

0.76μm	120	19	24.13	39	49.53	//	77.47	26.13	51.53	79.47	82.56	90.09	87.44	2-	-5
	100	//	//	//	//	49	62.23	//	//	64.23	67.32	74.85	72.2	2-	-4
0.3μm	180	39	49.53	49	62.23	//	115.57	51.53	64.23	117.57	120.66	128.19	125.54		-8
	160	29	36.83	49	62.23	//	102.87	38.83	64.23	104.87	107.96	115.49	112.84		-7
	140	29	36.83	39	49.53	//	90.17	38.83	51.53	92.17	95.26	102.79	100.14		-6
	120	19	24.13	39	49.53	//	77.47	26.13	51.53	79.47	82.56	90.09	87.44		-5
	100	//	//	//	//	49	62.23	//	//	64.23	67.32	74.85	72.2		-4
	80	//	//	//	//	39	49.53	//	//	51.53	54.62	62.15	59.5		-3
	60	//	//	//	//	29	36.83	//	//	38.83	41.92	49.45	46.8		-2
	40	//	//	//	//	19	24.13	//	//	26.13	29.22	36.75	34.1	176378-1	
GOLD PLATING	Pos.	a	A	b	B	c	C	D	E	F	G	H	J	P/N	

THIS DRAWING IS A CONTROLLED DOCUMENT.

TOLERANCES UNLESS OTHERWISE SPECIFIED
一般公差
10° : ±0.2
30° ≦10 : ±0.25
100° ≦10 : ±0.3
ANGLES ±3°

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 1

FINISH 2

DWN	T.KAWAMAE	05DEC02
CHK	H.SHIRAI	05DEC02
APVD	Y.YAMAMOTO	05DEC02
PRODUCT SPEC	108-5309	
APPLICATION SPEC		
WEIGHT		

CUSTOMER DRAWING

tyco Electronics
Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME
1.27 FH CONN. (VERTICAL) REC, 18mm STACK

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-176378	-

SCALE	SHEET	REV
NTS	1 OF 1	D