




ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00396	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, molding style	1	
2	30-00177	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00085	Overmold	1	PVC, black
4	Heat shrink	Heat shrink tube	1	black, covers end of jacket
5	Heat shrink	Heat shrink tube	1	black, covers shield

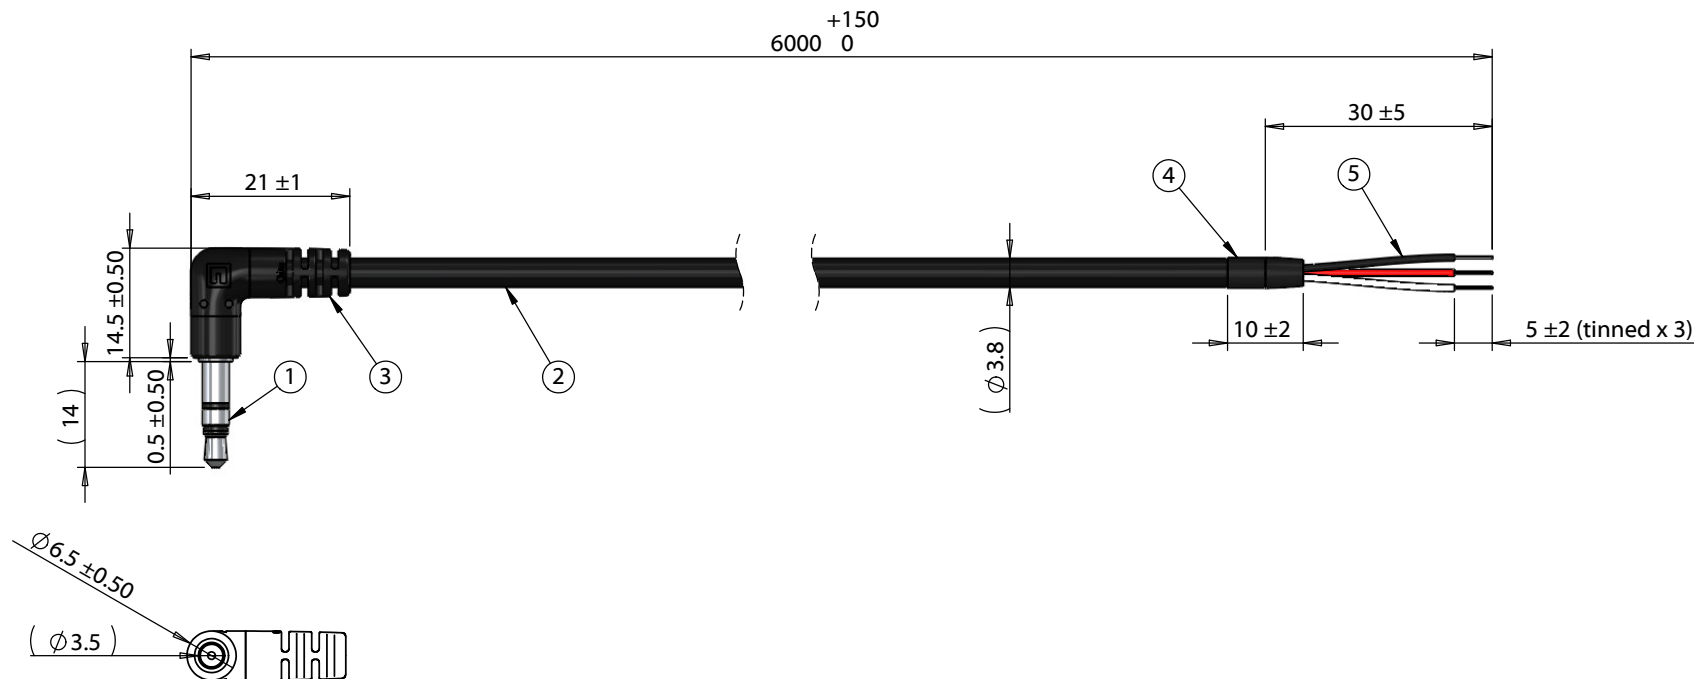

Wiring Diagram	
50-00396	wire color
A	red
B	white
C	shield

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1>
A	2/21/2019	Initial release	AG		
			Verified:	RoHS compliant	tel 1.541.323.3228 800 877.670.7118
			AW	Function test: no open, no short circuit, no intermittent	fax 1.541.323.4202 web tensility.com
			Dimensions are in millimeters.	Description:	Size: Part number:
			Tolerances:	Cable, 6000 mm, 3.5 mm 3C 90° 50-00396 audio plug to 5 mm tinned, 28 AWG, 30-00177 wire	A 10-03201
			X: ± 0.5 mm		Scale: 1:1
			X.X: ± 0.3 mm		Sheet 1 of 1
			X.XX: ± 0.05 mm		

5

4

3

2

1