


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE, TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.		DESCRIPTION	DATE	APPROVED
A		NEW RELEASE	21/FEB/2012	

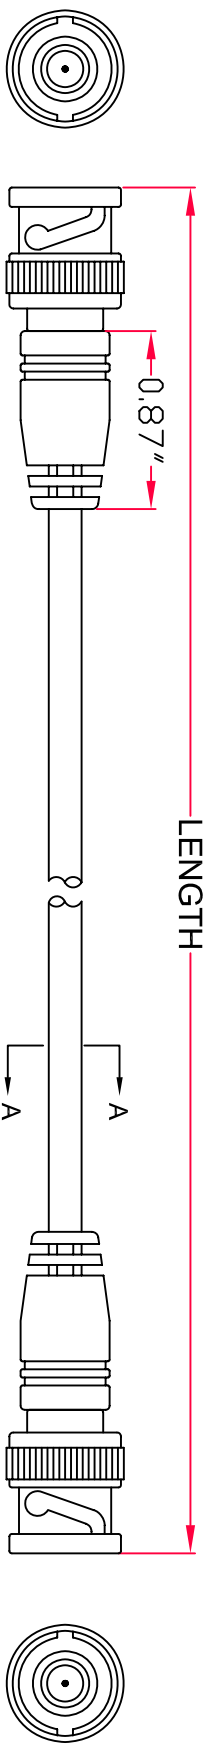


BNC M

BNC M


CABLE MARKING:
 **AWM E119932 STYLE 1354 80°C 30V**
 Amphenol Cables on Demand

- NOTES:
1. CABLE: [28AWG(7/0.127±0.01mm)]TC*1C+ BRAID[(16*5/0.10±0.008mm)] TINNED COPPER INSULATION:PE OD= 1.6±0.10mm COLOR:TRANSPARENT JACKET:HALF MATTE PVC OD=Ø2.80±0.15mm COLOR:BLACK
 2. CONNECTOR:BNC Male 75 OHM PIN GOLD FLASH, NICKEL PLATED SHLLE
 3. MOLDING SR:45Pa PVC BLACK
 4. OPEN/SHORT MISS WIRE TEST 100%
 5. CONDUCTOR RESISTANCE ≅ 237.25Ω/km
 6. INSULATION RESISTANCE ≅ 2MΩ DC300V 0.01Sec



LENGTH & P/N Table

LENGTH	P/N
1FT(305±20mm)	AV-THLIN2BNCM-001
2.5FT(762±25mm)	AV-THLIN2BNCM-002.5
5FT(1524±30mm)	AV-THLIN2BNCM-005
7.5FT(2286±40mm)	AV-THLIN2BNCM-007.5
10FT(3048±50mm)	AV-THLIN2BNCM-010
15FT(4572±50mm)	AV-THLIN2BNCM-015
25FT(7620±100mm)	AV-THLIN2BNCM-025

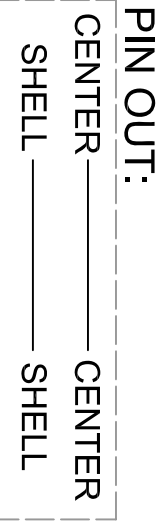

PIN OUT:



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.		APPROVALS		DATE		Amphenol Cables on Demand	
DECIMALS				DRAWN	LF	21/FEB/2012		20 VALLEY ST. ENDCOTT, NY 13760	
X	±X			CHECKED	BA	21/FEB/2012		UL1354 BNC M/BNC M	
XX	±.XX			RESP ENG				SIZE DWG. NO. AV-THLIN2BNCM-XXX	
XXX	±.XXX			MFG ENG				REV. A0	
THIRD ANGLE PROJECTION		SCALE		SHEET		OF			

NOTES: UNLESS OTHERWISE SPECIFIED