




Axial Leaded Aluminum Electrolytic Capacitors

Type TYAV 85°C Series

Key Features

- General purpose polarized aluminum foil electrolytic capacitors
- Axial leads
- Aluminum case with insulating sleeve
- 85°C temperature rating
- 2000 hours load life assured
- RoHS Compliant

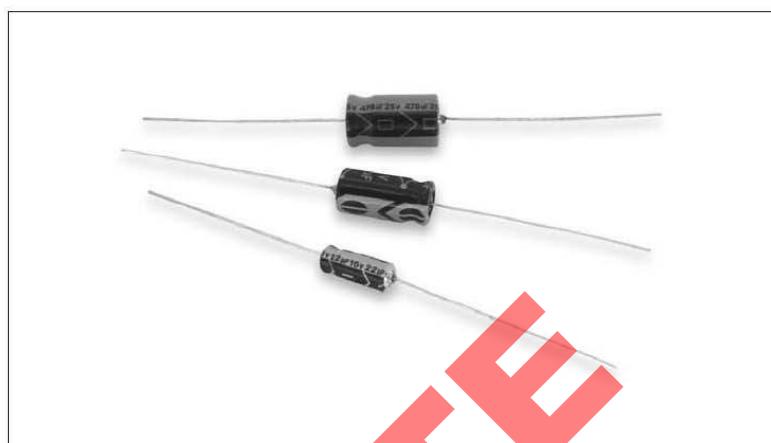

TE Connectivity's axial leaded aluminum electrolytic capacitors are designed for through-hole PCB population where mounting height is restricted. The TYAV series offers a wide capacitance range at voltages from 6.3 to 450Vd.c. Suitable for a broad range of general purpose filtering, by-passing, power supply coupling/decoupling, telecommunications and audio-video applications.

Characteristics - Electrical

															Test Cond. JIS C5101-4, Characteristic W
Operating Temp. Range	-40°C ~ +85°C														—
Rated Voltage	DC 6.3 ~ 450V														85°C
Capacitance	0.1 ~ 22000µF														85°C
Capacitance Tolerance	±20%														120Hz, 20°C
Leakage Current	Rated Voltage	≤100V				>100V									C = rated capacitance (µF) V = rated DC working voltage (V) Temperature = 20°C
	Time	after 2 minutes				after 5 minutes									
	Leakage Current	I = 0.02CV or 3 (µA) whichever is greater				CV ≤1000				CV >1000					120Hz, 20°C
		I = 0.03CV + 15 (µA)				I = 0.02CV + 25 (µA)									120Hz
Dissipation Factor (Tand)	Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450
	Tanδ max	0.23	0.20	0.17	0.15	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.24	0.24
Low Temperature Characteristics	Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450
	Impedance Ratio	Z(-25°C)/ øD≥16	6	4	3	3	2	2	2	3	6	8	12	14	16
		Z(+20°C)/ øD≥16	8	6	4	4	3	3	3	3	6	8	12	14	16
		Z(-40°C)/ øD≥16	10	8	6	6	4	3	3	3	4	8	10	—	—
		Z(+20°C)/ øD≥16	18	16	12	10	8	8	6	6	—	—	—	—	—
Load Life Test	Test Time	2000 Hrs													
	Capacitance Change	Within ±20% of initial value													
	Dissipation Factor	Less than 200% of specified value													
	Leakage Current	Within specified value													
Shelf Life Test	Test Time	1000 hrs													
	Capacitance Change	Within ±20% of initial value													
	Dissipation Factor	Less than 200% of specified value													
	Leakage Current	Within specified value													
Ripple Current & Multipliers Frequency	Frequency (Hz)	60(50)	120	500	1k	≥10k									Specifications satisfied when the capacitors are restored to 20°C after exposing them for 1000 hrs at 85°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5102)
	C (µF) < 100	0.70	1.00	1.30	1.40	1.50									—
	C (µF) 100 ~ 1000	0.75	1.00	1.20	1.30	1.35									—
	C (µF) > 1000	0.80	1.00	1.10	1.12	1.15									—