Free Height

TE Internal #: 120527-1


PCB Mount Header, Vertical, Board-to-Board, 64 Position, 1 mm [. 039 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal,

Black, Free Height

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > Free Height Plug Connector: Board-Board, Vertical, 64, 1mm

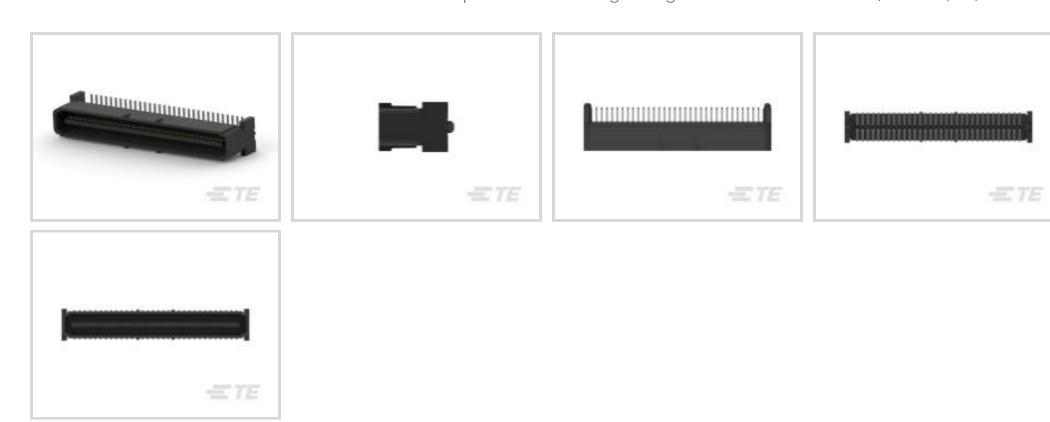

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical
Connector System: Board-to-Board

Number of Positions: 64

Centerline (Pitch): 1 mm [.039 in]

All Free Height Plug Connector: Board-Board, Vertical, 64, 1mm (40)

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Columns	32
Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	64

Parallel

Electrical Characteristics

Board-to-Board Configuration



Insulation Resistance	2 ΜΩ
Operating Voltage	250 VAC
Signal Characteristics	
Differential Signaling	Yes
Body Features	
Primary Product Color	Black
Contact Features	
Contact Mating Area Length	2 mm
PCB Contact Termination Area Plating Material Thickness	3.81 μm[150 μin]
Contact Layout	Inline
Mating Tab Width	.63 mm[.024 in]
Mating Tab Thickness	.2 mm[.008 in]
Contact Underplating Material Thickness	1.27 μm[50 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Single Beam
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 μm[29.9212 μin]
Contact Type	Pin
Contact Current Rating (Max)	1 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.3 mm[.011 in]
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
PCB Mount Alignment Type	Locating Posts
Mating Retention	Without
PCB Mount Retention Type	None
Mating Alignment	Without
Mating Alignment Type	None



PCB Mount Alignment	With
	VVICII
Housing Features	
Mating Entry Location	Тор
Centerline (Pitch)	1 mm[.039 in]
Housing Material	Matte
Dimensions	
Connector Length	34.22 mm[1.347 in]
Connector Height	8.35 mm[.328 in]
Connector Width	3.81 mm[150 in]
Stack Height	9 mm, 11 mm, 14 mm[.551 in]
Usage Conditions	
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Operation/Application	
Operation/Application Assembly Process Feature	None
	None Signal
Assembly Process Feature	
Assembly Process Feature Circuit Application	
Assembly Process Feature Circuit Application Industry Standards	Signal
Assembly Process Feature Circuit Application Industry Standards UL Rating	Signal
Assembly Process Feature Circuit Application Industry Standards UL Rating Agency/Standard	Signal Listed CSA, UL
Assembly Process Feature Circuit Application Industry Standards UL Rating Agency/Standard Approved Standards	Signal Listed CSA, UL CSA LR7189, UL E28476
Assembly Process Feature Circuit Application Industry Standards UL Rating Agency/Standard Approved Standards Industry Standards	Signal Listed CSA, UL CSA LR7189, UL E28476 IEEE 1386
Assembly Process Feature Circuit Application Industry Standards UL Rating Agency/Standard Approved Standards Industry Standard UL Flammability Rating	Signal Listed CSA, UL CSA LR7189, UL E28476 IEEE 1386

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)



Candidate List Declared Against: JAN 2023

(233)

Free

SVHC > Threshold:

Pb (13% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content


Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Solder Process Capability Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts









Also in the Series | Free Height



Customers Also Bought













TE Part #1-5767007-2 MICT,260PLUG,190,ASSY,.025,REC



TE Part #2-767004-4 MICT,RECPT,114,ASSY,.025,REC







TE Part #374472-E STVTE 160 MI ABCDE VVVVV 4-00 GA06 4,0 *

Documents

Product Drawings

1FHP,64,30A/P,S,N,S10,12,13,15

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_120527-1_F1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_120527-1_F1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_120527-1_F1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

PCB Mount Header, Vertical, Board-to-Board, 64 Position, 1 mm [.039 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Black, Free Height



Application Specification

English