
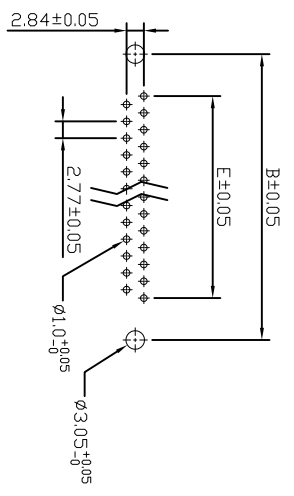



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation. If you are not an authorized recipient, your attention is directed to discuss or to use any information in this document.

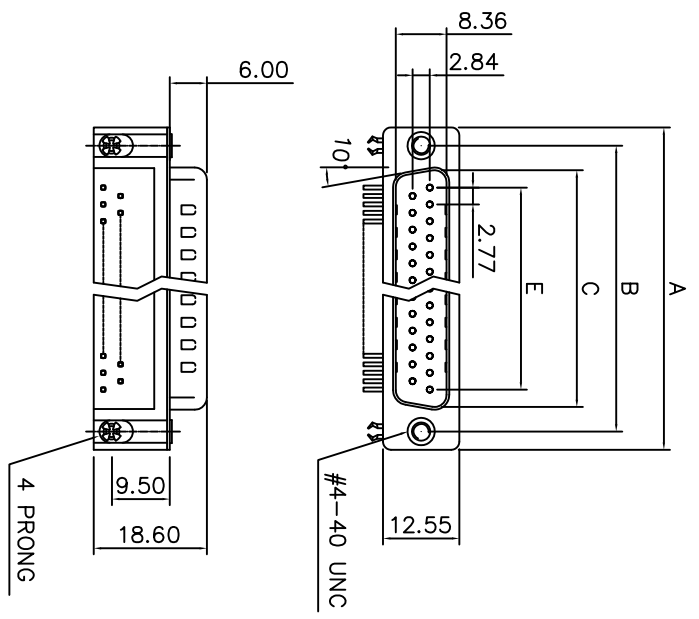

RECOMMENDED PCB LAYOUT

Dimensions

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86




REVISIONS

S/N	ECN	DESCRIPTION	DATE	APPROVED
			14/Apr/11	

D-SUB TECHNICAL DATA

SHELL : Steel, 100u" min Tin Over 50u" Nickel over 50u" min Copper
 BODY : Glass-Filled Thermoplastic PBT, UL94V-0
 CONTACTS : Copper Alloy,
 30u" gold plated over 50u" Nickel on mating area
 100u" min Tin over 50u" Nickel on solder area
 BOARDLOCK: Brass, Tin plated
 CLINCH NUT: Copper Alloy, Nickel plated
 ELECTRICAL : Contact Resistance :
 20 Milliohms Maximum.
 Insulation Resistance : 1000 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3AMP
 Voltage Rating: 250 VAC/rms 60HZ
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

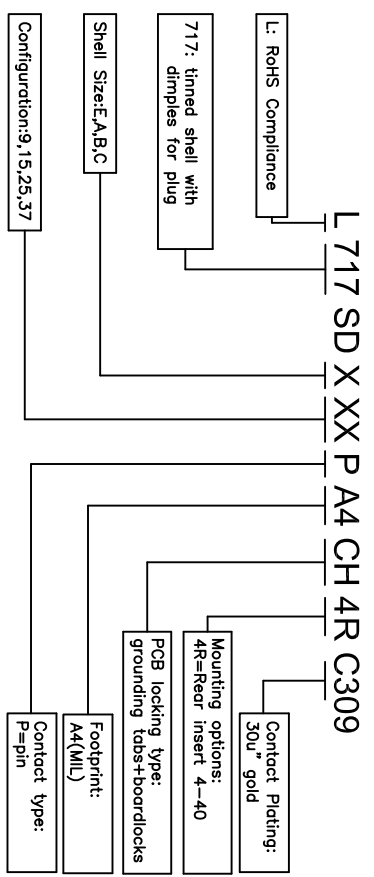

UNLESS OTHERWISE SPECIFIED

TOLERANCES	U.S.	METRIC	APPROVAL	DATE
XXX +/-	0.50	0.50	DRAWN	14/Apr/11
XX +/-	0.30	0.30	CHECKED	14/Apr/11
XXX +/-	0.20	0.20		

FOR MATERIALS AND FINISHES SEE NOTES
 REMOVE SHARP EDGES
 DIMENSIONS
 U/S FINISHES
 METRIC

DRAWING FILE :
 ANGLE OF PROJECTION

TITLE
 Right Angle Type, D-sub

SIZE DRAWING NO.
 A4 L717SDXXXPA4CH4RC309

SCALE NONE SHEET 1 OF 1