


# BLDC 36P16A 74.1.028D

## Brushless 3-Phase DC Motor



Rated Voltage	12	24	V
No Load Speed	2590	5200	rpm
Rated Speed	1680	4355	rpm
Cont. Power	10	26	W
Rated Torque	56	56	mNm
Cont. Stall Torque			
Current at rated Speed	1,5	1,42	A
Torque Constant		42,2	mNm/A
Efficiency at Duty Point	75	84	%
Weight		0,14	kg
Rotor Inertia		26,6	gcm <sup>2</sup>
Oper. Temp. Range		-20 / + 45	°C
Max. Temp. Rise		70	K

Motor Code: 120988800050

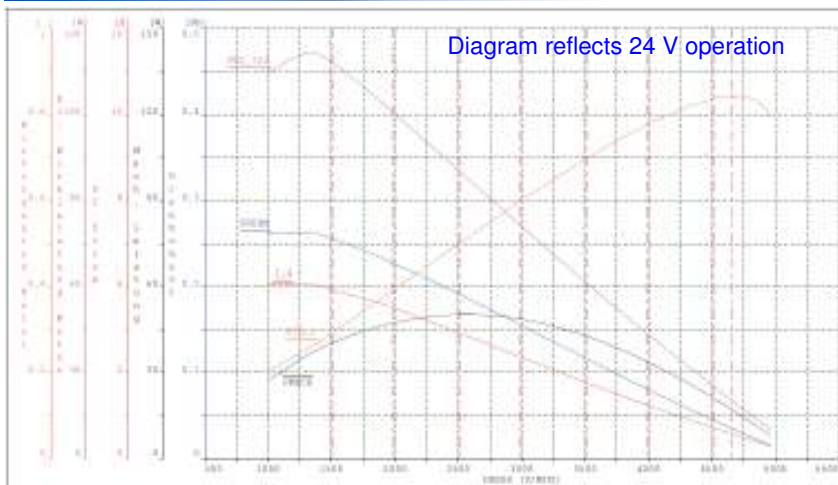

### Features

- High power-to-volume ratio
- High efficiency at duty point
- High reliability
- With or without integrated drive

### Typical Applications

- Pump drives
- Automation

