

“Stay Connected” with



HEYware Products

a PennEngineering® Company

HEYClip™ SunRunner® 90° Cable Clips

Double-Compression, Right Angle Design


| PANEL THICKNESS CLAMPING RANGE | | | | WIRE DIAMETER RANGE Maximum | PART NO. | DESCRIPTION | FOOTPRINT | | OVERALL HEIGHT | |
|---|-----|---------|-----|--|----------------|-----------------------------------|------------|----------------|----------------|---------------------|
| Minimum | | Maximum | | | | | A x B | | C | |
| in. | mm. | in. | mm. | | | | in. | mm. | in. | mm. |
| Single Wire 90° Clip - for panels up to .125" (3,2 mm) thick | | | | | | | | | | |
| .06 | 1,4 | .13 | 3,2 | .20" (5,1 mm)- .33" (8,3 mm) each cable | S6406 | SunRunner® 90° Clip 100 Pack | .82 x .78 | 20,8 x 19,8 | .39 | 9,9 |
| | | | | | S6446 | SunRunner 90° Clip Bulk | | | | |
| Double Wire 90° Clip - for panels up to .125" (3,2 mm) thick | | | | | | | | | | NEW PRODUCTS |
| .03 | 0,8 | .13 | 3,2 | .20" (5,1 mm)- .33" (8,3 mm) each cable | S6436 | SunRunner® 90°-2 Clip 100 Pack | .65 x .98 | 16,5 x 24,9 | .39 | 9,9 |
| | | | | | S6476 | SunRunner® 90°-2 Clip Bulk | | | | |
| Four Wire 90° Clip - for panels up to .125" (3,2 mm) thick | | | | | | | | | | NEW PRODUCTS |
| .06 | 1,4 | .13 | 3,2 | .20" (5,1 mm)- .30" (7,6 mm) each cable* | S6439** | SunRunner® 90°-4 Clip 100 Pack | .56 x 1.63 | 14,2 x 41,4 | .36 | 9,1 |
| | | | | | S6479** | SunRunner® 90°-4 Clip Bulk | | | | |

*Can accommodate up to three .33" (8,3 mm) diameter cables.


**SunRunner 90-4 parts are not cULus




- SunRunner 90° Cable Clips are designed to mount at a 90° angle to the original SunRunner®.
- The SunRunner 90° will accommodate a single cable from .20" (5,1 mm) to .30" (7,6 mm); SunRunner 90°-2 will accommodate (2) of these cables; SunRunner 90°-4 will accommodate (4) of these cables.
- SunRunner 90° Series is designed for use with PV modules mounted in the "landscape" mode. PV modules with shorter than normal junction box cables cannot be dressed out to the sides of the module. The SunRunner 90° Series will also allow the junction box cables to be run to the adjacent modules across the short side of the PV module frame.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant.

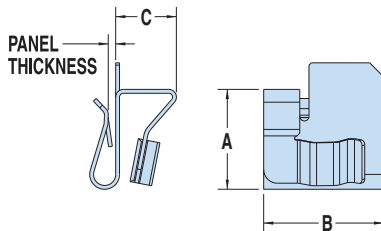


SunRunner® 90°

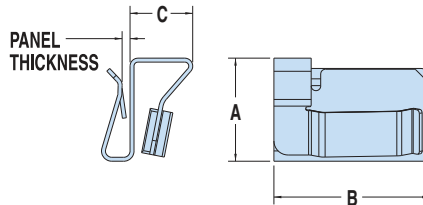

SunRunner® 90-2

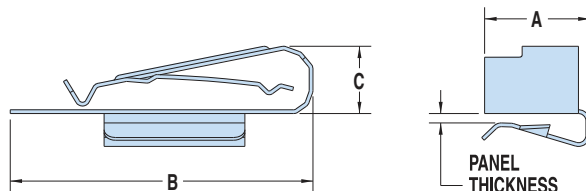

SunRunner® 90-4

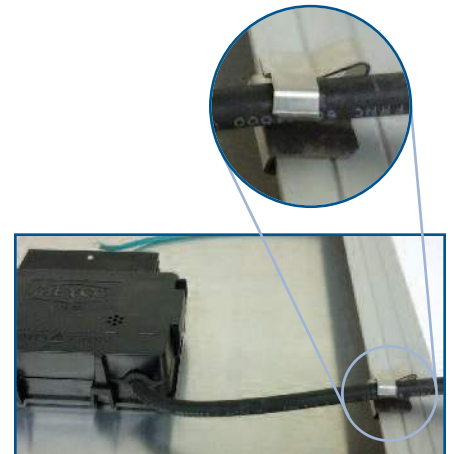

Material .020" thick heat treated 410 stainless steel (SunRunner 90-4)
.025" thick 304 stainless steel (SunRunner 90° and SunRunner 90-2)

Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523