



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

POSITION	LOAD @ "DETENT"	TOLERANCE
1	9	+/- 3 LBS
2	12	+/- 3 LBS
3	14	+/- 3 LBS
4	19	+/- 3 LBS
5	22	+/- 4 LBS
6	28	+/- 4 LBS
7	32	+/- 4 LBS
8	34	+/- 4 LBS

ACCURACY OF LOAD @ DETENT DEPENDS UPON MATCHING THE INDICATOR LINE EXACTLY WITH THE DESIRED SETTING

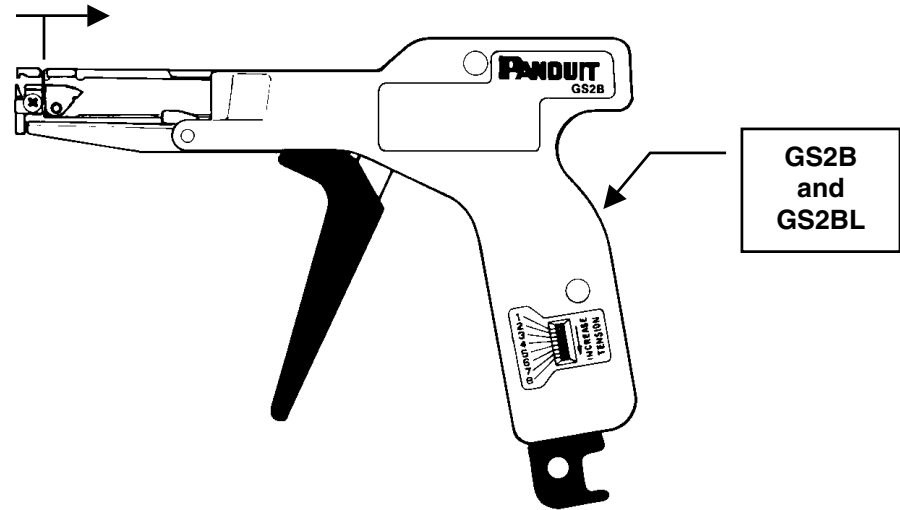

									 CORP. TINLEY PARK, ILLINOIS				
									GS2B, GS2BL TENSION ROD FORCE @ DETENT				
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± --- (.xxx) ± --- (.xx) ± --- ANGLES ± ---	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.			
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP	DRAWN BY: BLR	MATL: -----	SCALE NONE	DRAWING NO. WB24706A01	DWG A SIZE
02	1-03-06	BLR	ABJ	ADD: GS2BL	NONE	--	BKA		DATE: 3-25-03				
01	6-03-03	BLR	ABJ	RENAME TO: TENSION ROD FORCE @ DETENT	NONE	--	DLWE		CHK'D: ABJ				
00	3-25-03	BLR	ABJ	RELEASED	NONE	--	----						