



TOP VIEW

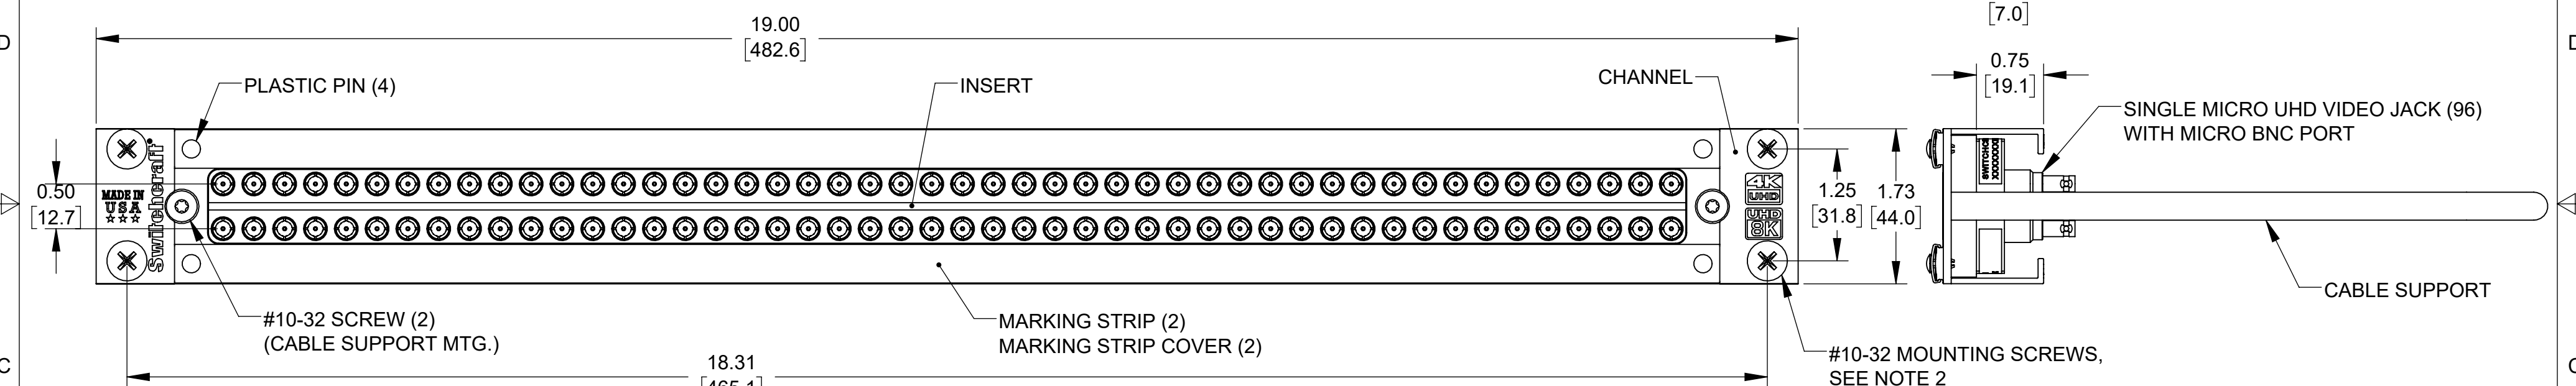

FRONT VIEW

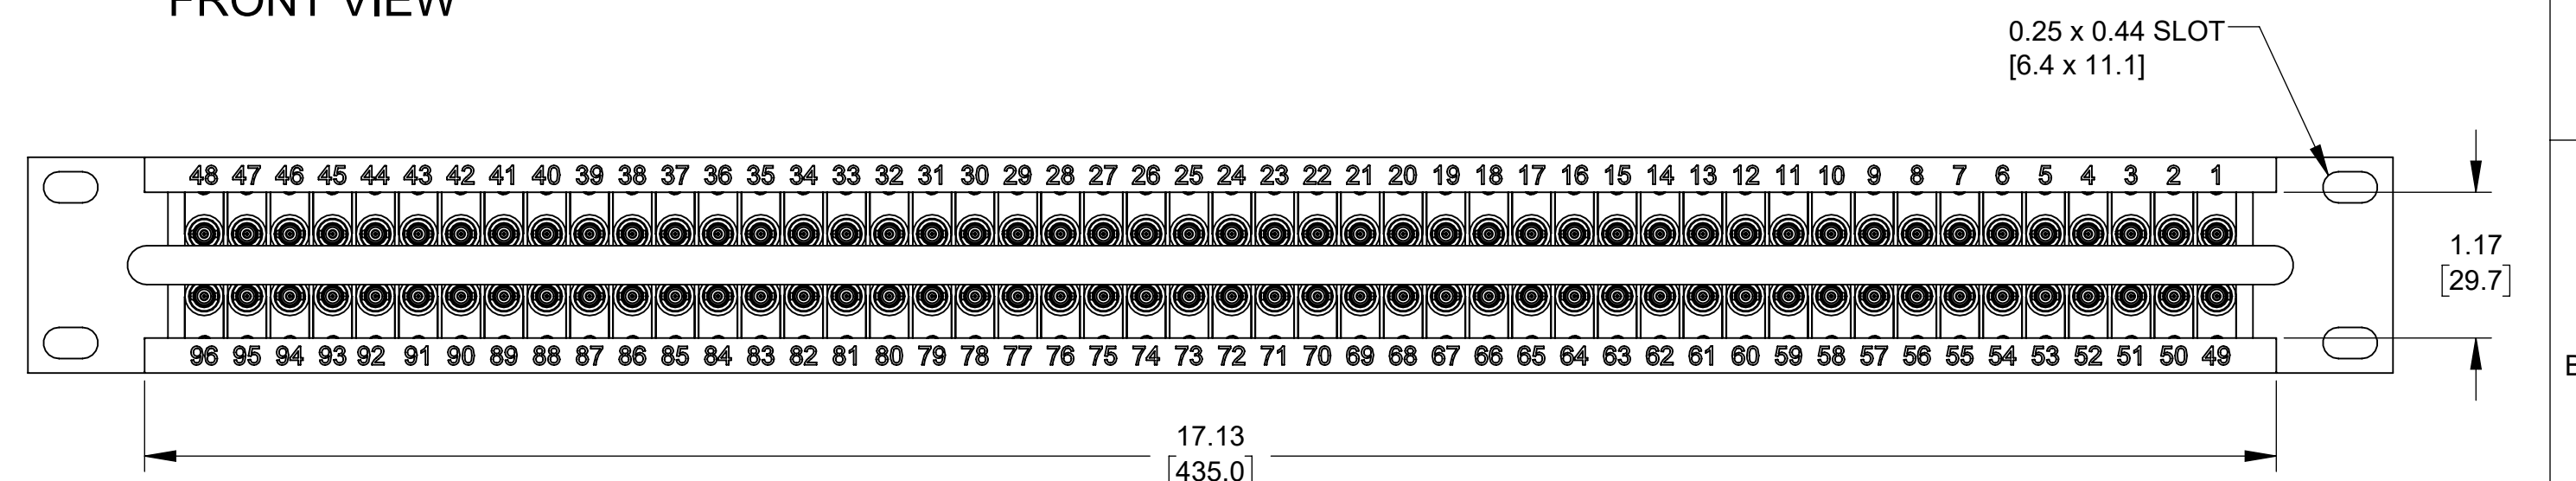

REAR VIEW

**NOTES:**  
 1. SPECIFICATIONS:  
**ELECTRICAL:**  
 MEETS SMPTE 2082-1  
 CHARACTERISTIC IMPEDANCE: 75 OHMS  
 CONTACT RESISTANCE: LESS THAN 50 MILLIOHMS  
**INTERFACE:**  
 RECOMMENDED SWITCHCRAFT MICRO PLUGS TO MEET SMPTE 2082-1  
**FRONT INTERFACE:**  
 PATCHCORDS VMMP\_05UHD  
 PATCHCORDS VMMP\_55UHD  
 LOOPING PLUG VMMLPUHD  
 DUAL TERMINATED PLUG VMMTPUHD  
 SINGLE TERMINATED PLUG VMMSTPUHD  
**REAR INTERFACE PORT:**  
 MATES WITH SWITCHCRAFT MICRO BNC UHDMB55 AND UHDMB05.  
**MECHANICAL:**  
 VIBRATION: PER MIL - STD 202, METHOD 201  
**MATERIAL:**  
 CHANNEL - ALUMINUM ALLOY, ANODIZED BRIGHT BLUE PEWTER  
 INSERT - THERMOPLASTIC, BLACK  
 MARKING STRIPS - THERMOPLASTIC, WHITE  
 MARKING STRIP COVERS - THERMOPLASTIC, CLEAR  
 PLASTIC PINS, JACK MTG. SCREWS - THERMOPLASTIC, NATURAL (WHITE)  
 JACK HOUSING: COPPER ALLOY, NICKEL PLATED  
 JACK CENTER CONTACTS: SPECIAL COPPER ALLOY, GOLD PLATED  
 JACK GROUND SPRINGS: STAINLESS STEEL  
 JACK INSULATOR: TEFLON  
 CABLE SUPPORT - STEEL, BLACK EPOXY  
 PATCHBAY MOUNTING SCREWS - STEEL, NICKEL PLATED.

2. K629N HARDWARE KIT (4 x #10-32 MOUNTING SCREWS) SHIPPED UNASSEMBLED WITH EACH PATCHBAY.  
 3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

|                                      |       |          |    |     |  |       |         |         |                |     |
|--------------------------------------|-------|----------|----|-----|--|-------|---------|---------|----------------|-----|
| UNLESS OTHERWISE SPECIFIED           |       |          |    |     | THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY. |       |         |         |                |     |
| 1. ALL DIMENSIONS IN INCHES [mm]     |       |          |    |     | SIZE   | WIDTH | MULT    | LBS/M   | TEMPER         |     |
| - TWO PLACE DECIMALS ±0.02 [0.5]     |       |          |    |     | FINISH   |       |         |         | MATERIAL       |     |
| - THREE PLACE DECIMALS ±0.005 [0.13] |       |          |    |     | FIRST USED ON  |       |         |         | SPEC No.       |     |
|                                      |       |          |    |     | SCALE  |       |         |         | Switchcraft®   |     |
|                                      |       |          |    |     | DATE DRAWN   | BY    | CHKD    | APVD    |                |     |
| A                                    | 28340 | 12/07/20 | PC | TJK | 7/18/19  | PNK   | 7/18/19 | 7/18/19 | SHEET 1 OF 1   |     |
| REVISIONS                            |       |          |    |     | NAME   |       |         |         | PART No.       | REV |
| DO NOT SCALE DRAWING                 |       |          |    |     | PATCHBAY, 48 X 2 UHD MICRO SINGLE VIDEO JACK, BNC, RoHS  |       |         |         | MMVPSMB48K1UHD | A   |