


PART NUMBER	LENGTH(L1)	LENGTH(L2)	TOLERANCE(L1&L2)
10123133-001LF	11CM	10.5CM	±0.8CM

COMPONENTS		
ITEM	QTY.	DESCRIPTION
1	4.0EA	LC MM CONNECTOR
2	"L" 1	(OM1) SPX ASSY(BLUE)-ARMORED
3	"L" 2	(OM1) SPX ASSY(RED)-ARMORED
4	2.0	HST(BLUE)
5	2.0	HST(RED)

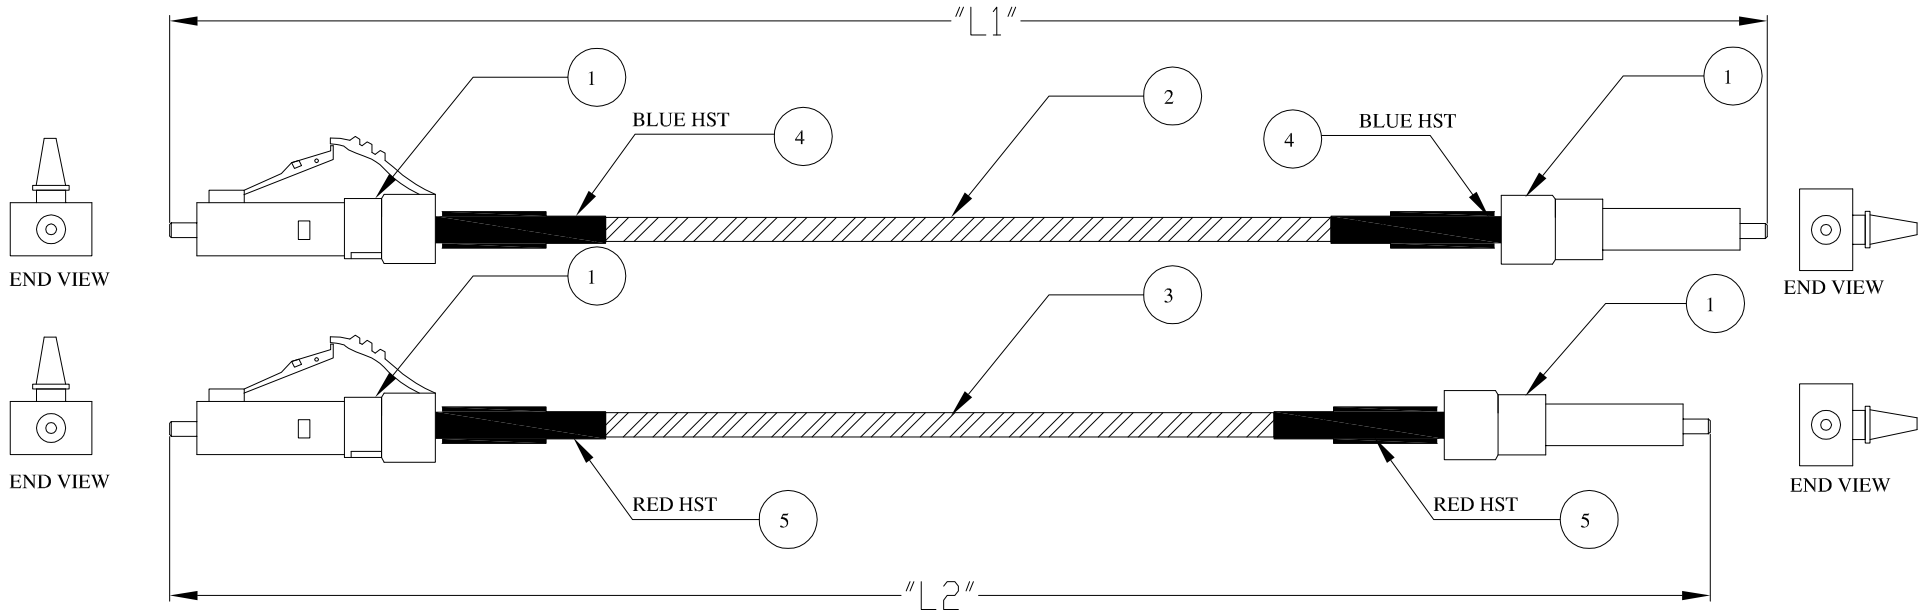

SPECIFICATIONS	
INSERTION LOSS@850/1300nm	≤ 0.5dB

NOTE:-  
1) MAINTAIN LENGTH (L1>L2).

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family	
-		✓				⊕		Fiber Optics	
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM		title	
A	-	D.CHARY	04/01/2013	angles	linear	↔		HARNESS(TOP) LC-LC ASSY (OM1)	
				0°±1°	.0±0.2	scale NTS		dwg no	
					.00±0.1			sheet 1 of 1	
					.000±.00X			10123133	
				dr	D.CHARY	22/10/2012		A3	
				enr	JTP	22/10/2012		type	
				chr	BINOY	22/10/2012		CUSTOMER Drawing	
				appd	BINOY	22/10/2012			
sheet index	revision	A							
	sheet	1							