

| | Ŧ | Q | | m | | C |
|---|---|---|---|---|---|---|
| r | | · | · | • | • | |





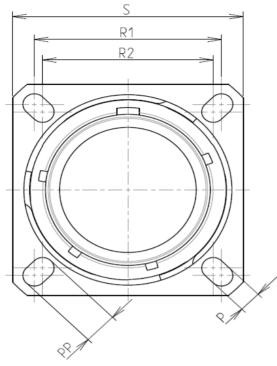

CHARACTERIST

4

ω

 \sim

_

| ے ت ا | П | т | 1 | | 0 | ω | | | 1 | | |
|--|--|--|---|--|---|---------------------------|--|--------------|-------|--|--|
| | R1 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 | ~ | | | | WWN AS EXAMPLE | | | 4 | | |
| CHARACTERISTICS | Keying Shown a | Connector dimension |] | | | | | | | | |
| -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum | Im | Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max | | | due to a use of the Pro the Specifications issued by | | ly with third party | | 2 | | |
| -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C | | VV THREAD M18x1-6g |] | A 15 10 201 | | D013S03BE | | | - | | |
| -Salt Spray : 500 hours | | | | A 15-10-201 ISS DATE | 6 First Release Latest modification - by | | | MOD N° | | | |
| | | | | Designed By: | | ess Steel Receptacle | EUSTOMER DRAWING | | | | |
| BASIC SERIES: 8D 0 - 13 S 03 B E SHELL TYPE : Square Flange Receptacle - 13 S 03 B E CONTACT TYPE : Standard Crimp Contact ORIENTATION : E ORIENTATION : E SHELL SIZE : 13 CONTACT TYPE : SOCKET(500 Matings) | | | | SCALE NA | | al linear ances: t | NPRDS / PROJECT 859 This document is the prop SOURIAU | erty of | .y of | | |
| | | | | gs) SOURIAU VVVV.SOURIAU.COIVI it must not be communicated w | | | it must not be reproduce communicated without per | mission | - | | |
| PLATING : S = Nickel | | CONTACT LAYO | 4 | FORMAT A3 | 8D | RIAU DRG N° 013S03BE-C | | SHEET 1/2 | | | |
| H G I | F | E | / | D | C | В | A | | | | |

| | 工 | ۵ | п П | m | D | 0 | |
|---|--------------------|--|-----|---|-----------------------|--|------------------------------------|
| | | Contact Layout | | | | | Panel Cutou |
| 4 | | 03 () () () () () () () () () () | | | | SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING | 0) |
| | Ctc A B C | 13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47 | | | | | im |
| ω | | | | | | Ø | ðА АА 81 ðT |
| - | F | | | | [| | |
| | a | | | | | SOURIAU shall not b due to a use of th the Specifications issue (professional | e Products wh ed by either of |
| N | | | | | | | Countr FR |
| | | | | | | PN: | 8D0139 |
| | | | | | A 15-2 | 0-2016 First Release | |
| | | | | | ISS I Designed By: | DATE Latest modification - b Date: | у |
| | | | | | тіті | .E Sta | ainless Ste |
| - | | | | | SCALE | | General linear Tolerances: ± |
| | | | | | SOUR | IAU WWW.SO | URIAU.C |
| | | | | | FORMAT A3 | | OURIAU 8D013S(|
| l | Н | G | F | E | D | С | |

