


AI-3245-TF-LW95-R 32mm Indicator

3541 Stop Eight Road • Dayton, Ohio 45414



Product Overview


- 32mm diameter, 3-28 VDC self-drive indicator
- 90 dBA minimum output (12 VDC @ 10 cm) and 4,500 Hz continuous tone
- ABS housing and 95mm long 26 AWG UL1007 lead wires
- Built-on mounting tabs for quick, easy mounting

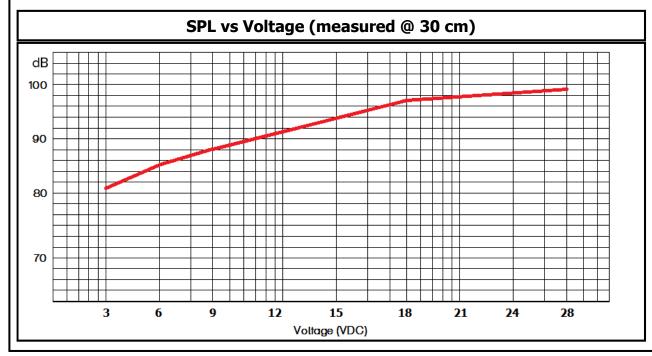








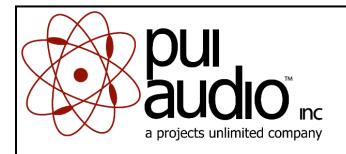

AI-3245-TF-LW95-R 32mm Indicator


Mechanical and Environment Testing			
Test Description	Test Condition		
High Temperature	+70°C (±2°C) with random humidity for 96 hours		
Low Temperature	-30°C (±2°C) with random humidity for 96 hours		
Humidity	40°C (±2°C) with 90% to 95% relative humidity for 96 hours		
Vibration	1.5 mm movement modulated at 10-55 Hz for two hours in three directions		
Drop Test	75 cm free fall onto wood board, 9 cycles		
Temperature Cycle Test	-40°C to 95°C, five 3 hour cycles		
After tests, part shall rest for 2 hours. Parts are then tested for clean, pure tones.			

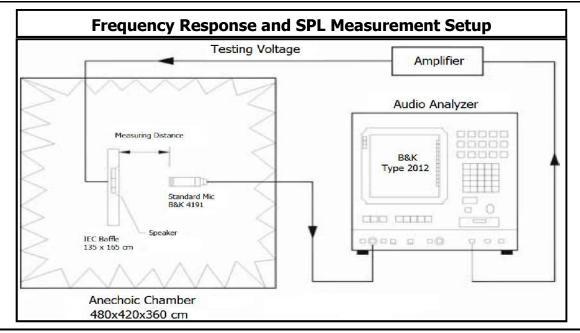


SPECIFICATIONS					
PARAMETERS	VALUES	UNITS			
RATED VOLTAGE	12	Vdc			
OPERATING VOLTAGE RANGE	3 ~ 28	Vdc			
RATED CURRENT (MAX)	5	mA			
MINIMUM SPL @ 10 CM	90	dBA			
RESONANT FREQUENCY	4,500 ± 500	Hz 0 pulse /sec °C °C			
TONE OR PULSE RATE	CONTINUOUS				
OPERATING TEMPERATURE	-20 ~ +60				
STORAGE TEMPERATURE	-30 ~ +70				
HOUSING MATERIAL	ABS	-			
TERMINAL MATERIAL	LEAD WIRE	-			
WEIGHT	5	grams			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHISTED. ©2003, Projects Unlimited Inc.

	REVISION HISTORY		
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	8/19/2004	
Α	REMOVED LEAD FREE ADDED RoHS NOTE	8/10/2005	
В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE &	3/12/2008	B.R.

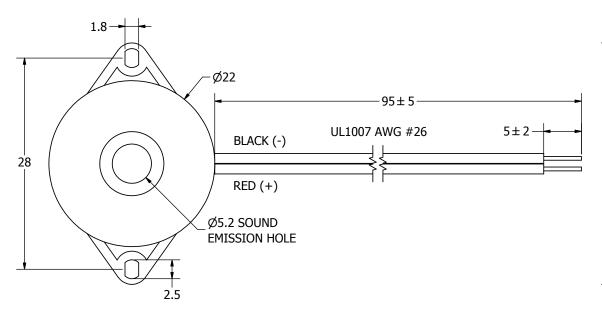

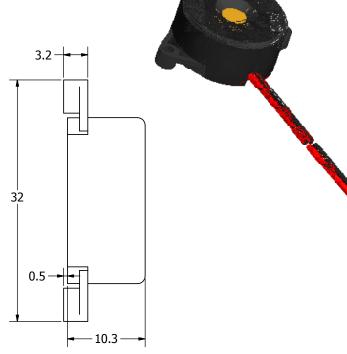

Date

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS,
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

AI-3245-TF-LW95-R.idw

Pul audio n a projects unlimited compar

Date

8/19/2004

Designed by

Checked by

R.W. 8/19/2004 3/12/2008 AI-3245-TF-LW95-R

Approved by

Indicator Edition Sheet 1/1

Date

Drawn Date