
## SMD POWER INDUCTORS





- Features
- 1. Lowest DCR/uH in this small package size.
- 2. Frequency range up to 5.0MHZ.
- 3. -55°C to +125°C operating temperature.
- 4. Handles high transient current spikes without saturation.
- 5. Composite construction providing extremely low buzz noise.




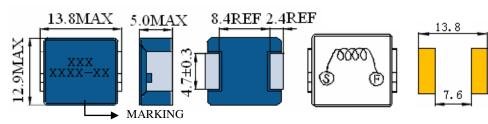


'n.

## **ELECTRICAL CHARACTERISTICS**

	1				
	Inductance	Test	DC	Saturation	Temperature
Part Number	(uH)	Frequency	Resistance	Current	Current <sub>(4)</sub>
	(1)		(Ω MAX)	$(A)^{(3)}$	(A)
			(2)		
SCIHP1350-1R5M	1.5	200KHZ	4.3m	35	18
SCIHP1350-2R2M	2.2	200KHZ	6.3m	28	17
SCIHP1350-4R7M	4.7	200KHZ	15m	21	11
SCIHP1350-5R6M	5.6	200KHZ	17.6m	19	10.5
SCIHP1350-6R8M	6.8	200KHZ	19.8m	18	10





- (1). Inductance tolerance  $\,\pm20\%$  tested at 0.25V, 0ADC and 25°C
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 20% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient
- (\*). Part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provisions may affect the temperature of the part. Part temperature should be verified in the end application.

## Click here for QUANTITY PER REEL & PACKING INFORMATION

Custom versions available upon request.

© 2019 Signal Transformer - Specification subject to change without notice. 12.19

