



DETAIL "F"

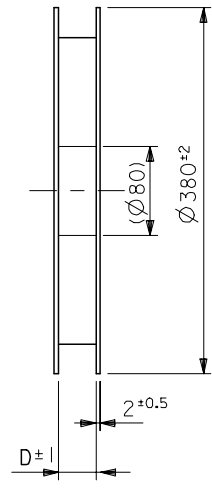

NOTES

1. 梱包数量：1000個/リール  
NUMBER OF CONNECTOR:1000PCS/REEL
2. リードテープ長さ  
LEAD TAPE LENGTH
3. トップテープの剥離強度：0.6±0.35N(60±35gf) (剥離方向は下図参照)  
PEELING OFF FORCE OF TOP TAPE:0.6±0.35N(60±35gf)  
(PEELING DIRECTION IS SHOWN IN FOLLOWING FIG.)  
 <剥離速度：300mm/min(参考)>  
 PEELING SPEED:300mm/min.  
 (REFERENCE)
4. 53398-\*\*-10 の詳細寸法については図面 SD-53398-\*\*-10 を参照下さい。  
RE DETAILED DIMENSIONS,SEE SD-53398-\*\*-10.
5. 材料 (MATERIAL)  
 キャリアテープ(CARRIER TAPE):ポリプロピレン(POLYPROPYLENE)  
 トップテープ (TOP TAPE): PET ,PE ,PEF  
 リール (REEL):ポリスチレン (P S) <リサイクル材含む>  
 POLYSTYREN(PS) <RECYCLE MATERIAL CONTAINED>

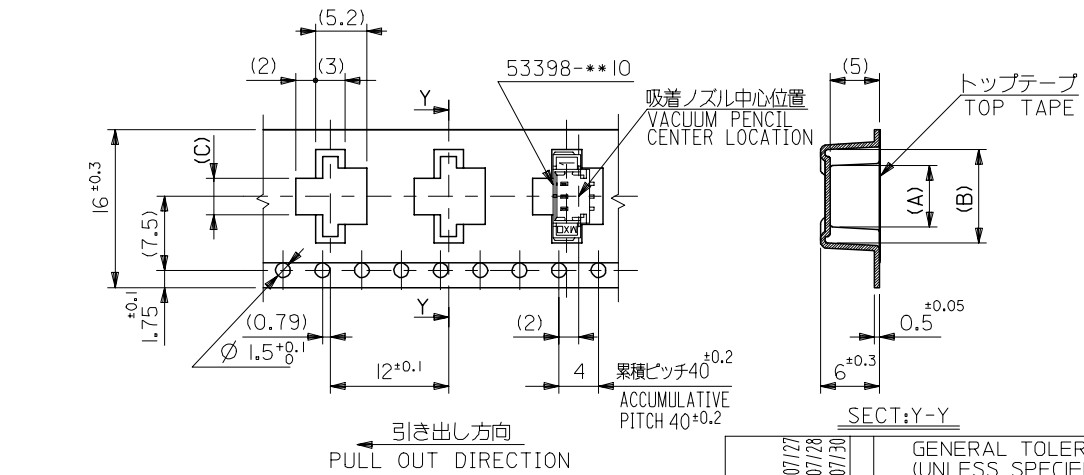

SECT:Y-Y

16幅テープ (TAPE WIDTH:16)

16	17.4	3.7	9.5	5.8	53398-0390	3
キャリアテープ幅 (CARRIER TAPE WIDTH)	D	2.45	8.25	4.55	53398-0290	2
		(C)	(B)	(A)	ENG. NO.	種数 (CKT.)

REVISED EC NO: DRAWN:MERIGUCHI 2004/07/27 CHK:K.K.ASAKAWA 2004/07/28 APPR:S.ICHIKAWA 2004/07/30	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	MM ONLY		---	METRIC		
	10 UNDER	±0.2	DRAWN BY	DATE	TITLE	
	10 OVER 30 UNDER	±0.25	K. TOJO	'93/04/13	1.25 W/B CONN. WAFER ASS'Y FOR SMT. EMBOSSED TAPE PACKAGE	
30 OVER	±0.3	CHECKED BY	DATE	MOLEX INCORPORATED		
ANGULAR	±3 °	YAMAGUCHI	'00/12/08			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	DOCUMENT NO.		SHEET NO.
		FUKUSHIMA	'00/12/08	SEE CHART SD-53398-**-90		1 OF 3
		MATERIAL NO.	DOCUMENT NO.		SHEET NO.	
		SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		A3				

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D


C

B


A

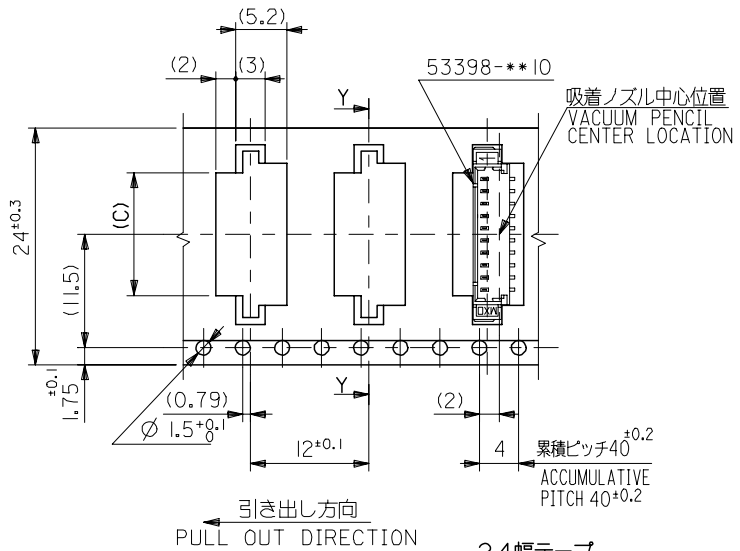


24幅テープ  
(TAPE WIDTH:24)

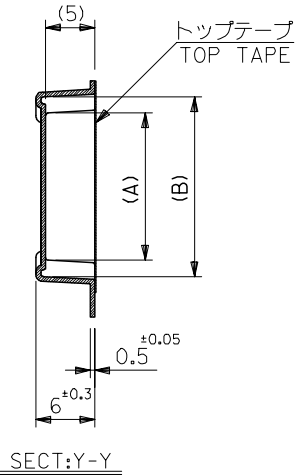

SECT:Y-Y

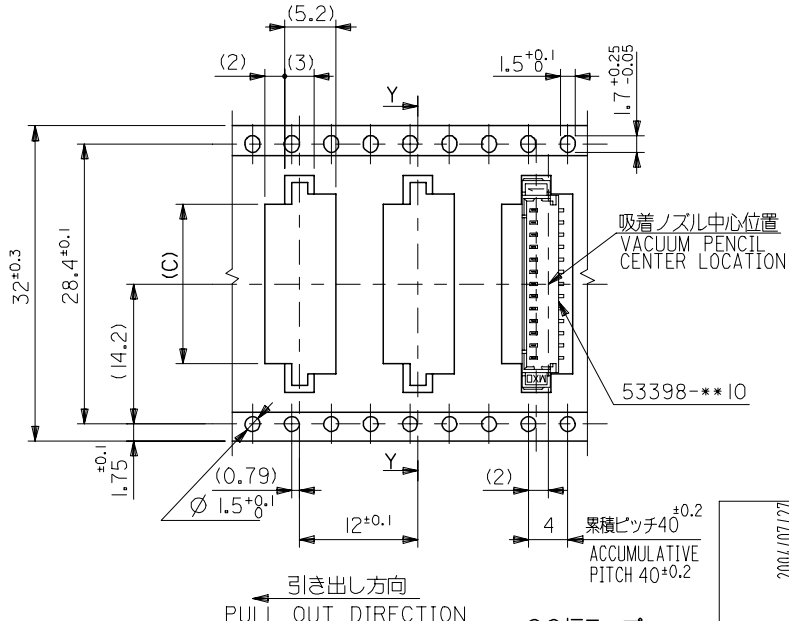

32幅テープ  
(TAPE WIDTH:32)

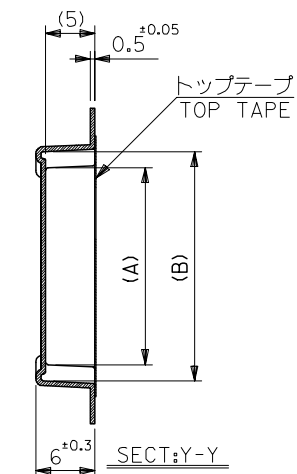

SECT:Y-Y

32	33.4	16.2	22	18.3	53398-1390	13
		14.95	20.75	17.05	-1290	12
24	25.4	13.7	19.5	15.8	-1190	11
		12.45	18.25	14.55	-1090	10
		11.2	17	13.3	-0990	9
		9.95	15.75	12.05	-0890	8
		8.7	14.5	10.8	-0790	7
		7.45	13.25	9.55	-0690	6
		6.2	12	8.3	-0590	5
		4.95	10.75	7.05	53398-0490	4
キャリアテープ幅 CARRIER TAPE WIDTH	D	(C)	(B)	(A)	ENG. NO.	種数 CKT.

REVISED EC NO: DRAWN BY: I GUCH CHKD BY: ASAKAW APP'R: S ICHIKAW REV	2004/07/27	2004/07/28	2004/07/30	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	10 UNDER		±0.2	10 OVER 30 UNDER	±0.25	DRAWN BY K. TOJO	DATE '93/04/13	TITLE 1.25 W/B CONN. WAFER ASS'Y FOR SMT. EMBOSSD TAPE PACKAGE		
	30 OVER		±0.3	ANGULAR	±3 °	CHECKED BY YAMAGUCH	DATE '00/12/08	MOLEX INCORPORATED		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			APPROVED BY FUKUSHIM		DATE '00/12/08	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-53398-**90	SHEET NO. 2 OF 3
	SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

10 9 8 7 6 5 4 3 2 1

F



E

D

C

B

A

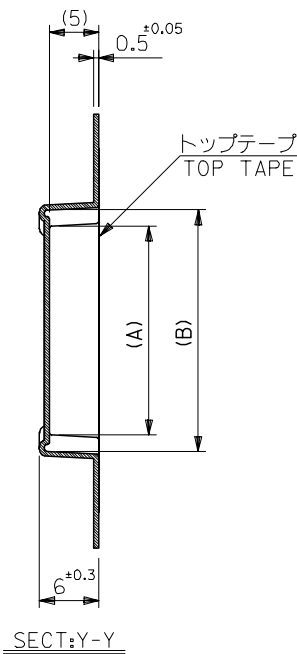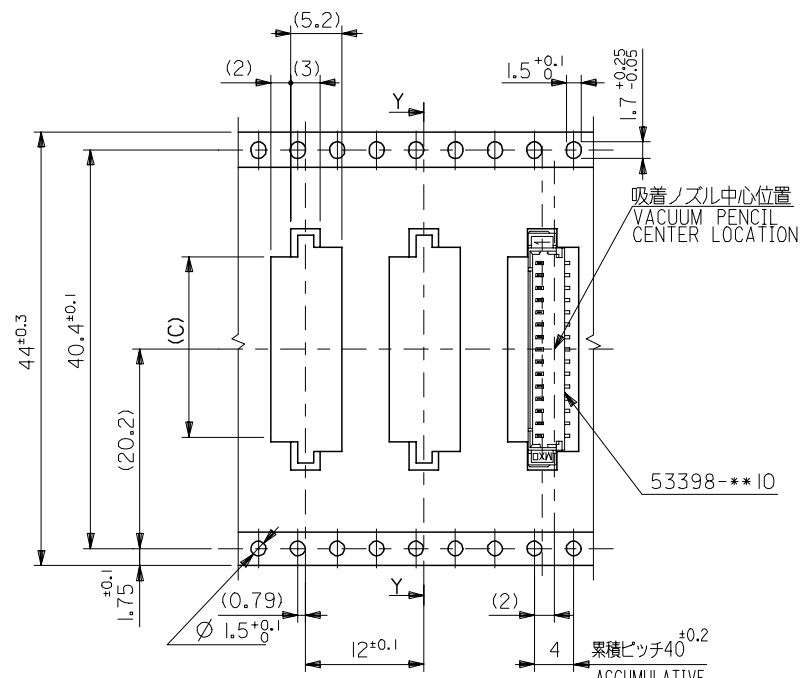

引き出し方向  
PULL OUT DIRECTION

44幅テープ  
(TAPE WIDTH:44)

44	45.4	18.7	24.5	20.8	53398-I590	I5
キャリアテープ幅 CARRIER TAPE WIDTH	D	(C)	(B)	(A)	ENG. NO.	種数 CKT.
		17.45	23.25	19.55	53398-I490	I4

REVISED EC NO: DRAWN:MERIGUCHI 2004/07/27 CHK:K.ASAKAWA 2004/07/28 APPR:S.ICHIKAWA 2004/07/30	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	$\pm 0.2$	DRAWN BY K. TOJO		DATE '93/04/13	TITLE 1.25 W/B CONN. WAFER ASS'Y FOR SMT. EMBOSSED TAPE PACKAGE	
	10 OVER 30 UNDER	$\pm 0.25$	CHECKED BY YAMAGUCHI		DATE '00/12/08	MOLEX INCORPORATED	
	30 OVER	$\pm 0.3$	APPROVED BY FUKUSHIM		DATE '00/12/08	SHEET NO. 3 OF 3	
	ANGULAR	$\pm 3^\circ$	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-53398-**90		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		