

HC-B 24-KML-80/M1M40

Order No.: 1586701

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1586701>Coupling housing, with single locking latch, height 79 mm, without
screw connection, 1x M40**Commercial data**

| | |
|--------------------------|---|
| GTIN (EAN) |  4 046356 426794 |
| Note | Made-to-order |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 497 (PC-2009) |

Product notesWEEE/RoHS-compliant since:
06/18/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data**General data**

| | |
|--------|---|
| Note | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24 |
| Height | 79 mm |
| Width | 43 mm |
| Length | 120 mm |

| | |
|---------------------------------|---------------------------------|
| Locking type | With single locking latch |
| Type of the screw connection | 1x M40 |
| Wrench size, union nut | 40 mm |
| External cable diameter | 18 mm ... 32 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Cable gland material | Nickel-plated brass |
| Cable seal material | NBR |
| Material lock | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Diagrams/Drawings

Dimensioned drawing

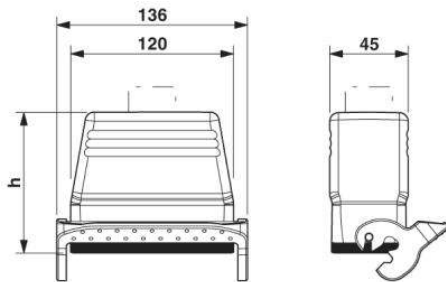

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;