View on mating side

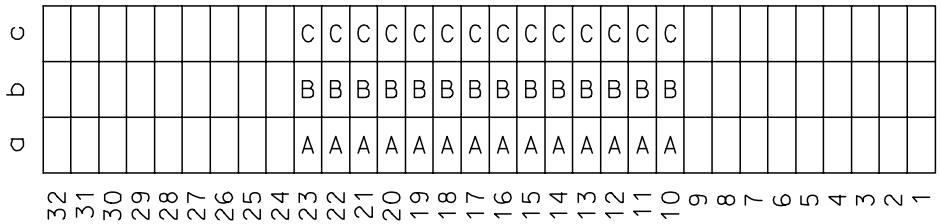

A = 14 standard contacts L=3
B = 14 standard contacts L=3
C = 14 standard contacts L=3

S = 42 total number of contacts

Marking	Standard
Performance level	G1/0 = CONTACT AREA LEVEL1/TERMINATION TIN
Flux proof	NO
Fixing clip	no
Dimensions	SDA-85009-0002 sht.1
Technical Data	PS-85003-0001

Contact symbol	Perform. level	Contact position number
C	G1/0	c10-23
B	G1/0	b10-23
A	G1/0	a10-23

PRE-RELEASE REFERENCE USE ONLY

EC NO: 12004-0554		
DRWN:SHIVASHA	2004/07/22	
CH'KD:KP	2004/07/26	
APPR:DGDATHAT	2004/08/05	
DESCRIPTION		
A	REV	

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.1	± ---
1 PLACE	± 0.2	± ---
ANGULAR ± 1 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: ---	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: SHIVA	DATE: 2004/06/11	TITLE: 42 POS MALE CONNECTOR ACC. DIN 41612 STYLE M CONTACTS ARRANGEMENT	
CHECKED BY: KPRASAD	DATE: 2004/06/11		
APPROVED BY: DATHA	DATE: 2004/06/11	molex MOLEX INCORPORATED	
MATERIAL NO.: 85009-0854		DOCUMENT NO.: SDA-85009-0854	SHEET NO.: 1 OF 1

A4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION