


Data Sheet | Item Number: 221-500

Mounting carrier; 221 Series - 4 mm²; for DIN-35 rail mounting/screw mounting;
orange

<https://www.wago.com/221-500>

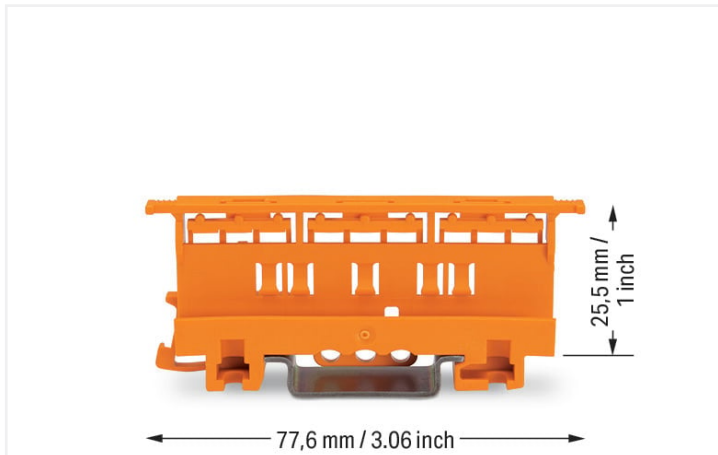

Color: ■ orange

Physical data

Width	17.5 mm / 0.689 inches
Height	77.6 mm / 3.055 inches
Depth from upper-edge of DIN-rail	25.5 mm / 1.004 inches

Mechanical data

Mounting type	DIN-35 rail Screw mount
Suitable	for 2-, 3- and 5-conductor 221 Series Splicing Connectors (4 mm ²)

Material data

Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.294 MJ
Weight	9.6 g

Commercial data

eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143421942
Customs tariff number	39269097900

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 221-500



Documentation

Bid Text

221-500	19.02.2019	xml 2.72 KB	
221-500	23.01.2019	docx 14.58 KB	
ausschreiben.de 221-500			

CAD/CAE-Data

CAD data

2D/3D Models 221-500



CAE data

EPLAN Data Portal
221-500



ZUKEN Portal 221-500



1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-833

Marking strips; 25 m on roll; 6 mm wide; plain; Self-adhesive; white

1.1.2 Mounting adapter

1.1.2.1 Mounting accessories



Item No.: 222-510

Angled DIN-rail adapter; in combination with mounting carrier; 221-500 or 222-500; for DIN-35 rail mounting; gray



Item No.: 222-505

Strain relief plate; for mounting carrier; 221 or 222 Series, can be snapped


Installation Notes

Conductor termination



CAGE CLAMP® connection:
Conductor termination with connectors
fitted in a mounting carrier

Removing a conductor.



Inserting a connector into the mounting
carrier.

Inserting a connector into the mounting
carrier.

Removing a connector from the mounting
carrier.




Securing a strain relief plate (222-505) to
the mounting carrier.

Snapping the angled DIN-rail adapter
(222-510) onto the mounting carrier.

Horizontal mounting on DIN-35 rail using
an angled DIN-rail adapter

Horizontal mounting on DIN-35 rail using
an angled DIN-rail adapter



Horizontal screw mounting with strain relief
plate on a flat surface

Vertical mounting with strain relief plate
on DIN-35 rail

Strain relief via cable ties on the mount-
ing carrier (transverse to the connecto-
rs' wiring direction) – clamping units labeled
via marking strips (210-334)

Vertical screw mounting with strain relief
plate on a flat surface



Mounting carrier on a DIN-35 rail

Testing



Testing connectors via test slots on top of
the carrier.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com