

STANDARD EXECUTIONS

- **MSM-TW-A:** AISI 304 stainless steel clamping screw and nut.
- **MSM-TW-B:** GN 300.1 adjustable handle, lever in RAL 9006 grey colour, AISI 303 stainless steel screw and spacer, AISI 304 stainless steel nut.
- **SW** index: aluminium, epoxy resin coating, RAL 9005 black colour
- **MT** index: natural aluminium, matte finish.



LOCKING SPRINGS

Stainless steel.

FEATURES AND APPLICATIONS

MSM-TW pivoting connecting clamps allow the fixing of tubes or shafts. The particular prism shape of the clamping parts facilitates the adjustment to the diameter of the tube or shaft.

The pressure springs make the locking and unlocking operations quick and easy.

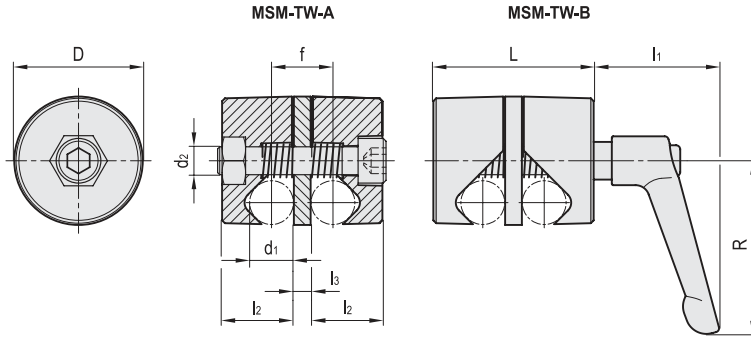

Conversion Table	
1 mm = 0.039 inch	
D	
mm	inch
28	1.10
32	1.26
36	1.42
46	1.81

MSM-TW-A-MT

Code	Description	d2	d1	L	D	l2	l3	f	⚖
500751	MSM-TW-28-8-A-MT	M6	8	33	28	14	5	13	52
500761	MSM-TW-32-10-A-MT	M8	10	45	32	20	5	15	96
500771	MSM-TW-36-12-A-MT	M8	12	47	36	21	5	17	118
500781	MSM-TW-46-16-A-MT	M10	16	56	46	25	6	22	224

MSM-TW-A-SW

500752	MSM-TW-28-8-A-SW	M6	8	33	28	14	5	13	52
500762	MSM-TW-32-10-A-SW	M8	10	45	32	20	5	15	96
500772	MSM-TW-36-12-A-SW	M8	12	47	36	21	5	17	118
500782	MSM-TW-46-16-A-SW	M10	16	56	46	25	6	22	224

MSM-TW-B-MT

Code	Description	d2	d1	L	D	R	l1	l2	l3	f	⚖
500753	MSM-TW-28-8-B-MT	M6	8	33	28	45	35	14	5	13	80
500763	MSM-TW-32-10-B-MT	M8	10	45	32	63	45	20	5	15	172
500773	MSM-TW-36-12-B-MT	M8	12	47	36	63	45	21	5	17	195
500783	MSM-TW-46-16-B-MT	M10	16	56	46	78	55	25	6	22	354

MSM-TW-B-SW

500754	MSM-TW-28-8-B-SW	M6	8	33	28	45	35	14	5	13	80
500764	MSM-TW-32-10-B-SW	M8	10	45	32	63	45	20	5	15	172
500774	MSM-TW-36-12-B-SW	M8	12	47	36	63	45	21	5	17	195
500784	MSM-TW-46-16-B-SW	M10	16	56	46	78	55	25	6	22	354