

1624086

https://www.phoenixcontact.com/us/products/1624086

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

M23, Cable connector, series: CA, angled, shielded: yes, SPEEDCON, No. of pos.: 16+2+FE, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, cable diameter range: 6 mm ... 10 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1245096



Your advantages

- · Angled cable outlet for confined spaces
- · Can be adapted to various applications, thanks to adjustable cable outlet direction
- · Safe use in the field, thanks to high degree of protection
- · Connector for flexible on-site assembly
- · Consistent EMC protection for reliable transmission of signals
- · Reduced connection time with SPEEDCON fast locking system
- · Crimping connection: vibration- and temperature-resistant assembly

Commercial data

Item number	1624086
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB33
Product key	ABRAED
Catalog page	Page 91 (C-2-2019)
GTIN	4055626230764
Weight per piece (including packing)	141.47 g
Weight per piece (excluding packing)	141.47 g
Customs tariff number	85366990
Country of origin	DE



1624086

https://www.phoenixcontact.com/us/products/1624086

Technical data

Notes

	General	Order crimp contacts $16 \times \emptyset 1$ mm, $2 \times \emptyset 1.5$ mm, $1 \times \emptyset 1.5$ (PE) separately		
Product properties				
	Product type	Circular connector (cable-side)		

Connector

Insulating body

Note	Order information: Order crimp contacts 16x Ø 1 mm, 2x Ø 1. 5 mm, 1x Ø 1.5 mm (FE, first) separately
Coding	N
Insulation body material	PA 6.6
Connection method	Crimp connection
Contact switching type	Pin
Application	Signal
Number of positions	19
Direction of rotation	Standard
Connection profile	16+2+FE
Contact diameter Power contacts	1.5 mm
Litz wire cross-section Power contacts min.	0.08 mm²
Litz wire cross-section Power contacts max.	1 mm²
Rated current Power contacts	10 A
Note	for max. connection cross section
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts min.	0.08 mm²
Litz wire cross-section Signal contacts max.	1 mm²
Nominal current per signal contact	8 A
Rated voltage Signal contact	48 V AC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing



1624086

https://www.phoenixcontact.com/us/products/1624086

Housing material	Metal	
Type of locking	SPEEDCON	
Pg screw connection	none	
Degree of protection (plugged in)	IP67	
Thread type	M23	
Seal		
External cable diameter	6 mm 10 mm	
Seal material	NBR	




1624086

https://www.phoenixcontact.com/us/products/1624086

Drawings

Dimensional drawing

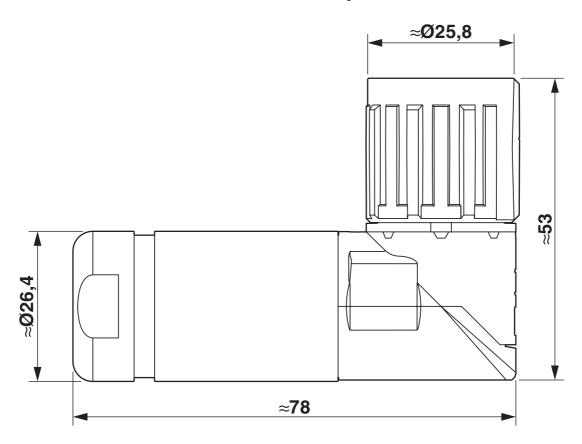


Dimensional drawing



1624086

https://www.phoenixcontact.com/us/products/1624086

Schematic diagram

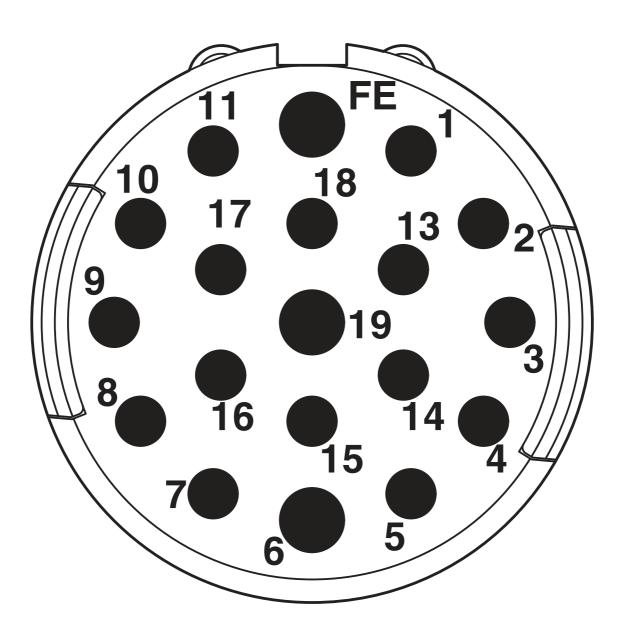

Connector pin assignment



1624086

https://www.phoenixcontact.com/us/products/1624086

Classifications

UNSPSC 21.0

ECLASS

Е	ECLASS-11.0	27440102	
E	ECLASS-12.0	27440116	
Е	ECLASS-13.0	27440116	
ETIM			
Е	ETIM 8.0	EC002635	
UNSPSC			

39121400



1624086

https://www.phoenixcontact.com/us/products/1624086

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"



1624086

https://www.phoenixcontact.com/us/products/1624086

Accessories

RC-15P2010 - Crimp contact

1623776

https://www.phoenixcontact.com/us/products/1623776



Crimp contact, Pin, turned, contact diameter: 1 mm, crimp range: $0.08~\text{mm}^2$... $0.22~\text{mm}^2$, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1244971

RC-15P2020 - Crimp contact

1623777

https://www.phoenixcontact.com/us/products/1623777



Crimp contact, Pin, turned, contact diameter: 1 mm, crimp range: $0.14~\text{mm}^2$... $0.56~\text{mm}^2$, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1244971



1624086

https://www.phoenixcontact.com/us/products/1624086

RC-15P2030 - Crimp contact

1623778

https://www.phoenixcontact.com/us/products/1623778



Crimp contact, Pin, turned, contact diameter: 1 mm, crimp range: $0.5 \text{ mm}^2 \dots 1 \text{ mm}^2$, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1244972

RC-15P2200 - Crimp contact

1627292

https://www.phoenixcontact.com/us/products/1627292



Crimp contact, Pin, turned, contact diameter: 1.5 mm, crimp range: $0.08~\text{mm}^2$... $0.22~\text{mm}^2$, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1245475



1624086

https://www.phoenixcontact.com/us/products/1624086

RC-15P2300 - Crimp contact

1627291

https://www.phoenixcontact.com/us/products/1627291



Crimp contact, Pin, turned, contact diameter: 1.5 mm, crimp range: 0.14 mm 2 ... 0.56 mm 2 , Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1245475

RC-15P2000 - Crimp contact

1623779

https://www.phoenixcontact.com/us/products/1623779



Crimp contact, Pin, turned, contact diameter: 1.5 mm, crimp range: $0.5~\text{mm}^2$... 1 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1244973



1624086

https://www.phoenixcontact.com/us/products/1624086

RC-15P2100 - Crimp contact

1623780

https://www.phoenixcontact.com/us/products/1623780



Crimp contact, Pin, leading, turned, contact diameter: 1.5 mm, crimp range: $0.5 \, \text{mm}^2 \dots 1 \, \text{mm}^2$, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1244974

RC-Z2058 - Protective cap

1604223

https://www.phoenixcontact.com/us/products/1604223



Plastic protection cap for connectors with M23 knurled nut



1624086

https://www.phoenixcontact.com/us/products/1624086

RC-Z2468 - Protective cap

1611796

https://www.phoenixcontact.com/us/products/1611796



Plastic protection cap, antistatic, for connectors with M23 knurled nut

CA-Z0077 - Metal protective cap

1627224

https://www.phoenixcontact.com/us/products/1627224



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1245447



1624086

https://www.phoenixcontact.com/us/products/1624086

RF-Z0014 - Color-coding

1620588

https://www.phoenixcontact.com/us/products/1620588

Color-coding, color: green



RF-Z0015 - Color-coding

1620592

https://www.phoenixcontact.com/us/products/1620592

Color-coding, color: orange





1624086

https://www.phoenixcontact.com/us/products/1624086

RF-Z0016 - Color-coding

1620593

https://www.phoenixcontact.com/us/products/1620593

Color-coding, color: black



RF-Z0003 - Square mounting flange

1607905

https://www.phoenixcontact.com/us/products/1607905



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1242369



1624086

https://www.phoenixcontact.com/us/products/1624086

SF-Z0028 - Torque screwdriver

1607456

https://www.phoenixcontact.com/us/products/1607456



Torque screwdriver, series: RC

SF-Z0027 - Hook wrench

1607455

https://www.phoenixcontact.com/us/products/1607455



Hook wrench, series: RC



1624086

https://www.phoenixcontact.com/us/products/1624086

RF-Z0007 - Special wrench

1614347

https://www.phoenixcontact.com/us/products/1614347

Special wrench, series: RF



Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com