

# BC337/338

## **Switching and Amplifier Applications**

- Suitable for AF-Driver stages and low power output stages
- Complement to BC327/BC328



1. Collector 2. Base 3. Emitter

# **NPN Epitaxial Silicon Transistor**

## **Absolute Maximum Ratings** T<sub>a</sub>=25°C unless otherwise noted

Symbol	Parameter	Value	Units	
V <sub>CES</sub>	Collector-Emitter Voltage			
	: BC337	50	V	
	: BC338	30	V	
V <sub>CEO</sub>	Collector-Emitter Voltage			
	: BC337	45	V	
	: BC338	25	V	
V <sub>EBO</sub>	Emitter-Base Voltage	5	V	
I <sub>C</sub>	Collector Current (DC)	800	mA	
P <sub>C</sub>	Collector Power Dissipation	625	mW	
TJ	Junction Temperature	150	°C	
T <sub>STG</sub>	Storage Temperature	-55 ~ 150	°C	

## Electrical Characteristics T<sub>a</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> =10mA, I <sub>B</sub> =0				
	: BC337		45			V
	: BC338		25			V
BV <sub>CES</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> =0.1mA, V <sub>BE</sub> =0				
	: BC337		50			V
	: BC338		30			V
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	5			V	
I <sub>CES</sub>	Collector Cut-off Current					
	: BC337	V <sub>CE</sub> =45V, I <sub>B</sub> =0		2	100	nA
	: BC338	V <sub>CE</sub> =25V, I <sub>B</sub> =0		2	100	nA
h <sub>FE1</sub>	DC Current Gain	V <sub>CE</sub> =1V, I <sub>C</sub> =100mA	100		630	
$h_{FE2}$		V <sub>CE</sub> =1V, I <sub>C</sub> =300mA	60			
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> =500mA, I <sub>B</sub> =50mA			0.7	V
V <sub>BE</sub> (on)	Base Emitter On Voltage	V <sub>CE</sub> =1V, I <sub>C</sub> =300mA			1.2	V
f <sub>T</sub>	Current Gain Bandwidth Product	V <sub>CE</sub> =5V, I <sub>C</sub> =10mA, f=50MHz		100		MHz
$C_{ob}$	Output Capacitance	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz		12		pF


# **h**<sub>FE</sub> Classification


Classification	16	25	40
h <sub>FE1</sub>	100 ~ 250	160 ~ 400	250 ~ 630
h <sub>FE2</sub>	60-	100-	170-






TO-92

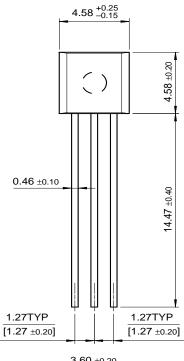

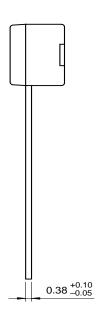



### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT™	ImpliedDisconnect™	PACMAN™	SPM™
ActiveArray™	FACT Quiet series™	ISOPLANAR™	POP™	Stealth™
Bottomless™	FAST <sup>®</sup>	LittleFET™	Power247™	SuperSOT™-3
CoolFET™	FASTr™	MicroFET™	PowerTrench <sup>®</sup>	SuperSOT™-6
CROSSVOLT™	FRFET™	MicroPak™	QFET™	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	GTO™	MSX™	QT Optoelectronics™	TinyLogic™
E <sup>2</sup> CMOS™	HiSeC™	MSXPro™	Quiet Series™	TruTranslation™
EnSigna™	$I^2C^{TM}$	OCXTM	RapidConfigure™	UHC™
Across the board.	. Around the world.™	OCXPro™	RapidConnect™	UltraFET®
The Power Franc	hise™	OPTOLOGIC <sup>®</sup>	SILENT SWITCHER®	VCX™
Programmable Ad	ctive Droop™	OPTOPLANAR™	SMART START™	

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2002 Fairchild Semiconductor Corporation

Search:

Go

Home >> Find products >>

## **BC338**

NPN Epitaxial Silicon Transistor

#### **Contents**

Features

Qualification Support

- Applications
- Product status/pricing/packaging
- Order Samples

#### **Features**

- Suitable for AF-Driver stages and low power output stages
- Complement to BC327/BC328

back to top

**Applications** 

**Switching and Amplifier** 

back to top

Product status/pricing/packaging

BUY

BUY

Datasheet Download this datasheet



e-mail this datasheet



This page Print version

#### **Related Links**

Request samples

How to order products

**Product Change Notices** (PCNs)

Support

Sales support

Quality and reliability

Design center

Product	Product status	Pb-free Status	Pricing*	Package type	Leads	Packing method	Package Marking Convention**
BC338	Full Production	Full Production	\$0.079	<u>TO-92</u>	3	BULK	Line 1: <b>\$Y</b> (Fairchild logo) & <b>Z</b> (Asm. Plant Code) & <b>3</b> (3-Digit Date Code) Line 2: BC338
BC33816BU	Full Production	Full Production	\$0.0296	<u>TO-92</u>	3	BULK	<u>Line 1:</u> BC338 <u>Line 2:</u> 16 <u>Line 3:</u> -&3
BC33816TA	Full Production		\$0.0296	<u>TO-92</u>	3	АММО	Line 1: BC338 Line 2: 16 Line 3: -&3

		Full Production					
BC33825BU	Full Production	Full Production	\$0.0296	<u>TO-92</u>	3	BULK	Line 1: BC338 Line 2: 25 Line 3: -&3
BC33825TA	Full Production	Full Production	\$0.0296	<u>TO-92</u>	3	AMMO	Line 1: BC338 Line 2: 25 Line 3: -&3
BC33840BU	Full Production	Full Production	\$0.0296	<u>TO-92</u>	3	BULK	Line 1: BC338 Line 2: 40 Line 3: -&3
BC33840TA	Full Production	Full Production	\$0.0296	<u>TO-92</u>	3	AMMO	Line 1: BC338 Line 2: 40 Line 3: -&3
BC338BU	Full Production	Full Production	\$0.0296	<u>TO-92</u>	3	BULK	Line 1: BC338 Line 3: -&3
BC338TF	Full Production	Full Production	\$0.0296	<u>TO-92</u>	3	TAPE REEL	Line 1: BC338 Line 3: -&3
BC338TFR	Full Production	Full Production	\$0.0296	TO-92	3	TAPE REEL	Line 1: BC338 Line 3: -&3

<sup>\*</sup> Fairchild 1,000 piece Budgetary Pricing

\*\* A sample button will appear if the part is available through Fairchild's on-line samples program. If there is no sample button, please contact a Fairchild distributor to obtain samples



Indicates product with Pb-free second-level interconnect. For more information click here.

Package marking information for product BC338 is available. Click here for more information.

### back to top

## **Qualification Support**

Click on a product for detailed qualification data

Product
BC338
BC33816BU
BC33816TA
BC33825BU
BC33825TA
BC33840BU
BC33840TA
BC338BU
BC338TF
BC338TFR

## back to top

## © 2007 Fairchild Semiconductor



Products | Design Center | Support | Company News | Investors | My Fairchild | Contact Us | Site Index | Privacy Policy | Site Terms & Conditions | Standard Terms & Conditions |