

**Customer Part:**

**Description**

- LVPECL output crystal oscillator using a high frequency fundamental crystal to give very low jitter. Hermetically sealed ceramic package with a seam sealed metal lid.
- Model IQXO-624
- Model Issue number 2
- Note: Operating temperature ranges -40 to 105°C and -40 to 125°C are intended for industrial use and not for safety critical applications such as automotive. Please contact IQD for alternative options.

**Frequency Parameters**

- Frequency 156.250MHz
- Frequency Stability  $\pm 50.00$ ppm
- Operating Temperature Range -40.00 to 105.00°C
- Ageing  $\pm 3$ ppm max per year @ 25°C

**Electrical Parameters**

- Supply Voltage 3.3V  $\pm 5\%$
- Current Draw 50.000mA

**Output Details**

- Output Compatibility LVPECL
- Drive Capability 50 $\Omega$  terminated to Vs-2.0V
- Rise and Fall Time 0.5ns max
- Duty Cycle 45/55%
- Output Voltage Levels:  
Output Low (VOL): 1.680V max  
Output High (VOH): 2.275V min

**Output Control**

- Standby Operation:  
Logic '1' (70% Vs min) to pad 1 enables oscillator output.  
Logic '0' (30% Vs max) to pad 1 disables oscillator output.  
No connection to pad 1 enables oscillator output due to internal pull-up resistor.
- Standby Current: 10 $\mu$ A max
- Start-up Time: 10ms max

**Noise Parameters**

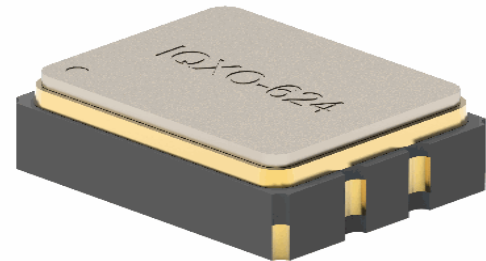
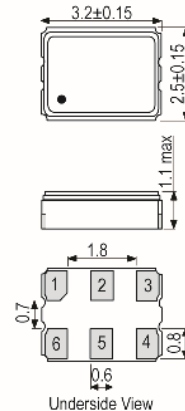
- Phase Jitter (12kHz to 20MHz): 300fs rms max
- Phase Jitter (12kHz to 20MHz):  
@100MHz: 155fs rms typ  
@125MHz: 132fs rms typ  
@156.25MHz: 106fs rms typ

**Environmental Parameters**


- Storage Temperature Range: -55 to 125°C
- Shock: 1500G, 0.5ms, 3 times for each surface, total 18 times.
- Vibration: Freq. range: 20~2000Hz, peak to peak amplitude: 1.52mm, peak acceleration: 20G (196m/s<sup>2</sup>), 3 direction(X, Y,Z), each cycle: 20min, 4 cycles for each direction.

**Manufacturing Details**

- RoHS Terminations Au over Ni
- RoHS Reflow Temp 260°C max for 10sec mac


**Outline (mm)**


- Pad Connections
1. Standby Operation
  2. N/C
  3. GND
  4. Output +
  5. Output -
  6. +Vs

**Solder Pad Layout**

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

USA: +1.760 668 8935

 Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



**Customer Part:**

**Compliance**

- RoHS Status (2015/863/EU)      Compliant
- REACH Status                      Compliant
- MSL Rating (JDEC-STD-033):    Not Applicable

**Packaging Details**

- Pack Style: Reel      Tape & reel in accordance with EIA-481-D  
Pack Size: 3,000
- *Alternative packing option available*

---

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

USA: +1.760 668 8935

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)