

Ratings

Voltage: 300 V
 Temperature: -25 to 80 °C
 Flammability: VW-1

Conductor

Conductor count: 6
 Gauge: 22 AWG 0.34 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 mm x 17

Insulator

Material: PVC
 Color: green, blue, yellow, white, black, red
 Diameter: Ø 1.35 ± 0.10 mm
 Nominal thickness: 0.38 mm

Drain

Stranding: Ø 0.16 mm x 17, 22 AWG

Shield

Type: foil + braided
 Material: aluminum mylar, tinned copper strands
 Stranding: Ø 0.127 mm
 Coverage: 80% minimum

Outer jacket



Material: PVC, 80A
 Color: black
 Diameter: Ø 6.5 ± 0.30 mm
 Nominal thickness: 0.8 mm

Wire marking: E339579 UL AWM STYLE 2464 22 AWG 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

Tests

Voltage test: 300 V
 Spark test: 3.0 kV
 Max resistance at 20 °C: 59.4 ohm/km
 Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C / 1 hour, no observed degradation
 Deformation: 121 ± 1 °C / 1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C / 1 hour, no observed cracking
 Dielectric test: 2000 Vac for 1 minute without breakdown

Use: Internal wiring or external interconnection of electronic equipment.

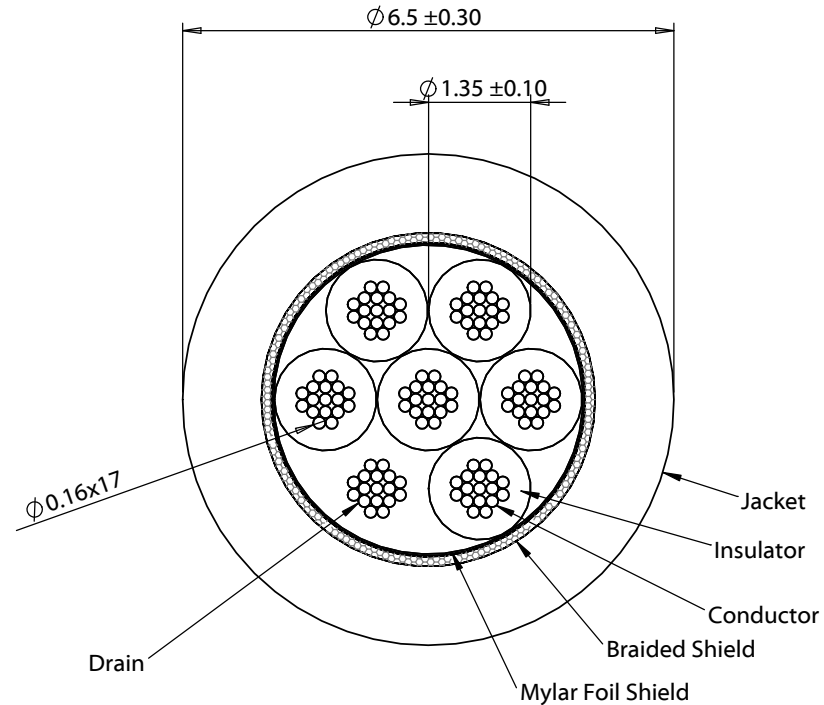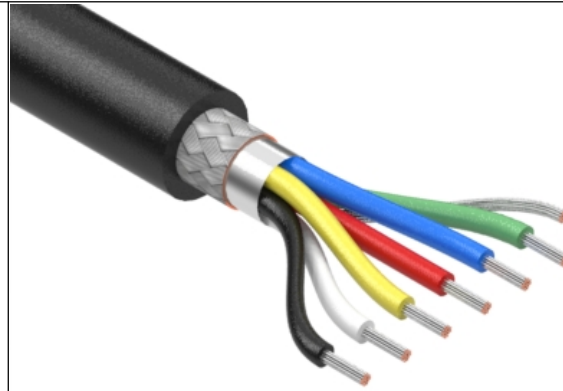

| Revision: | Date: | Description: |
|-----------|------------|-----------------|
| A | 04/05/2018 | Initial release |
| | | |
| | | |
| | | |

| |
|---|
| Prepared: RS <small>Digitally signed by RS Date: 2018.04.11 16:35:06 -07'00'</small> |
| Verified: AW <small>Digitally signed by AW Date: 2018.04.17 12:05:05 -07'00'</small> |
| Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm |

| |
|--|
| Notes: RoHS and REACH compliant |
| Function test: no open, no short circuit, no intermittent |
| Description: Wire, 6C TS, 22 AWG, UL2464, 300V, 80C, 6.5 mm, shielded, VW-1, PVC, black |

| | |
|---|---------------------------------|
| TENSILITY | |
| <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small> | |
| Size: A | Part number: 30-01053 |
| Scale: 10:1 | |
| Sheet 1 of 1 | |

5

4

3

2

1