


DESCRIPTION: MALE // DIP SOLDER // HIGH PROFILE

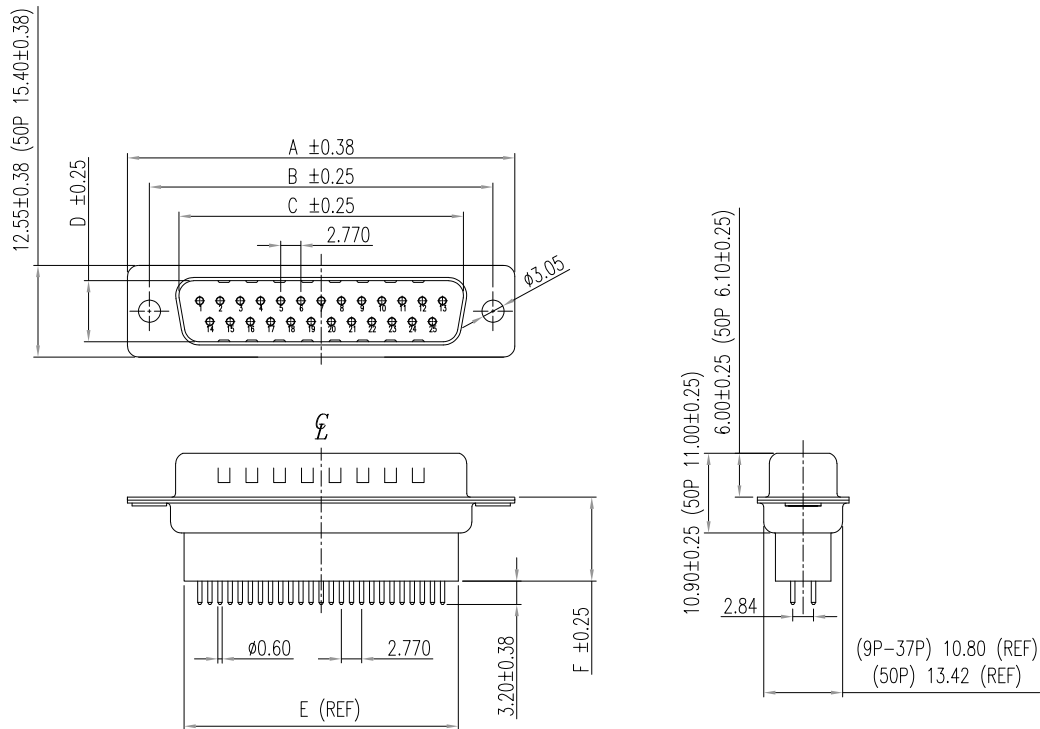


DIMENSIONS (mm)						
POSITIONS	A	B	C	D	E(REF)	F
9	30.81	24.99	16.92	8.36	15.45	11.35
15	39.19	33.32	25.25	8.36	24.50	11.37
25	53.04	47.04	38.96	8.36	37.83	11.37
37	69.32	63.50	55.42	8.36	54.45	11.40
50	67.00	61.10	52.80	11.26	51.65	11.40

MATERIAL:


SHELL: STEEL, NICKEL PLATED
 INSULATOR: UL 94V-O RATED, PBT-BLACK
 PROCESS TEMP: 230°C
 CONTACTS: BRASS - GOLD PLATED
 HARDWARE: NICKEL PLATED BRASS

ELECTRICAL:

CURRENT RATING: 5 AMPS
 CONTACT RESISTANCE: 10 mOhms Max.
 INSULATION RESISTANCE: 5,000 MOhms min.
 WORKING VOLTAGE: 250VAC RMS
 OPERATING TEMPERATURE: -55°C TO 100°C

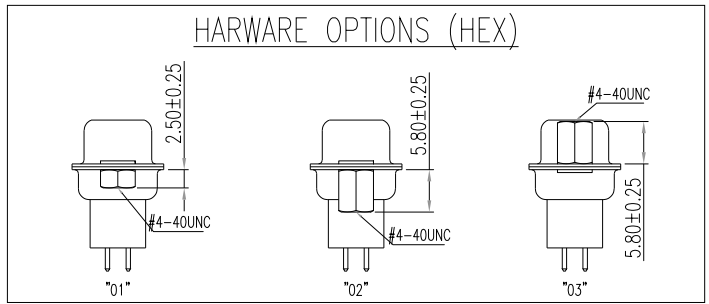

172-YYY-18YLYY1

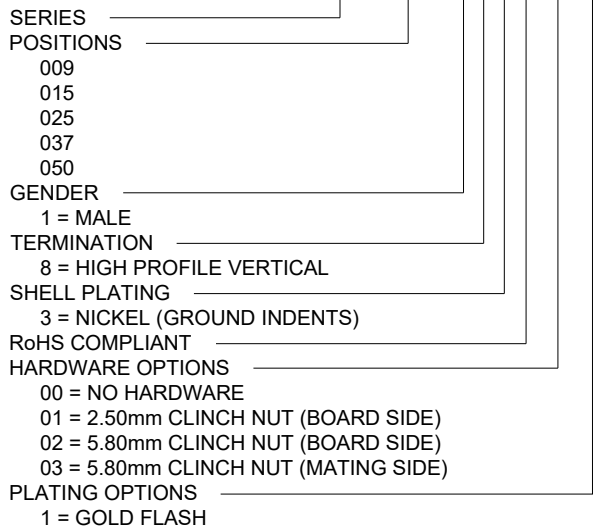

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.


DRAWN: W. ROBBINS
 DATE: 08/23/1998

NorComp


SCALE: NTS	SHEET 1 OF 2	REV 22
DWG NO. 172-YYY-18YLYY1		

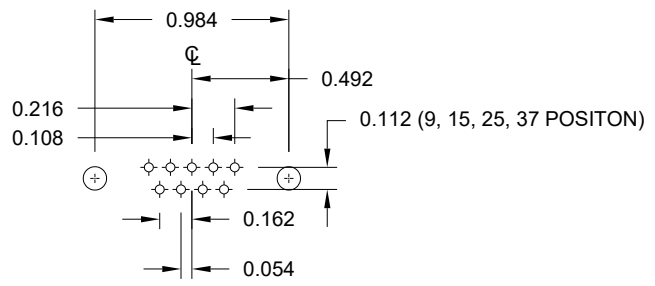


9 POSITION

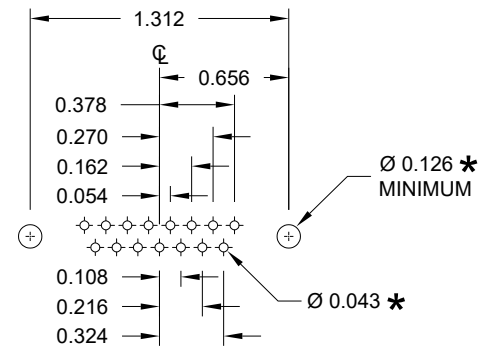


15 POSITION

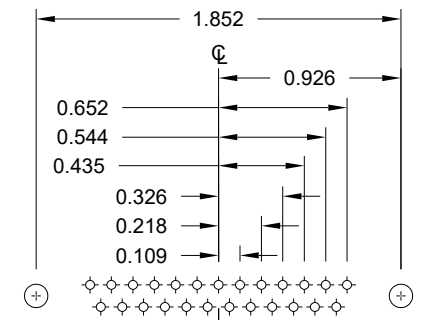

25 POSITION

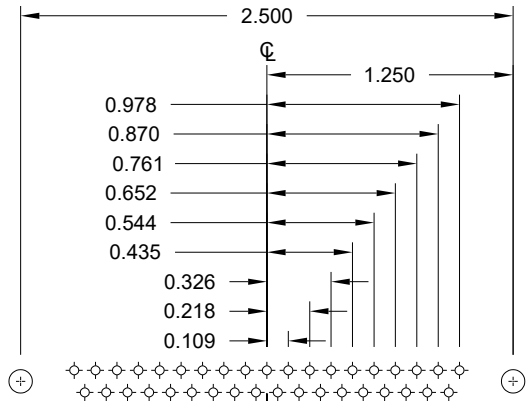

37 POSITION

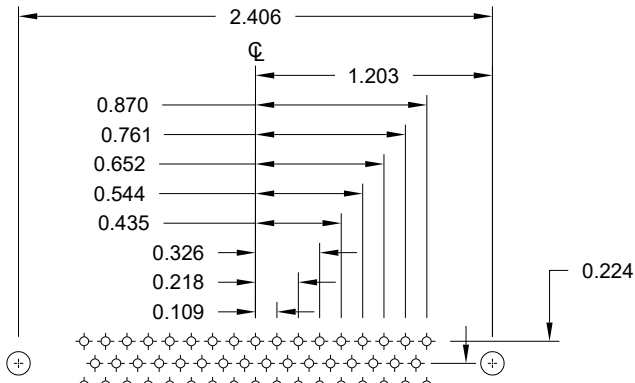

50 POSITION

HARDWARE MOUNTING HOLES
MAY NOT BE REQUIRED DEPENDING
ON MOUNTING METHOD TO PCB

* TYP.
SUGGESTED SIZE
MAY NOT BE SUITABLE FOR ALL APPLICATIONS

RoHS COMPLIANT

UNITS = inch

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
W. ROBBINS

DATE:
08/23/1998

NorComp

SCALE: NTS	SHEET 2	OF 2	REV 22
---------------	------------	---------	-----------

DWG NO. 172-YYY-18YLYY1