



NOTES:

1. MATERIALS AND FINISHES:  
MMCX STR PLUG - BRASS, GOLD PLATING  
CABLE - RG 174
2. ELECTRICAL:  
A. IMPEDANCE: 50 OHM
3. PACKAGING:  
A. QUANTITY: SINGLE PACK  
B. MARKING: BAG TO BE MARKED  
"AMPHENOL RF, 95-900-548-XXX AND DATE CODE"

REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
A	RELEASE TO MFG.	09-JUN-21	15736	DSK



SCALE 0.800

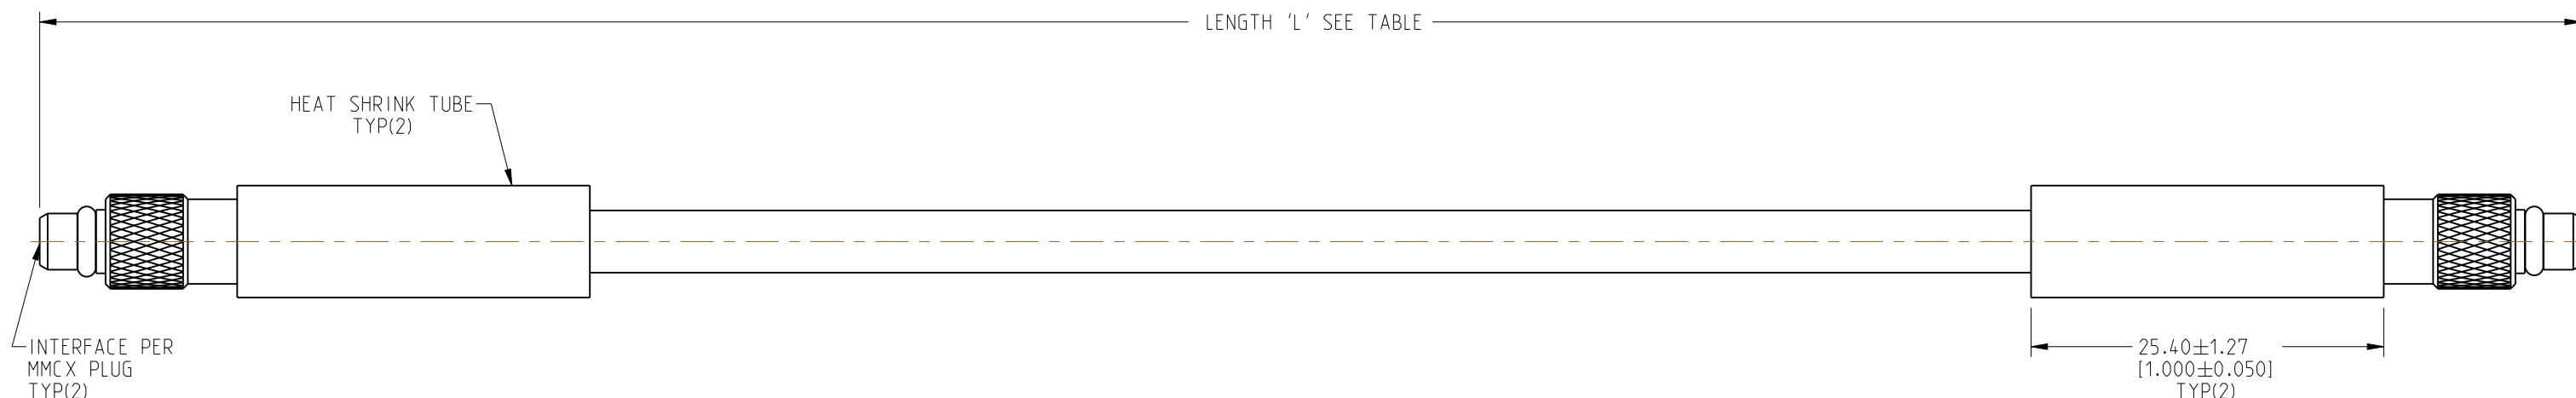

LENGTH TABLE		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES (METERS)
95-900-548-006	-	6.00 [0.152]
-	95-900-548M025	9.84 [0.250]
95-900-548-012	-	12.00 [0.305]
95-900-548-018	-	18.00 [0.457]
-	95-900-548M050	19.69 [0.500]
95-900-548-024	-	24.00 [0.610]
-	95-900-548M075	29.53 [0.750]
95-900-548-036	-	36.00 [0.914]
-	95-900-548M100	39.37 [1.000]
95-900-548-048	-	48.00 [1.219]
-	95-900-548M200	78.74 [2.000]
-	95-900-548M300	118.11 [3.000]

TOLERANCE TABLE	
LENGTH IN INCHES/FT (METERS)	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> FREQUENCY: DC - 1 GHz | <input checked="" type="checkbox"/> CONTINUITY       |
| <input type="checkbox"/> VSWR: _____ 1 MAX.               | <input checked="" type="checkbox"/> HI-POT: 300 VRMS |
| <input type="checkbox"/> INS. LOSS: _____ dB MAX.         | <input type="checkbox"/> OTHER                       |

**CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

<p>NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.</p>		<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE:                  &lt;0.5mm = ±0.05mm [<math>&lt;0.020 = \pm 0.002</math>]                  &gt;0.5 - 6mm = ±0.1mm [<math>&gt;0.020 - 0.236 = \pm 0.004</math>]                  &gt;6.00 - 30mm = ±0.2mm [<math>&gt;0.236 - 1.181 = \pm 0.008</math>]                  &gt;30.00 - 120mm = ±0.3mm [<math>&gt;1.181 - 4.725 = \pm 0.012</math>]</p>		<p>MATERIAL SEE NOTES</p>		<p>TITLE MMCX STR PLUG TO MMCX STR PLUG USING RG 174 CABLE VARIOUS LENGTH</p>		<p><b>Amphenol RF</b></p>	
<p>THIRD ANGLE PROJ. </p>		<p>REFERENCE</p>		<p>ENGINEER SASI D</p>		<p>DATE 09-MAY-21</p>		<p>SHEET NO. 2 OF 2</p>	
<p>EAR# 10677</p>		<p>ANGLES = ±1°</p>		<p>SCALE: 2.2:1.0</p>		<p>SIZE B</p>		<p>DRAWING NO. 95-900-548-XXX ITEM NO. 95-900-548-XXX PART NO. 95-900-548-XXX</p>	
								<p>REV A</p>	