



- Intel® Core™2 Duo processor
- High-performance video
- Gigabit Ethernet
- DDR3 RAM (up to 4 GB)
- USB 2.0 (4 ports)
- Serial I/O (1 port)
- Dual SATA interface
- HD audio support
- MiniBlade™ flash socket
- Extended temp. version
- MIL-STD-202G shock/vibe
- SPX™ I/O expansion

Highlights

PCI-104 Form Factor

Industry standard expandable, compact, highly rugged format.

Intel Core 2 Duo Processor

Up to 2.26 GHz performance.

High-performance Video

3D video acceleration (Gen 5.0). Analog and LVDS flat panel outputs.

Network Support

Gigabit Ethernet with remote boot support.

System RAM

Up to 4 GB DDR3 RAM for system flexibility.

USB I/O

Four USB 2.0 ports support keyboard, mouse, and other devices.

Device I/O

Serial port, dual SATA interface, and HD audio support.

Flash Memory

MiniBlade socket for high-reliability flash storage.

Extended Temperature Version

-40° to +85°C operation for harsh environments.

MIL-STD-202G

Qualified for high shock/vibration environments.

SPX Expansion

Supports expansion with versatile SPX add-on I/O modules.

Overview

The Wildcat is an embedded single board computer (SBC) featuring an Intel 2nd generation Core 2 Duo processor. Based on the PCI-104 industry standard form factor, the Wildcat supports the PCI stackable expansion bus on a 4.21" by 3.78" footprint. With its combination of ultra-high performance (up to 2.26 GHz), mid-range power consumption (19.5W typ.), ruggedness, and compact size, the Wildcat is an ideal embedded computer solution for medical, security, defense, transportation, and industrial markets. Potential applications include flight navigation, guidance systems, and evolving applications that rely on fast on-board processing of large amounts of data.

Like all VersaLogic products, the Wildcat is designed to support OEM applications where high reliability and long-term availability are required. From application design-in support, to its 5+ year production life guarantee, the Wildcat supports serious embedded applications. The Wildcat is fully RoHS compliant. Customization is available, even in low OEM quantities.

Details


Driven by a 2nd generation Intel Core 2 Duo processor designed specifically for embedded applications, the Wildcat runs up to 2.26 GHz. Enhanced Intel SpeedStep® technology provides dynamic processor frequency scaling to meet instantaneous performance needs while minimizing power draw and heat dissipation. This allows users to fine-tune the balance of power conservation and performance to suit their application needs.

Intel's GS45 + ICH9M chipset offers graphics core speeds up to 533 MHz for high-end graphics, advanced 3D rendering, high-definition video playback, and media acceleration for video CODECs. Analog VGA and LVDS flat panel video interfaces support flexible display configurations including Extended Desktop, Clone, and Twin display modes.

Wildcat's standard on-board features include gigabit Ethernet, an SO-DIMM socket for up to 4 GB DDR3 RAM, four USB 2.0 ports, one serial port, dual SATA interface, support for HD audio, and a MiniBlade socket for removable flash storage. Support for keyboard, mouse, and other devices is provided via USB. VersaLogic's SPX expansion interface creates additional access to cost-effective plug-in I/O solutions.

Available in both standard (0° to +60°C) and extended (-40° to +85°C) temperature versions; the Wildcat meets MIL-STD-202G specifications for shock and vibration. The Wildcat features transient voltage suppression (TVS) devices on many external connections for enhanced electrostatic discharge (ESD) protection in the field.

The Wildcat includes an embedded BIOS with OEM enhancements from Phoenix Technologies. The field-reprogrammable BIOS supports custom defaults and the addition of firmware applications for security processes, remote booting, and other pre-OS software functions. The Wildcat is compatible with a variety of popular operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX.

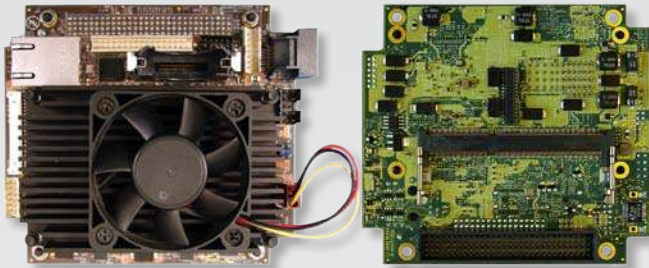

VL-EPMp-34S (Top)

VL-EPMp-34S (Bottom)

Ordering Information

Model	Speed	Operating Temp.	Conformal Coating
VL-EPMp-34S	2.26 GHz	0° to +60°C	None
VL-EPMp-34SR*	2.26 GHz	0° to +60°C	Urethane
VL-EPMp-34E	1.2 GHz	-40° to +85°C	None
VL-EPMp-34ER*	1.2 GHz	-40° to +85°C	Urethane

* Special order

Accessories

Wildcat Cable Kit (VL-CKR-WILD)	
VL-CBR-0401	6.25" ATX to SATA power adapter cable
VL-CBR-0701	19.75" SATA cable
VL-CBR-1008	ATX to 10-pin power cable
VL-CBR-1201	12-pin 2 mm latching / 15-pin VGA adapter cable
VL-CBR-3406	I/O cable set and paddleboard
VL-HDW-105	0.6" standoff package (metric thread)

Accessories	
VL-CBR-1401	Cable assembly for (2) SPX modules
VL-CBR-1402	Cable assembly for (4) SPX modules
VL-CBR-2010	20" 18-bit LVDS flat panel cable (Hirose)
VL-CBR-2011	20" 18-bit LVDS flat panel cable (JAE)
VL-CBR-2012	20" 24-bit LVDS flat panel cable (Hirose)
VL-CBR-2014	LVDS to VGA adapter board
VL-CFA-2A	CompactFlash adapter (SATA)
VL-ENCL-5x	Development enclosure
VL-F23-xxxx	MiniBlade module (USB)
VL-HDS35-320	320 GB 3.5" SATA hard drive
VL-HDW-106	0.6" standoff package (English thread)
VL-HDW-203	PC/104 extractor tool, metal
VL-MM7-xxxx	DDR3 SDRAM module
VL-SPX-x	SPX expansion modules

Data represents standard operation at +25°C with +5V supply unless otherwise noted. Specifications are subject to change without notification. Intel, Intel Core, and SpeedStep are trademarks of Intel Corp. MiniBlade is a trademark of the SFF-SIG. SPX is a trademark of VersaLogic Corp. All other trademarks are the property of their respective owners.

02/21/13

SPECIFICATIONS

General	Board Size	PCI-104 compliant: 107 mm x 96 mm (4.21" x 3.78")			
	Processor	Intel Core 2 Duo (SP9300). Up to 1066 MHz FSB. 6 MB L2 cache. Temperature protected.			
	Chipset	GS45 + ICH9M			
	Power Requirements	+5V running Windows XP with 1 GB RAM, Ethernet, keyboard, and mouse:			
		Model	Idle	Typical	Max
		VL-EPMp-34S/R	2.4A (12W)	3.9A (19.5W)	5.4A (27W)
		VL-EPMp-34E/R	1.8A (9W)	2.6A (12.8W)	3.3A (16.5W)
	System Reset & Hardware Monitors	Watchdog timeout. V _{CC} sensing (resets below 4.7V typ.).			
Stackable Bus	PCI: 3.3V signaling, +5V tolerant				
Other I/O Expansion	VersaLogic SPX interface				
RoHS	Compliant				
Environmental	Operating Temperature	Model	Operating Temperature		
		VL-EPMp-34S/R	0° to +60°C		
		VL-EPMp-34E/R	-40° to +85°C		
	Storage Temperature	-40° to +85°C			
	Airflow Requirements	Free air from -40° to +85°C			
	Thermal Shock	5°C/min. over operating temperature			
	Humidity	Less than 95%, noncondensing			
	Vibration, Sinusoidal Sweep	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 minutes per axis			
Vibration, Random	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 minutes per axis				
Mechanical Shock	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis				
Memory	System RAM	One SO-DIMM socket. Up to 4 GB DDR3 SDRAM.			
Video	General	Integrated high-performance video. Intel GMA 4500 MHD graphics core. Analog and flat panel video interfaces support Extended Desktop, Clone, and Twin display modes. Optional video adapter card converts LVDS output to VGA for dual VGA operation.			
	VRAM	Up to 512 MB shared DRAM			
	Desktop Display Interface*	Standard analog output (VGA)			
	OEM Flat Panel Interface	18/24-bit LVDS interface. CMOS-selectable TFT panel types.			
Mass Storage	Hard Drive	Dual SATA interface (Revision 2.0)			
	Flash	One MiniBlade socket (USB signaling)			
Network Interface	Ethernet*	One autodetect 10BaseT/100BaseTX/1000BaseT port			
	Network Boot Option	Intel boot agent (downloadable) supports PXE protocol. Argon Managed Boot Agent (optional with royalty fee) supports PXE, RPL, NetWare, TCP/IP (DHCP, BOOTP) remote boot protocols.			
Device I/O	USB*‡	Four USB 2.0/1.1 ports			
	Serial*	One RS-232/422/485 selectable port. 16C550 compatible. 460 Kbps.			
	Audio‡	Digital HD audio via external codec			
Software	BIOS	Phoenix Technologies Embedded BIOS with OEM enhancements. Field reprogrammable. Support for USB keyboard/mouse and USB boot. User-configurable CMOS defaults.			
	Operating Systems	Compatible with most x86 operating systems, including Windows, Windows Embedded, Linux, VxWorks, and QNX			

* TVS protected port (enhanced ESD protection)

‡ Power pins on this port are overload protected