
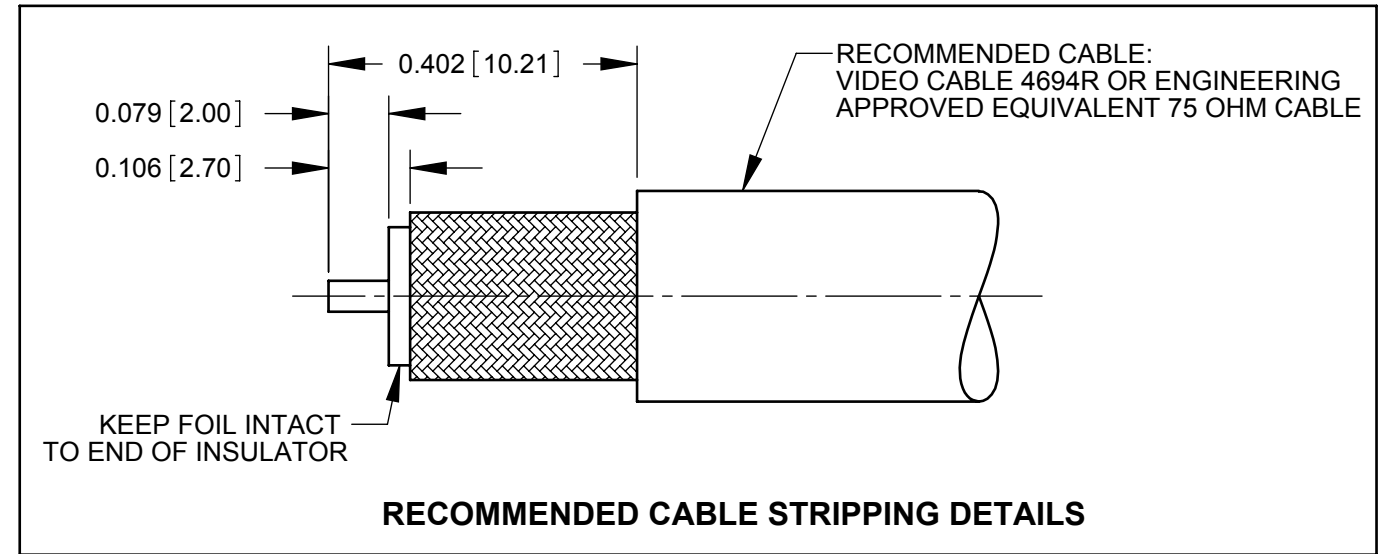


DIMENSIONS SHOWN FOR REFERENCE ONLY

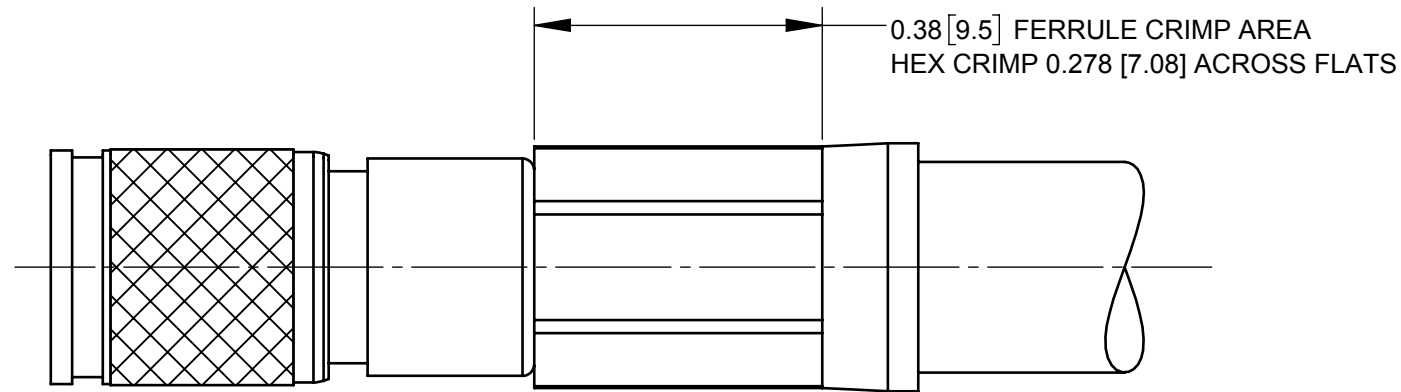

NOTES:

1. MEETS SMPTE 2082-1
CHARACTERISTIC IMPEDANCE: 75 OHMS
CONTACT RESISTANCE: 50 MILLIOHMS MAX.
2. MATERIAL:
BODY: COPPER ALLOY, NICKEL PLATED.
CONTACT PIN: COPPER ALLOY, GOLD PLATED.
SPRING: BERYLLIUM COPPER, NICKEL PLATED.
TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.
INSULATOR: TEFLON
FERRULE: COPPER ALLOY, NICKEL PLATED.
3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
					SIZE	WIDTH	MULT	LBS/M	TEMPER
					UNLESS OTHERWISE SPECIFIED			MATERIAL SEE NOTES	
					1. ALL DIMENSIONS IN INCHES [mm]			SPEC No.	
					- TWO PLACE DECIMALS ±0.02 [0.5]			SCALE 4:1	
					- THREE PLACE DECIMALS ±0.005 [0.13]			FIRST USED ON	
A	28195	08/29/19	PC	TJK	DATE DRAWN	BY	CHKD	APVD	Switchcraft [®]
REV	ECO NUMBER	DATE	BY	APVD	04/05/17	PNK	04/05/17	04/05/17	
REVISIONS					DO NOT SCALE DRAWING				
					NAME			PART No.	
					UHD DIN 1.0/2.3 PLUG			UHDDIN94	
					75 OHMS, 4694R, RoHS			REV A	