


OPTION A


- NOTES:
 1. MATERIAL:
 HOUSING: POLYESTER(PBT), GLASS FILLED, UL94 V-0,
 COLOR: BLACK
 TERMINAL: PHOSPHOR BRONZE
 2. FINISH:
 30 GOLD: 0.76 MICROMETERS/30 MICROINCHES MINIMUM GOLD IN
 1.91 MICROMETERS/75 MICROINCHES MINIMUM TIN
 OVER NICKEL UNDERPLATE OVERALL
 3. TO BE USED WITH 22 AWG STRANDED WIRE WITH (1.35)/.053
 DIAMETER MAXIMUM INSULATION
 4. SEE TABLE FOR AVAILABLE CIRCUIT SIZES
 5. STANDARD PACKAGING PER PK-70873-0001. OPTIONAL PACKAGING
 MAY BE AVAILABLE, REQUEST DRAWING PK-70400
 6. PARTS STACKABLE END TO END ON (2.54)/.100 CENTERS
 7. PRODUCT SPECIFICATION: PS-70400
 8. SEE DRAWING SDA-70400-**** (SHEET 3) FOR OPTIONAL
 HOUSING DETAILS
 9. 4 CIRCUIT SHOWN
 10. TO MATE WITH MOLEX 2.54/.100 CENTERLINE HEADERS
 11. 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS



CIRCUIT NO. 1
 SLOT OR ARROW

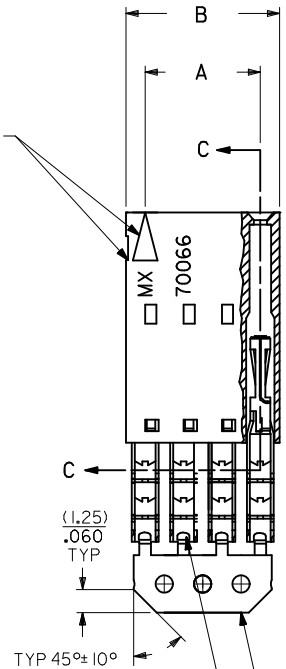

SECTION C-C

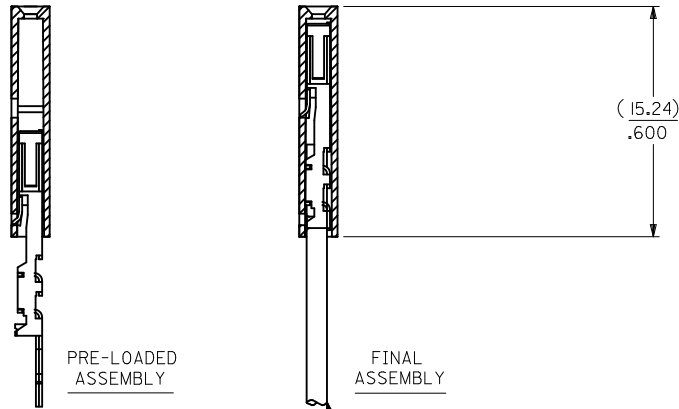

CKT. SIZE	A	B	EDP. NO.
2	(2.54) .100	(5.05) .199	14-56-7029
3	(5.08) .200	(7.59) .299	14-56-7039
4	(7.62) .300	(10.13) .399	14-56-7049
5	(10.16) .400	(12.67) .499	14-56-7059
6	(12.70) .500	(15.21) .599	14-56-7069
7	(15.24) .600	(17.75) .699	14-56-7079
8	(17.78) .700	(20.29) .799	14-56-7089
9	(20.32) .800	(22.83) .899	14-56-7099
10	(22.86) .900	(25.37) .999	14-56-7109
11	(25.40) 1.000	(27.91) 1.099	14-56-7119
12	(27.94) 1.100	(30.45) 1.199	14-56-7129
13	(30.48) 1.200	(32.99) 1.299	14-56-7139
14	(33.02) 1.300	(35.53) 1.399	14-56-7149
15	(35.56) 1.400	(38.07) 1.499	14-56-7159
16	(38.10) 1.500	(40.61) 1.599	14-56-7169
17	(40.64) 1.600	(43.15) 1.699	14-56-7179
18	(43.18) 1.700	(45.69) 1.799	14-56-7189
19	(45.72) 1.800	(48.23) 1.899	14-56-7199
20	(48.26) 1.900	(50.77) 1.999	14-56-7209
21	(50.80) 2.000	(53.31) 2.099	14-56-7219
22	(53.34) 2.100	(55.85) 2.199	14-56-7229
23	(55.88) 2.200	(58.39) 2.299	14-56-7239
24	(58.42) 2.300	(60.93) 2.399	14-56-7249
25	(60.96) 2.400	(63.47) 2.499	14-56-7259

I.D. SLOT CODE TO WIRE GAUGE CHART	
I.D. SLOT CODE	WIRE GAUGE
D	22 AWG.

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
30 GOLD	RED

REMOVE ENG NO. EC NO: UCP2011-110 2010/10/19 DRW:MSI BARRA CHKD:J MORGAN 2010/10/19 APPR:SMILLER 2010/11/24	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± ---		DRAWN BY DATE MSI BARRA 2010/10/20		TITLE ASSEMBLY, SL CONNECTOR SINGLE ROW 2.54/.100 GRID			
		ANGULAR ± 1/2°		CHECKED BY DATE WAZ 1987/10/26		MOLEX MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE SMILLER 2010/11/24		MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70400-3350-3373	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


OPTION A

NOTES:

1. MATERIAL:
HOUSING: POLYESTER(PBT), GLASS FILLED, UL94 V-0,
COLOR: BLACK
TERMINAL: PHOSPHOR BRONZE
2. FINISH:
30 GOLD: 0.76 MICROMETERS/30 MICROINCHES MINIMUM GOLD IN
1.91 MICROMETERS/75 MICROINCHES MINIMUM TIN
OVER NICKEL UNDERPLATE OVERALL
3. TO BE USED WITH 22 AWG STRANDED WIRE WITH (1.35)/.053
DIAMETER MAXIMUM INSULATION
4. SEE TABLE FOR AVAILABLE CIRCUIT SIZES
5. STANDARD PACKAGING PER PK-70873-0001. OPTIONAL PACKAGING
MAY BE AVAILABLE, REQUEST DRAWING PK-70400
6. PARTS STACKABLE END TO END ON (2.54)/.100 CENTERS
7. PRODUCT SPECIFICATION: PS-70400
8. SEE DRAWING SDA-70400-**** (SHEET 3) FOR OPTIONAL
HOUSING DETAILS
9. 4 CIRCUIT SHOWN
10. TO MATE WITH MOLEX 2.54/.100 CENTERLINE HEADERS
11. 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS




CIRCUIT NO. 1
SLOT OR ARROW

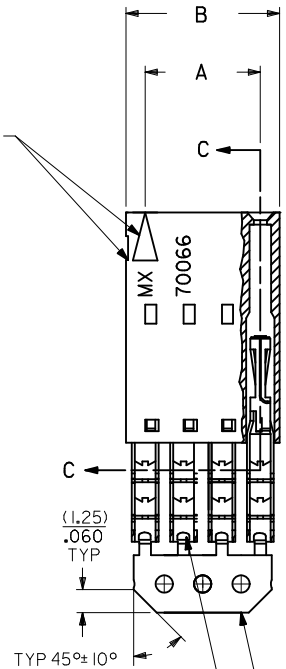

SECTION C-C



PRE-LOADED ASSEMBLY

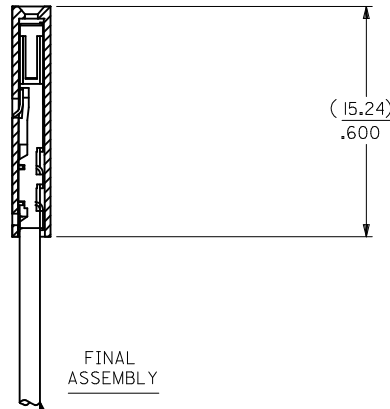

FINAL ASSEMBLY

CKT. SIZE	A	B	EDP. NO.
2	(2.54) .100	(5.05) .199	14-56-7029
3	(5.08) .200	(7.59) .299	14-56-7039
4	(7.62) .300	(10.13) .399	14-56-7049
5	(10.16) .400	(12.67) .499	14-56-7059
6	(12.70) .500	(15.21) .599	14-56-7069
7	(15.24) .600	(17.75) .699	14-56-7079
8	(17.78) .700	(20.29) .799	14-56-7089
9	(20.32) .800	(22.83) .899	14-56-7099
10	(22.86) .900	(25.37) .999	14-56-7109
11	(25.40) 1.000	(27.91) 1.099	14-56-7119
12	(27.94) 1.100	(30.45) 1.199	14-56-7129
13	(30.48) 1.200	(32.99) 1.299	14-56-7139
14	(33.02) 1.300	(35.53) 1.399	14-56-7149
15	(35.56) 1.400	(38.07) 1.499	14-56-7159
16	(38.10) 1.500	(40.61) 1.599	14-56-7169
17	(40.64) 1.600	(43.15) 1.699	14-56-7179
18	(43.18) 1.700	(45.69) 1.799	14-56-7189
19	(45.72) 1.800	(48.23) 1.899	14-56-7199
20	(48.26) 1.900	(50.77) 1.999	14-56-7209
21	(50.80) 2.000	(53.31) 2.099	14-56-7219
22	(53.34) 2.100	(55.85) 2.199	14-56-7229
23	(55.88) 2.200	(58.39) 2.299	14-56-7239
24	(58.42) 2.300	(60.93) 2.399	14-56-7249
25	(60.96) 2.400	(63.47) 2.499	14-56-7259

I.D. SLOT CODE TO WIRE GAUGE CHART	
I.D. SLOT CODE	WIRE GAUGE
D	22 AWG.

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
30 GOLD	RED

REMOVE ENG NO. EC NO: UCP2011-110 DRW:MSI BARRA 2010/10/19 CHKD:J MORGAN 2010/10/19 APPR:SMILLER 2010/11/24	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± ---		DRAWN BY DATE MSI BARRA 2010/10/20		TITLE ASSEMBLY, SL CONNECTOR SINGLE ROW 2.54/.100 GRID		MOLEX MOLEX INCORPORATED		
		ANGULAR ± 1/2°		CHECKED BY DATE WAZ 1987/10/26		APPROVED BY DATE SMILLER 2010/11/24				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		MATERIAL NO. SDA-70400-3350-3373		DOCUMENT NO.		SHEET NO. 1 OF 1