


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
H1		REVISED PER ECO-16-004223	20JUL2016	NK MZ

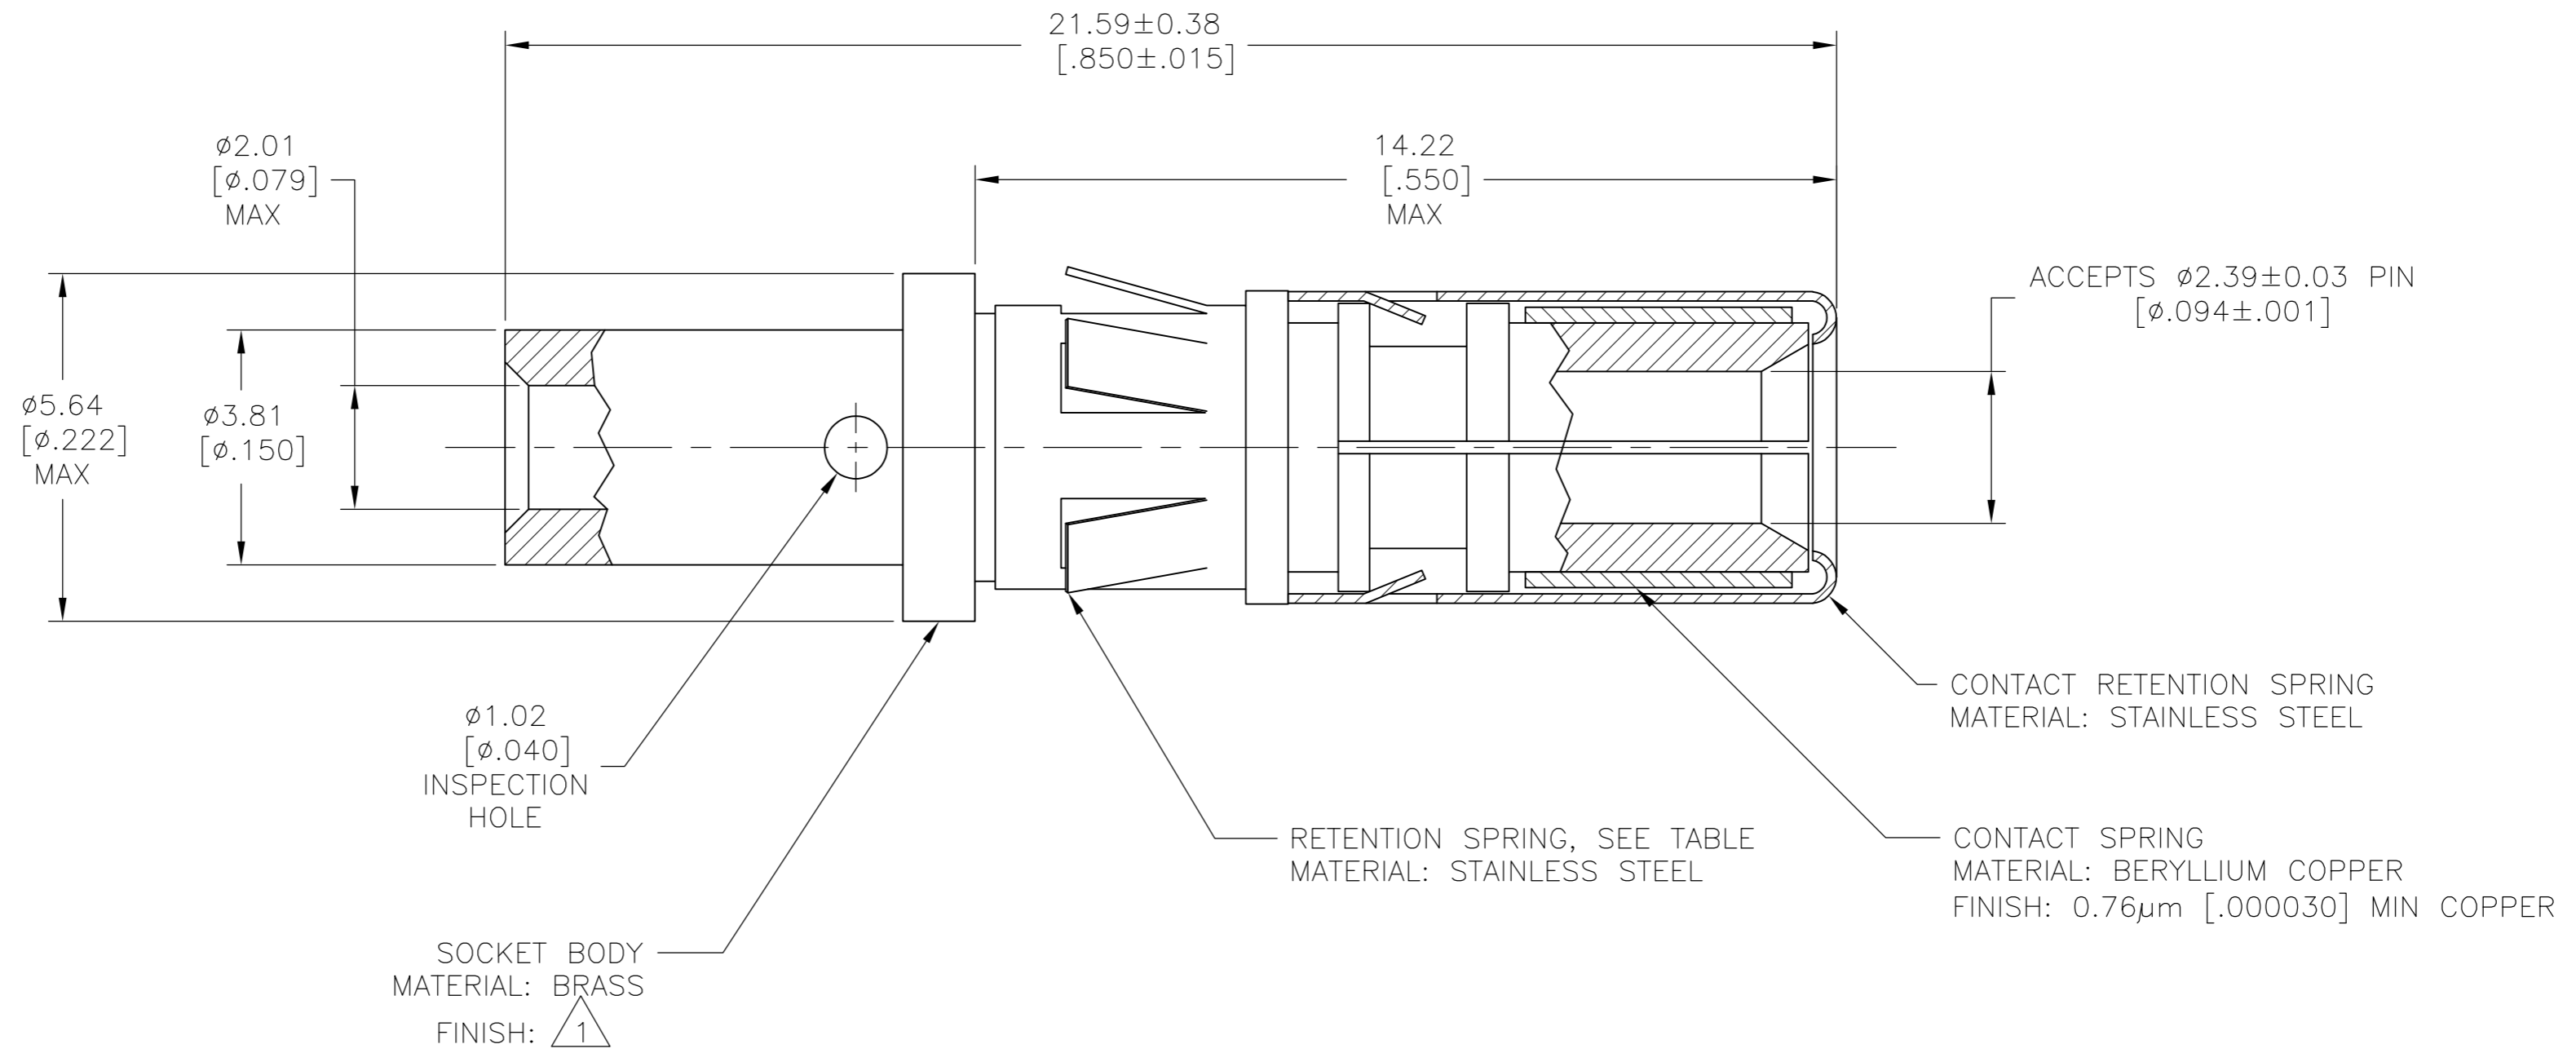

1 0.76µm [0.000030] MIN GOLD OVER 1.27µm [0.000050] MIN NICKEL.

2 ASSEMBLY MATES WITH PIN ASSEMBLY 202421.

OBSOLETE	NO	202418-3
	YES	202418-1
	RETENTION SPRING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.CARBO 30 DEC 97	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK R.STONE 09 JAN 98		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.STEINHAUER 30 JAN 98	NAME CONTACT ASSEMBLY, SOCKET, WIRE SIZE #16-#18, TYPE I	
0 PLC ± -		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC	A2 00779 C=202418	
2 PLC ± 0.13 [.005]		WEIGHT	SCALE 10:1 SHEET 1 OF 1 REV H1	
3 PLC ± -		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
FINISH SEE CALLOUTS				