




SL32C thru SL310C

## Surface Mount Schottky Barrier Rectifier

### FEATURES

- Ideal for automated placement
  - Low forward voltage drop
  - Low leakage current
  - Meets environmental standard MIL-S-19500D
  - Moisture sensitivity: level 1, per J-STD-020
  - Solder dip 275 °C, 10 s
  - Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- DO-214AB (SMC)



### TYPICAL APPLICATIONS

For use in general purpose rectification of lighting, power supplies, inverters, converters and freewheeling diodes for consumer, automotive and telecommunication.

PRIMARY CHARACTERISTICS	
I <sub>F(AV)</sub>	3 A
V <sub>RRM</sub>	20 V to 100 V
I <sub>FSM</sub>	80A
V <sub>F</sub>	0.42V, 0.5V, 0.75V
T <sub>J</sub> max.	125 °C , 150 °C, 175 °C

### MECHANICAL DATA

**Case:** DO-214AB, molded epoxy body, Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22B-106

**Polarity:** Laser Band Denotes Cathode Band

### MAXIMUM RATINGS (T<sub>A</sub> = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SL32C	SL33C	SL34C	SL35C	SL36C	SL37C	SL38C	SL39C	SL310C	UNIT
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	70	80	90	100	V
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	49	56	63	70	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	70	80	90	100	V
Maximum average forward rectified current at TL(See Fig.1)	I <sub>F(AV)</sub>	3								A	
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	80								A	
Operating junction temperature range	T <sub>J</sub>	- 55 to + 125			- 55 to + 150			°C			
Storage temperature range	T <sub>STG</sub>	- 55 to + 150								°C	

**ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)**

PARAMETER	TEST CONDITIONS	SYMBOL	SL32C	SL33C	SL34C	SL35C	SL36C	SL37C	SL38C	SL39C	SL310C	UNIT
Maximum instantaneous forward voltage	IF=3 A	V <sub>F</sub>		0.42		0.5		0.75				V
Maximum DC reverse current at rated DC blocking voltage	TA=25°C	I <sub>R</sub>			0.2			0.05				mA
	TA=100°C				50			4				
Typical junction capacitance	4.0 V, 1 MHz	C <sub>J</sub>				220						pF

**THERMAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)**

PARAMETER	SYMBOL	SL32C	SL33C	SL34C	SL35C	SL36C	SL37C	SL38C	SL39C	SL310C	UNIT
Maximum thermal resistance	R <sub>θJA</sub> (1)			52				75			°C/W
	R <sub>θJT</sub> (2)			17				25			

Notes: (1) Thermal resistance from junction to ambient, 0.315×0.315" (8.0×8.0mm) copper pads to each terminal  
(2) Thermal resistance from junction to terminal, 0.315×0.315" (8.0×8.0mm) copper pads to each terminal

### RATINGS AND CHARACTERISTICS CURVES (T<sub>A</sub> = 25 °C unless otherwise noted)

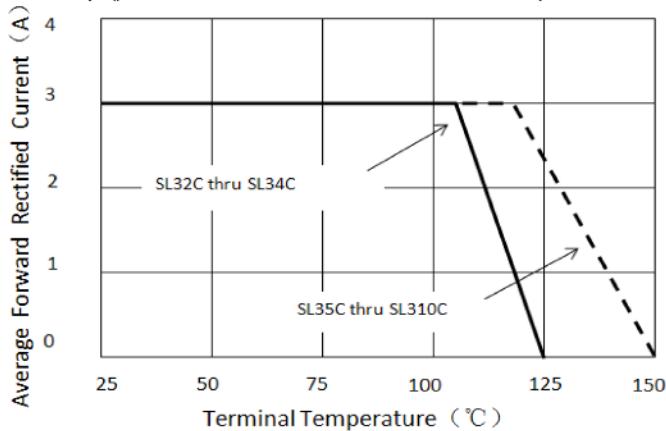


Figure 1. Forward Current Derating Curve



Figure 2. Maximum Non-repetitive Peak Forward Surge Current

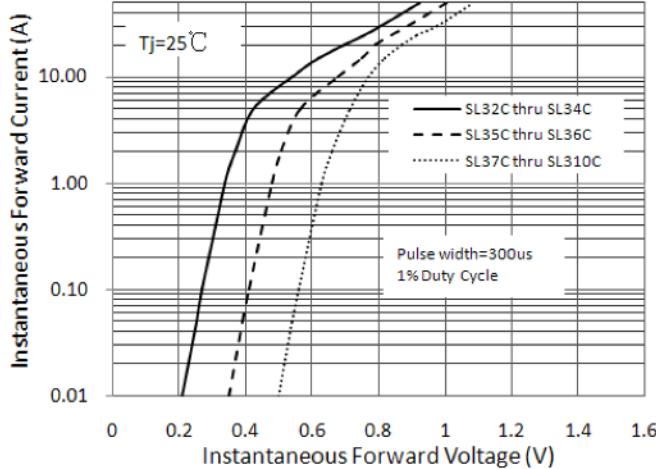


Figure 3. Typical Instantaneous Forward Characteristics

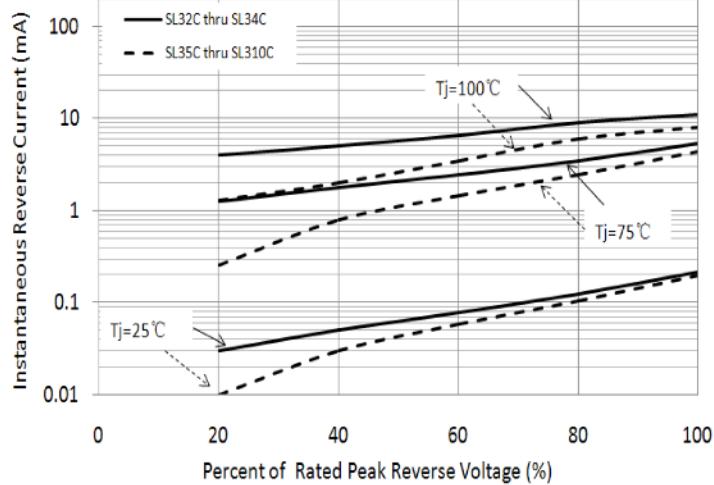


Figure 4. Typical Reverse Characteristics

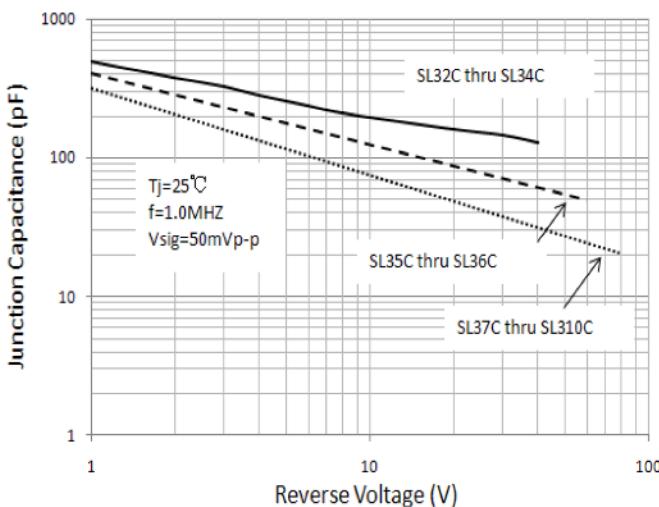


Figure 5. Typical Junction Capacitance

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

