CIOD I CIX, II IC.	BLK/MHT/GPN Approvals: III /CIII 2515+50mm GlobTek Black	
	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 361M1048F27032(R)	Rev A
Fax (201) 784-0111		

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

CIOD I CIX, IIIO.	BLK/MHT/GPN Approvals: III /CLII 2515+50mm GlohTek Black	
	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 361M1048F27032(R)	Rev A
Fax (201) 784-0111		

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
Α	Initial release	QA	11/10/2021	QA


Cordset Information:

CordsetColor:GlobTek Black Cord Length (mm):2515±50


NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)

CIOD I CIX, IIIO.	BLK/MHT/GPN Approvals: III /CLII 2515+50mm GlohTek Black	
	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 361M1048F27032(R)	Rev A
Fax (201) 784-0111		

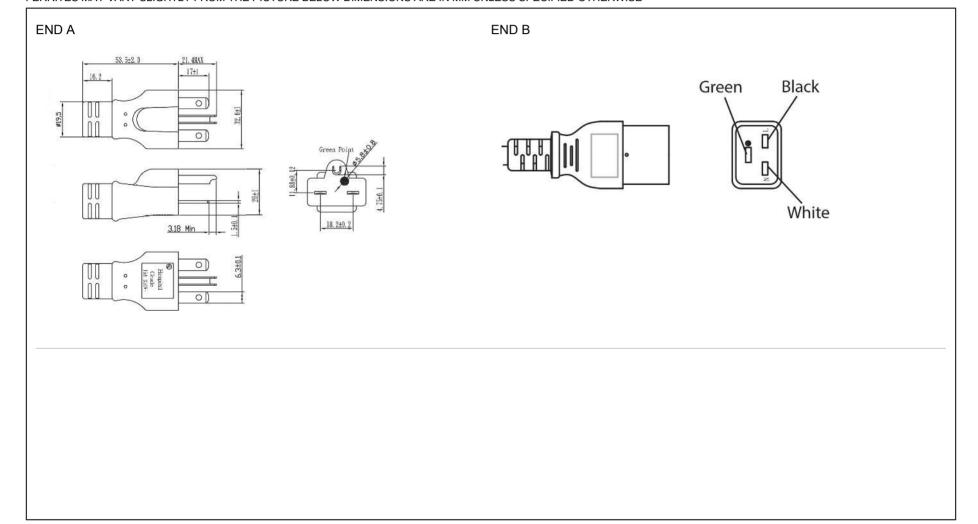

CIOD I CK, IIIC.	Drawing Title: HOSPITAL GRADE NEMA 6-15P 2 PRONGS + GROUND PRONG to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, BLK/WHT/GRN, Approvals: UL/CUL, 2515±50mm, GlobTek Black	SJT, 105 Deg.C, 300V,
	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 361M1048F27032(R)	Rev A
Fax (201) 784-0111		

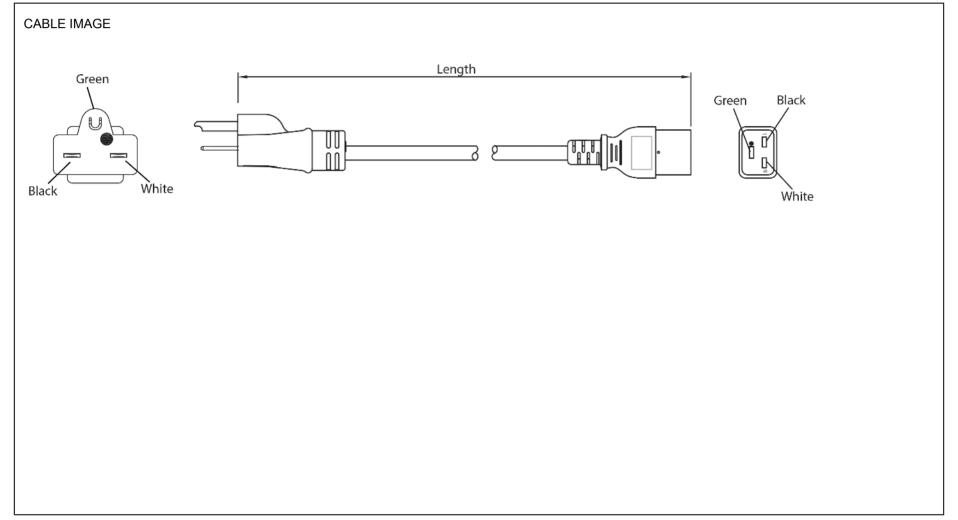

GIOD I CIK, II IC.	RIK/WHT/GRN Approvals: III /CIII 2515+50mm GlobTek Black	
	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 361M1048F27032(R)	Rev A
Fax (201) 784-0111		

End A	Cable	End B
Code:361M	Code:104	Code:7032UL1
Description:HOSPITAL GRADE NEMA 6-15P 2 PRONGS +	Description:GT Cable #104: 14 / 3 Conductors, 9.3mm OD,	Description:NORTH AMERICAN IEC60320-C19
GROUND PRONG	SJT, 105 Deg.C, 300V, BLK/WHT/GRN, Approvals: UL/CUL	CONNECTOR
Rating (V):250	Color:GlobTek Black	Rating (V):250
Rating (A):15.0	Wire Gauge(AWG):14	Rating (A):20.0
Gender:Male	Cond:3	Gender:Female
Overmolded:Yes	Type:SJT	Overmolded:Yes
	Temperature:105° C	
	Amps:15	
	Volts:300	
	OD:9.3	
	ConductorsColors:BLK/WHT/GRN	
Overall cable rating:250V 15A		

Connector Approvals Plug Approvals Cable Approvals UL/CUL Note: North American power cords are certified as UL UL 817 Note: North American power cords are certified as UL assemblies of UL rated parts, so, the combination of UL CSALINK TO CERT assemblies of UL rated parts, so, the combination of UL CSA certified plugs, connectors, andf cables total up to a UL or certified plugs, connectors, andf cables total up to a UL approved cordset or cable assembly CUL approved cordset or cable assembly CUL LINK TO CERTS LINK TO CERTs Link to live Power Cords listing @ UL Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL Link to live Flexible Cord listing @ UL AGENCY ONLINE DOCUMENTS http://en.globtek.com/cordsets/

PROPRIETARY INFORMATION

CIOD I CK, IIIC.	Drawing Title: HOSPITAL GRADE NEMA 6-15P 2 PRONGS + GROUND PRONG to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, SJT, 105 Deg.C, 300V, BLK/WHT/GRN, Approvals: UL/CUL, 2515±50mm, GlobTek Black	
•	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 361M1048F27032(R)	Rev A
Fax (201) 784-0111		

RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000005JwR0AAK	
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf	
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf	
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf	
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t3a000005JwR0	
IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.		

GIOD I CIX, II IC.	Drawing Title: HOSPITAL GRADE NEMA 6-15P 2 PRONGS + GROUND PRONG to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, 8 BLK/WHT/GRN, Approvals: UL/CUL, 2515±50mm, GlobTek Black	SJT, 105 Deg.C, 300V,
186 Veterans Drive,	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 361M1048F27032(R)	Rev A
Fax (201) 784-0111		

Hanking:360M-7032 Description:250±30 mm Image: 250±30 Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):