**Ratings**
Voltage: 300 V
Temperature
Static: -40 to 105 °C
Dynamic: -20 to 105 °C
Flammability: VW-1
Water resistant: 75 °C
Oil resistant: 60 °C (jacket)
≥50% elongation and tensile strength after aging
UV resistance: jacket, 720 hours xenon or carbon arc exposure
≥80% tensile strength and elongation after aging

**Conductor**
Conductor count: 8
Gauge: 18 AWG 0.82 mm²
Material: tinned copper strands
Strand size: Ø 0.16 mm x 41
Resistance at 20 °C: 23.2 Ω /km Max

**Insulator**
Material: PVC
Color: red, black, white, yellow, blue, green, orange, purple
Diameter: ∅2.1 ±0.10 mm
Nominal thickness: 0.43 mm
Resistance at 20 °C: 10 MΩ /km Min

**Filler**
Material: cotton rope

**Drain**
Stranding: Ø 0.16 mm x 41
Material: tinned copper strands

**Shield**
Type: aluminum mylar + tinned copper braid
Coverage: 65% min braid, 100% foil
Braid stranding: Ø0.10 mm

**Outer jacket**
Material: PVC, 80A
Color: black
Diameter: ∅9.5 ±0.30 mm
Nominal thickness: 0.98 mm

**Wire marking**: E339579 UL AWM STYLE 20387 18 AWG 105°C 300V VW-1 60°C OIL RESISTANT UV RESISTANT TENSILITY

**Use:** External wiring

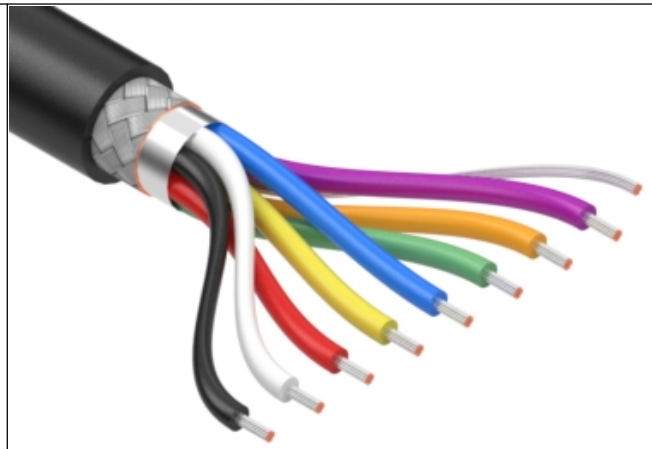

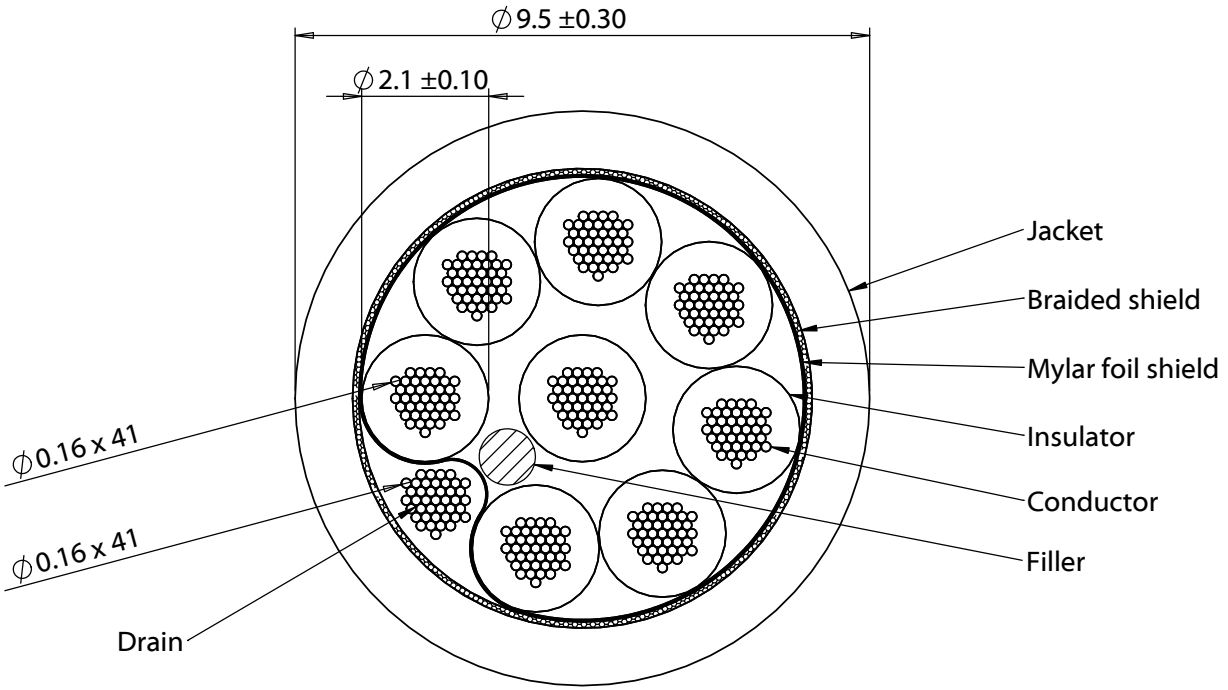


| Revision: | Date: | Description: |
|---|---|---|
| A | 8/25/2020 | Initial release |
| | | |
| | | |
| | | |
| | | |

Prepared: JC Digitally signed by JC Date: 2020.08.28 10:38:10 -07'00'

Verified: AW Digitally signed by AW Date: 2020.08.28 14:18:05 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Wire, 8C TS, 18 AWG, UL20387, 300V, 105C, 60C oil, UV, 9.5 mm, shielded, VW-1, PVC, 80A, black


TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com


Size: A

Part number: 30-01608

Scale: 8:1

Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1