

FSMJ Series *Micro Miniature Vertical Pushbuttons* with Tactile Feel & ESD Grounding Terminal

MATERIAL SPECIFICATIONS:

ContactsCopper alloy, silver plate
 Case.....Polyamide
 Actuator ButtonPolyacetal Resin
 FrameCopper alloy, tin plate
 TerminalsCopper alloy, silver plate

TYPICAL PERFORMANCE CHARACTERISTICS:

Contact Rating50 mA @ 12 VDC
 Initial Contact Resistance.....100 Milliohms max.
 Insulation Resistance100 Megohms min. @ 100 VDC
 Dielectric Strength250 VAC
 Actuation Force160 Grams AVG (STD.)
 Actuator Travel012" (0,3)
 Electrostatic Discharge
 w/ESD Ground Terminal5Kv w/no discharge
 Life Expectancy100,000 Cycles

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature.....-4°F to +158°F (-20°C to +70°C)
 Storage Temperature.....-22°F to +176°F (-30°C to +80°C)
 Solder Heat Resistance.....See Page M6

6 x 6 mm

D



FSM1J
WITH
ESD
TERMINAL

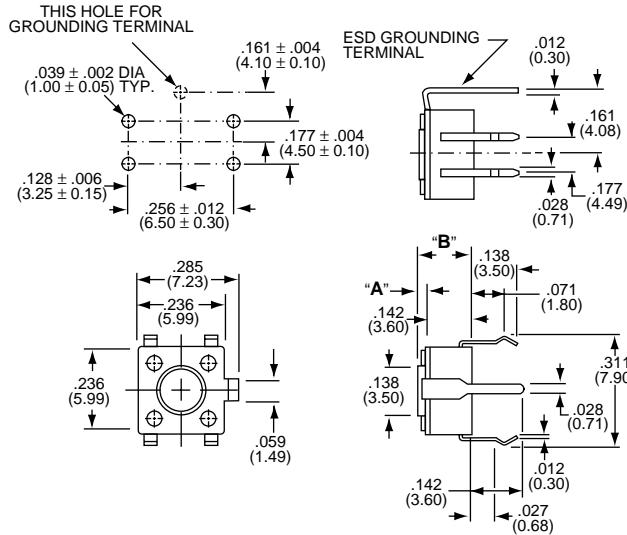


Part Number W/O ESD Terminal	Dim. A	Dim B	Button Color
FSM 1J	.028" (0,70)	.169" (4,30)	Black
FSM 3J	.055" (1,40)	.196" (5,00)	Black
FSM 5J	.134" (3,40)	.276" (7,00)	Blue
FSM 7J	.232" (5,90)	.374" (9,50)	Black
FSM 9J	.146" (3,70)	.287" (7,30)	Ivory
FSM 11J	.173" (4,40)	.315" (8,00)	White
FSM 13J	.370" (9,40)	.512" (13,00)	Black
FSM 15J	.527" (13,40)	.669" (17,00)	Black
FSM 17J	.193" (4,90)	.335" (8,51)	Black

6 x 6 mm



FSM2J
WITHOUT
ESD
TERMINAL

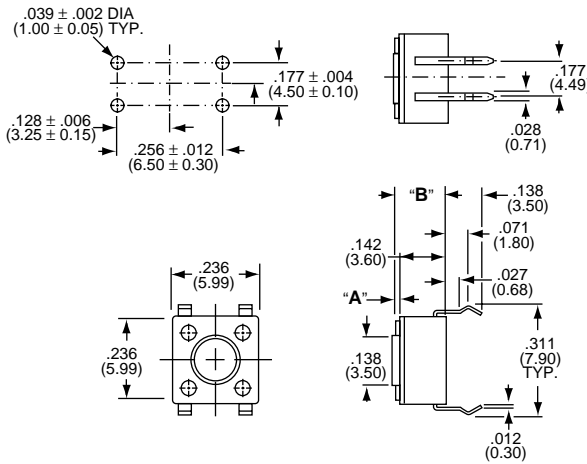

Part Number W/O ESD Terminal	Dim. A	Dim B	Button Color
FSM 2J	.028" (0,70)	.169" (4,30)	Black
FSM 4J	.055" (1,40)	.196" (5,00)	Black
FSM 6J	.134" (3,40)	.276" (7,00)	Blue
FSM 8J	.232" (5,90)	.374" (9,50)	Black
FSM 10J	.146" (3,70)	.287" (7,30)	Ivory
FSM 12J	.173" (4,40)	.315" (8,00)	White
FSM 14J	.370" (9,40)	.512" (13,00)	Black
FSM 16J	.527" (13,40)	.669" (17,00)	Black
FSM 18J	.193" (4,90)	.335" (8,51)	Black

PART NUMBERING SEQUENCE

