

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC



CATALOG LISTING

V3-245

CK-C4500

CATALOG LISTING
V3-245
PAGE 1 OF 1
RELEASE NO.
REPLACES
ISSUE
12

REVISIONS	
A	OBS C082209 CSL 18 OCT 96
B	RE-INST PR22527 DCS 7 JAN 97

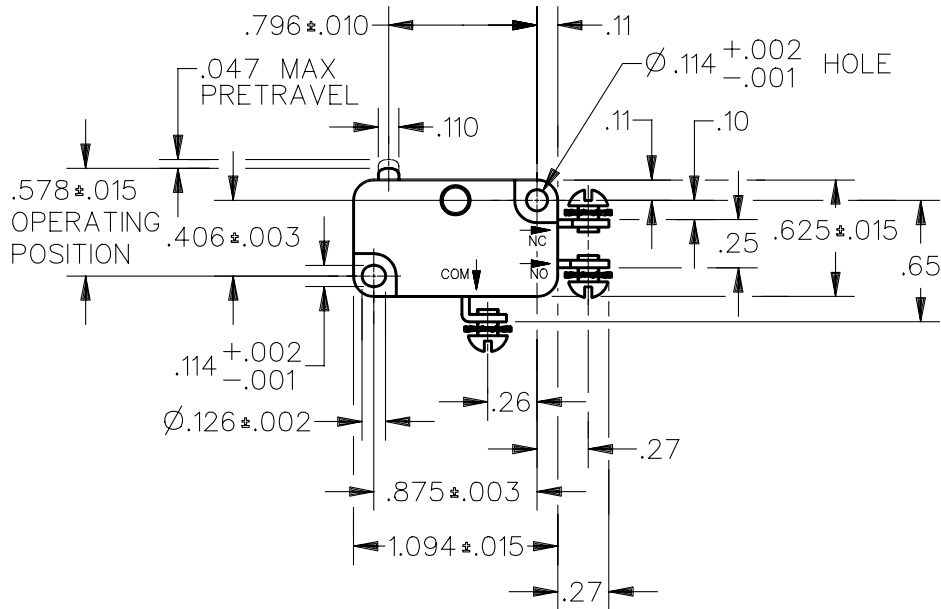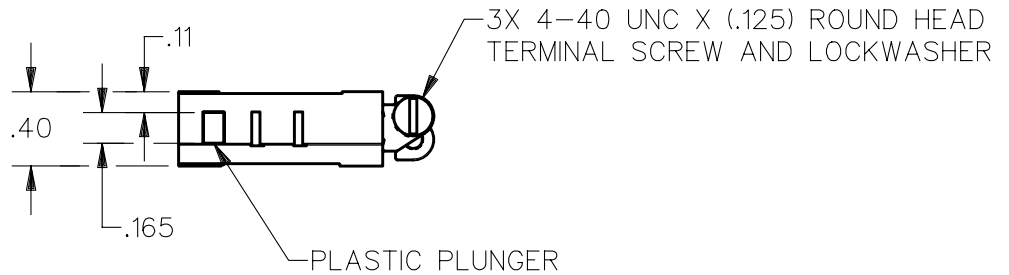

NOTE
1 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 400°F FOR 100 HOURS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
		<p>CONTACT ARRANGEMENT S P D T</p> <p>L118</p> <p>10A 1/8 HP 125 OR 250 VAC</p> <p>Ⓟ Ⓡ Ⓢ</p>	
<p>OPERATING FORCE — — — — 10-25 OZ</p> <p>RELEASE FORCE — — — — 6 OZ MIN</p> <p>DIFFERENTIAL TRAVEL — — — .006-.016</p> <p>OVERTRAVEL — — — — .040 MIN</p> <p>FREE POSITION — — — — .625 MAX</p> <p>RELEASE TRAVEL — — — — .007 MIN</p>		<p>WEIGHT .017 LB</p>	

DDM/CAD
DRAWN
DCS
7 JAN 97
CHECK