


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/24/14	C	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
05/17/19	D	UL FILE NO. FOR MATERIAL CHANGED TO E130115	T.B.	B.S.	

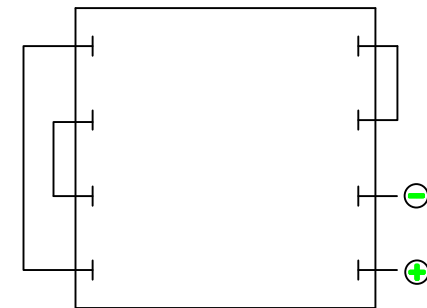


INTER CONNECTION SCHEMATIC

**1. MATERIAL:**

HOUSING : HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E130155  
 RIVETS: BRASS, NICKEL PLATED.  
 SPRING: 302 STAINLESS STEEL, NICKEL PLATED.  
 TEMPERATURE RANGE: -40°C TO +140°C  
 WIRES: 24AWG, 80°C, VW-1, TR-64, 300V, UL1007 E41396  
 RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS  
 ROHS COMPLIANT

**MOUNTING INSTRUCTION:**

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Inches)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ±.8 (.030)	Title 4AA BATTERY HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 05/17/19	Drawing Number BH4AA-W	