| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|---|---|---|---|---|
| 1 | 50-00026 | Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts | 1 | |
| 2 | 30-00007 | Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A | 1 | |
| 3 | 24-00003 | Overmold, PVC | 1 | black |

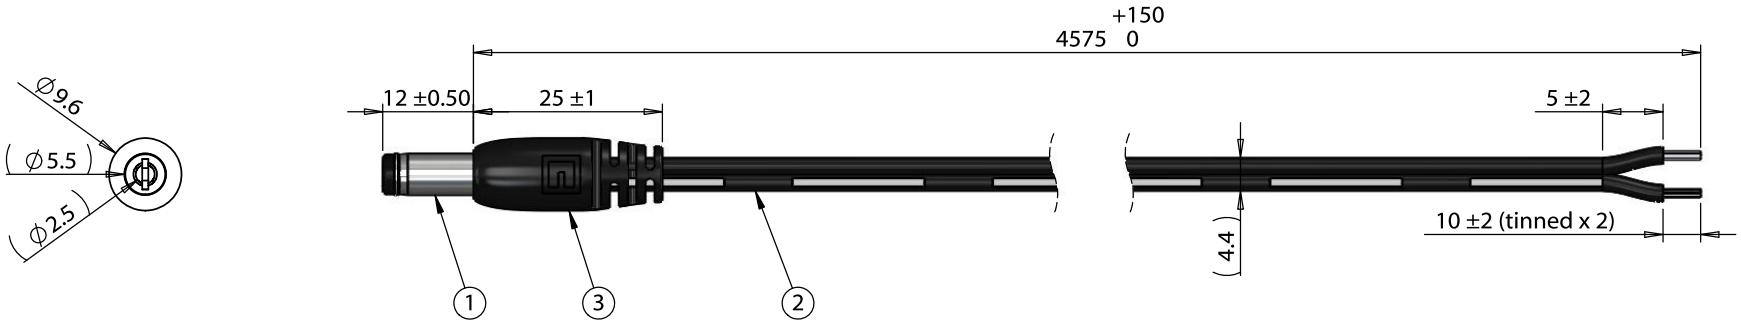


| Wiring Diagram | |
|---|---|
| 50-00026 | wire color |
| center | black with stripe |
| sleeve | black |

**Notes:**
Functionally equivalent components may be substituted

| Revision: | Date: | Description: |
|---|---|---|
| A | 11/22/2016 | Initial release |
| | | |
| | | |
| | | |
| | | |

Prepared: AW Digitally signed by AW Date: 2018.06.12 10:57:02 -07'00'

Verified: AG Digitally signed by AG Date: 2018.06.12 16:22:13 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 4575 mm, 5.5x2.5x12 mm 50-00026 dc plug to stripped tinned, 18 AWG, 30-00007 wire


TENSILITY

*tel* 1.541.323.3228 *800* 877.670.7118
*fax* 1.541.323.4202 *web* tensility.com


Size: A

Part number: 10-02395

Scale: 1:1

Sheet 1 of 1


To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com


5 4 3 2 1