

- For Use with Discrete LEDs, Models 200 & PC3 - Mounting Diameter .250" (6.35) - RC200, KN40, LW40, HN40 Mounting Hardware Included

| | | |
|----------|--------------|-----------------|
| 1 | Model | Wires |
| | PS200 | W (optional) |

| | |
|----------|---------------------|
| 2 | Bezel Finish |
| | -B Black |
| | -S Silver |

| | |
|----------|-------------------------------|
| 3 | Voltage ^[1] |
| | -5H |
| | -12H |
| | -15H |
| | -24H |
| | -28H |
| | -48H |

| Voltage/Current | |
|-----------------------------|--------------------------|
| Design Vf/If ^[2] | Max Vf/If ^[2] |
| V/C Table I | |
| 5V/27mA | 5.5V/40mA |
| 12V/27mA | 14V/35mA |
| 15V/24mA | 16.5V/28mA |
| 24V/17mA | 26V/20mA |
| 28V/16.5mA | 30V/18mA |
| 48V/15mA | 50V/16mA |


TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each numbered category in the tables below.


| | | | | | | |
|----------|--------------|--------------|----------|---------------------|----------|----------------|
| 1 | Model | Wires | 2 | Bezel Finish | 3 | Voltage |
| | PS200 | W | | -B | | -12H |

→ Part Number **PS200W-B-12H**

PS200 With Resistor PC3 LED not Included

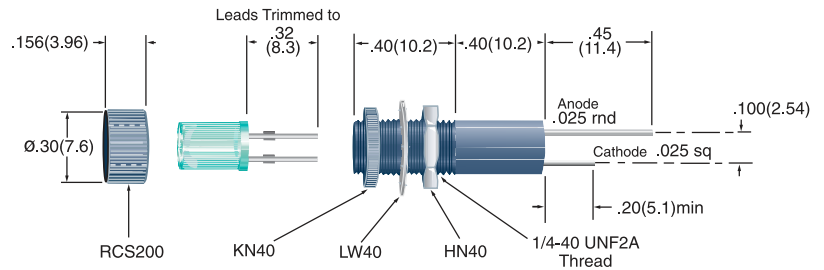

PS200 Without Resistor Discrete LED not Included

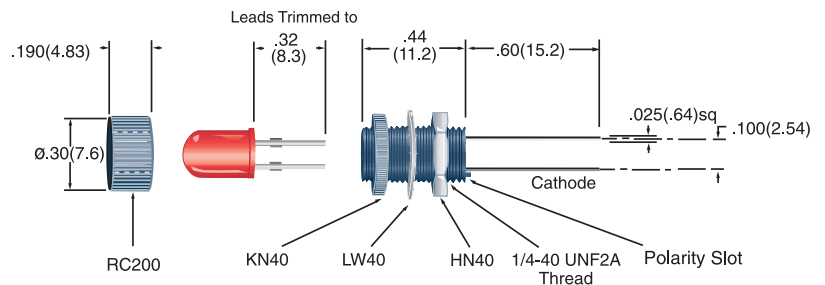

[1] Ta=25°C. Voltages 5H through 48H are VDC. For AC operation, insert D after Voltage (e.g. 24HD).

D indicates built-in rectifier; not required for 15VAC or less. For a socket without a built-in resistor, omit Voltage (e.g. PS200-B).

[2] Design current will vary depending on LED used.

Standard Wire Leads:

6.0" total length(nominal)/.50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

All dimensions are in inches (mm)

Tolerances: .xx"(x) ±.025"(.63) / .xxx"(xx)±.010"(.25)
Specifications are subject to change without notice.