
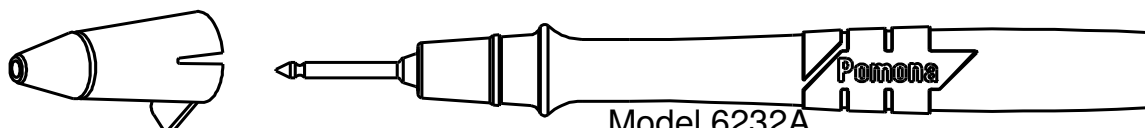


Model 6286
Standard Tip Probe Set with Right-Angle Test Leads

Model 6232A
Modular Test Probe
Qty 2 - 1 Red, 1 Black

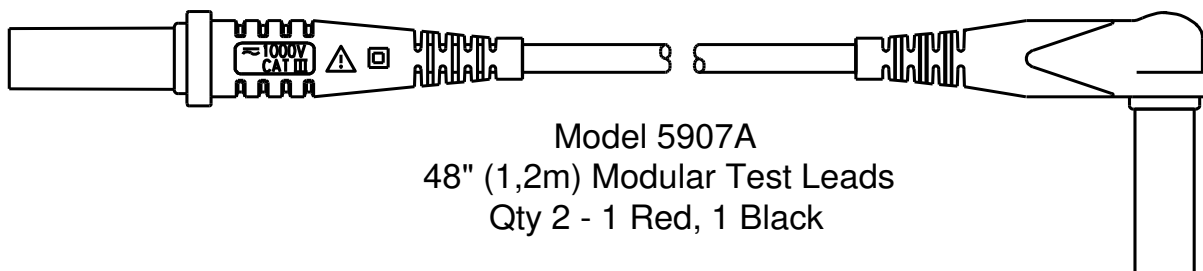

Model 5907A
48" (1,2m) Modular Test Leads
Qty 2 - 1 Red, 1 Black

For data sheets / specifications of the kit individual components, visit the Pomona web site at:
www.pomonaelectronics.com

FEATURES

- Designed to meet IEC 61010-031, the latest international safety standard for test accessories.
- Probe safety jack mates to Pomona's 5907A, 5908A and 5909A Flexible Test Leads.
- Notched probe tip mates into standard 0.080" pin jacks.
- Flexible test lead sets are a perfect interface for the most popular multimeters configured with 4 mm sheathed safety jacks, including Fluke, H-P, Tektronix and Wavetek.
- Plug and housing are molded directly to the cable in an integral one piece design and the wire is double crimped for a long lasting connection.
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety.
- Multi-leaf banana spring material is Beryllium Copper, nickel plated for extended insertion cycle life and low contact resistance.
- High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.
- Test leads can mate to a broad assortment of Pomona probes, alligators, spade lugs, etc.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm),
.xxx = ± 0.005 " (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.