



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00041	Connector, 4C audio jack, 3.5x7.8xL25.8 mm, brass, nickel plated, molding style	1	
2	30-01375	Wire, 3C, BC, 28 AWG, 300V, 80C, 4.3 mm, shielded, PVC, nylon braid	1	
3	24-00199	Overmold, 4C audio jack, Ø11xL45	1	PVC, black
4	Heat shrink	Heat shrink, black	1	covers end of jacket
5	Heat shrink	Heat shrink, black	1	covers shield

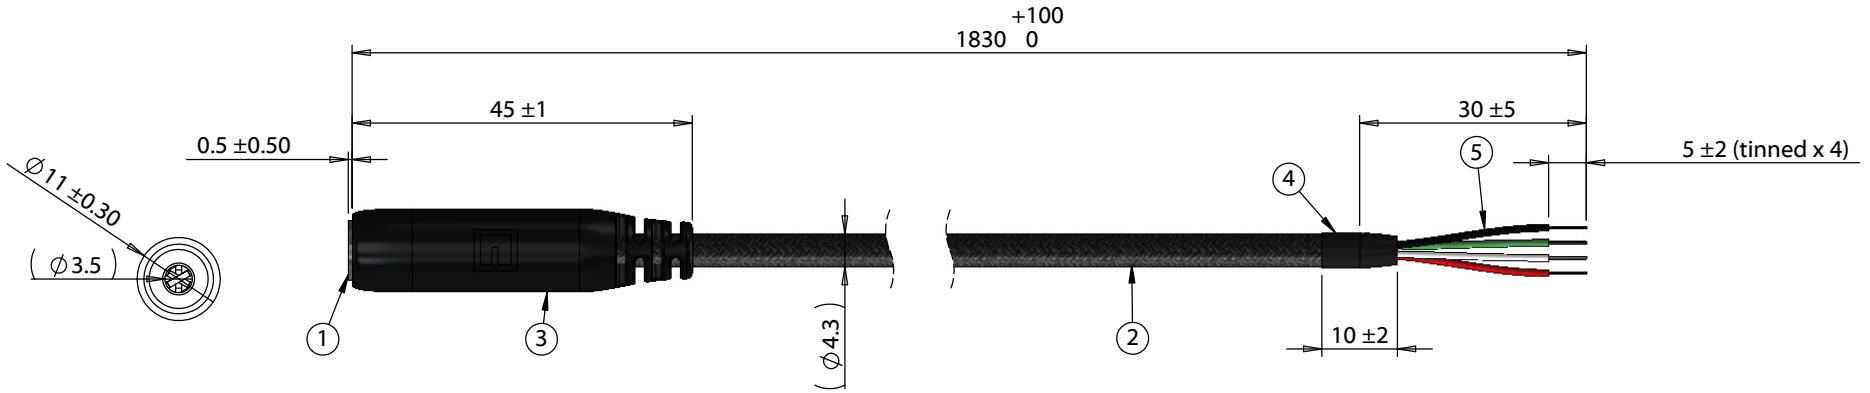

Notes:
Functionally equivalent components may be substituted



Wiring Diagram	
50-00039	wire color
A	red
B	white
C	green
D	shield

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	8/10/2020	Initial release	JC <small>Digitally signed by JC Date: 2020.08.10 12:13:14 -07'00'</small>	RoHS compliant	
			Verified: AW <small>Digitally signed by AW Date: 2020.08.10 13:28:24 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5 mm 4C 50-00041 audio jack to 5 mm tinned, 28 AWG, 30-01375 wire, nylon braided	
				Size: A	Part number: 10-03725
				Scale: 1:1	Sheet 1 of 1

5

4

3

2

1