

# Technical Datasheet

## HI-CONTACT™ 4-PASS COLD PLATE



### HI-CONTACT™ LIQUID COLD PLATE

Boyd Hi-Contact™ tube liquid cold plates feature a high performance assembly utilizing a continuous tube press fit into an extruded aluminum plate. The patented geometry used in the Boyd Hi-Contact™ process moves the fluid closer to the device generating heat, achieving the best thermal performance from a tube cold plate.

To further increase the performance of Boyd's Hi-Contact™ liquid cold plates, a thermal epoxy is applied to the joint to provide a gap free thermal interface between the tube and the plate.

### AVAILABLE OPTIONS

- Custom Sizes Available – See Boyd Custom Hi-Contact Cold Plates for Design Guidelines
- Tube Material: Stainless Steel, Cupronickel
- Finishes: AavSHIELD, AavSHIELD<sup>3</sup>

### PART NUMBERS

416501U00000G – Unfinished, Standard 152mm Plate Length

416601U00000G – Unfinished, Standard 305mm Plate Length

### HI-CONTACT™ PRODUCT SPECIFICATIONS

Property	Details
Plate Details	Extruded Aluminum
Tube Material	Copper 9.5mm O.D. x 1.24mm wall
Standard Finish	Unfinished
Epoxy	Aluminum Filled - High Thermal Conductivity



### FEATURES & BENEFITS:

- Cost Effective
- High Performance Leak Free Joints
- Hi-Contact™ for Better Heat Transfer
- Easy to Customize

Measurement	mm	in
Width	127	5
Thickness	15.24	0.55

NOTICE: The information included in this data sheet is believed to be accurate and reliable. BOYD assumes no responsibility for end use applications and no performance warranty is expressed or implied.


# Technical Datasheet

## HI-CONTACT™ 4-PASS COLD PLATE




### MECHANICAL

Dimensions are shown in mm

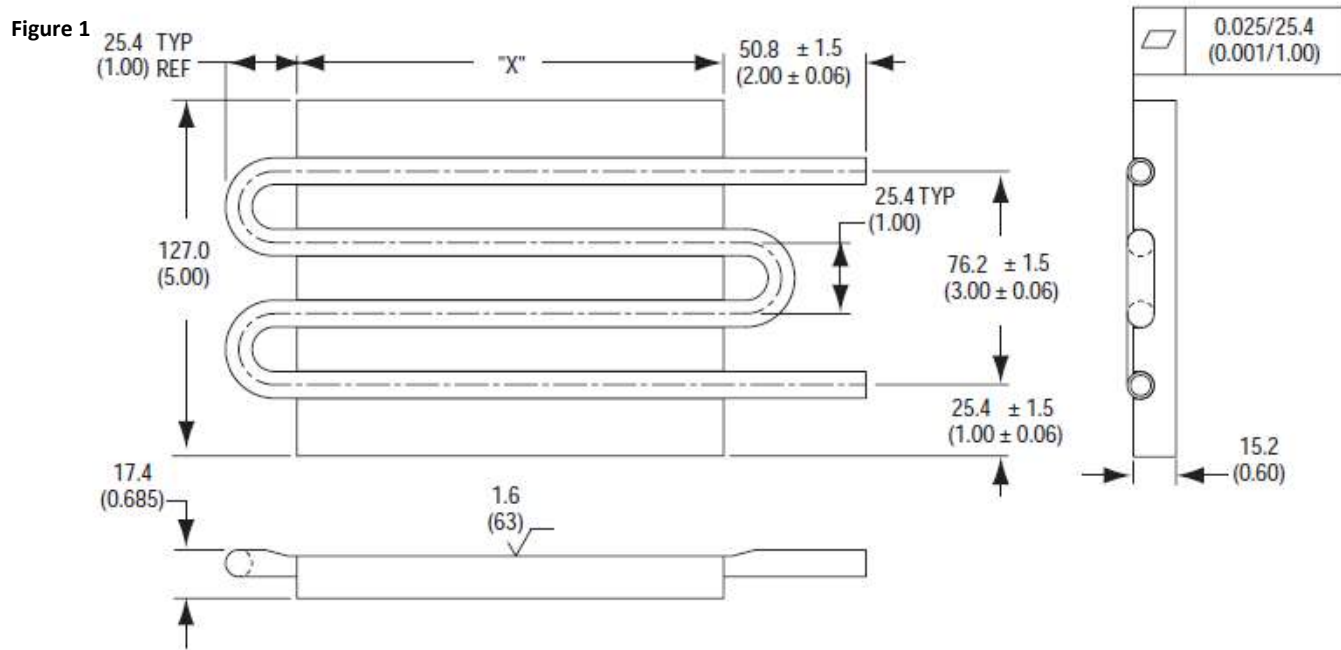

### PERFORMANCE – 4 PASS

**Figure 2**

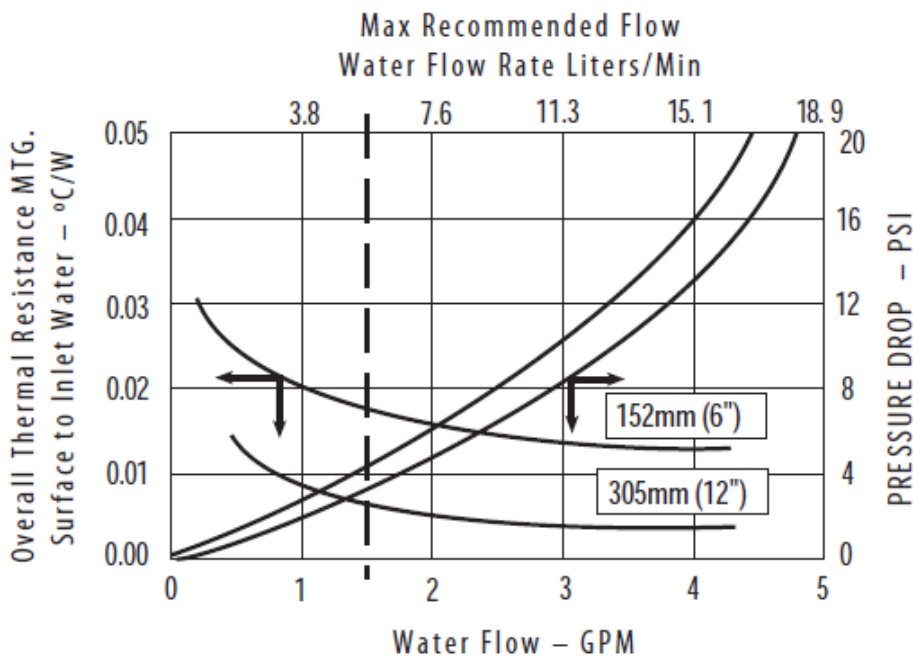

NOTICE: The information included in this data sheet is believed to be accurate and reliable. BOYD assumes no responsibility for end use applications and no performance warranty is expressed or implied.