


# Z-PACK | Z-PACK HM-Zd

TE Internal #: 1469002-1 High Speed Backplane Connectors, 80 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 8 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd

#### View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

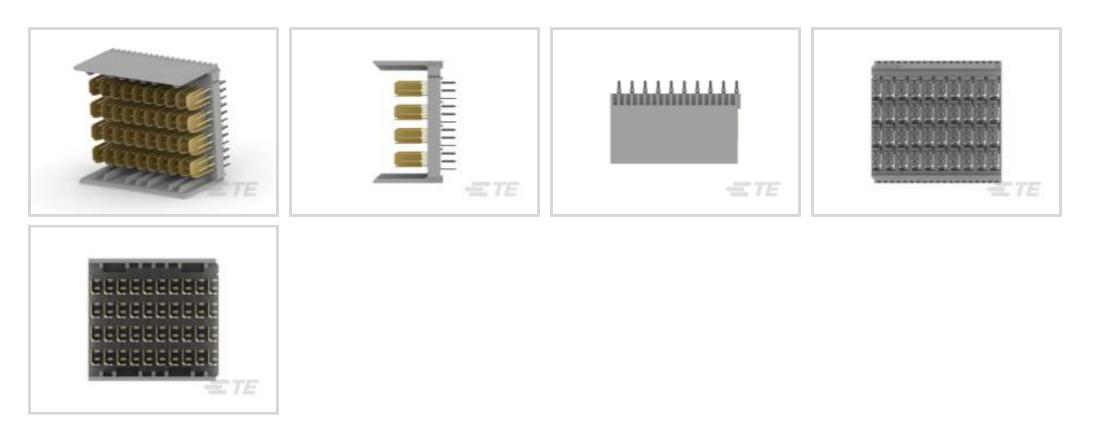

Connector System: Board-to-Board Number of Positions: 80 Row-to-Row Spacing: 1.5 mm [.059 in ]

Mating Alignment: With

Mating Alignment Type: Guide Lugs

# Features



#### Product Type Features

Connector System	Board-to-Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Partially Shrouded
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Pairs per Column	4
Number of Ground Positions	40
Card Slot Centerline	25.4 mm[1 in]
Number of Pairs	40
Number of Signal Positions	80
Number of Positions	80
Number of Rows	8
Number of Columns	10
PCB Mount Orientation	Vertical

High Speed Backplane Connectors, 80 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 8 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd



Guide Location	Unguided
Electrical Characteristics	
Operating Voltage	250 VAC
Signal Characteristics	
Data Rate	≤12 Gb/s
Body Features	
Shield Material	Phosphor Bronze
Primary Product Color	Gray
Contact Features	
Contact Mating Area Length	5.3 mm[.21 in]
Contact Layout	Matrix
Contact Type	Pin
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Mating Area Plating Material	Gold
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	.7 A

### **Termination Features**

Termination Post & Tail Length	2.5 mm[.098 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Mating Alignment	With
Mating Alignment Type	Guide Lugs
Connector Mounting Type	Board Mount
Housing Features	
Number of Shrouded Sides	2
Housing Material	Polyester - GF
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	
Connector Length	24.9 mm[.98 in]
Connector Height	13.4 mm[.527 in]
Connector Width	23.43 mm[.922 in]
Row-to-Row Spacing	1.5 mm[.059 in]

**C** For support call+1 800 522 6752

High Speed Backplane Connectors, 80 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 8 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd



#### **Usage Conditions**

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tube
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233)

#### Halogen Content

Solder Process Capability

SVHC > Threshold:

#### Pb (13% in Component Part)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900

ppm.

Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

**S** For support call+1 800 522 6752

High Speed Backplane Connectors, 80 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 8 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd



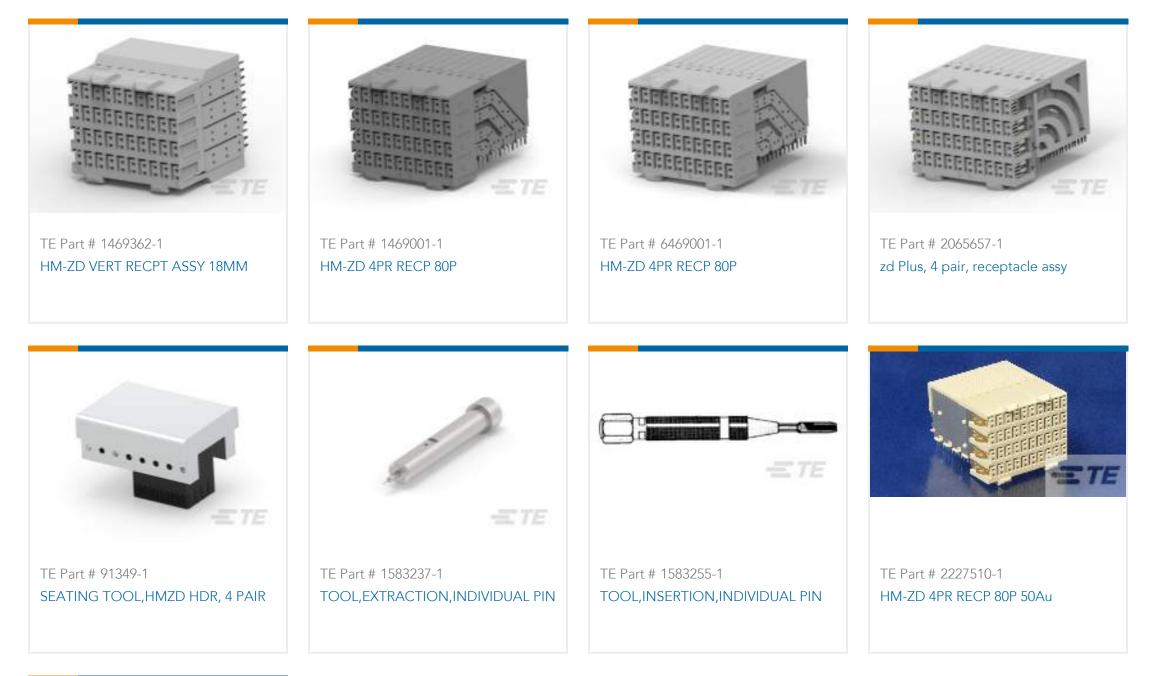




TE Part # 1583220-1 TL ASSY,HEADER REMOVAL,4 PAIR

# Also in the Series Z-PACK HM-Zd



# Customers Also Bought

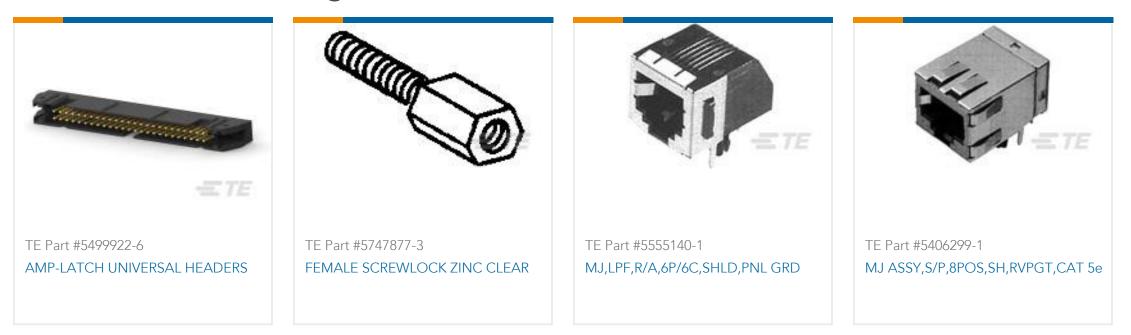

High Speed Backplane Connectors, 80 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 8 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd





# Documents

### Product Drawings HM-ZD 4PR HDR 80P 5.2MM

English

#### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_1469002-1\_D.2d\_dxf.zip

English

#### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1469002-1\_D.3d\_igs.zip

English

Customer View Model

#### ENG\_CVM\_CVM\_1469002-1\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages Stacking Connectors Quick Reference Guide (English)

English

**Product Specifications** 

Application Specification

English

# Instruction Sheets EXTRACTION TOOL FOR HM-Zd CONN.(HEADER)(TOOL P/N: 1596026-1)

English

Instruction Sheet (non U.S.)

English