

SPECIFICATION OF SURFACE MOUNT TYPE

1 .TYPE	DST1610A
2 .NOMINAL FREQUENCY	32.768 kHz
3 .OVERTONE ORDER	Fundamental
4 .LOAD CAPACITANCE(CL)	12.5 pF
5 .FREQUENCY TOLERANCE	$\pm 20 \times 10^{-6}$ (at $+25 \pm 3^{\circ}\text{C}$ )
6 .DRIVE LEVEL	0.1 $\mu\text{W}$ (0.5 $\mu\text{W}$ max.)
7 .SERIES RESISTANCE	80 k $\Omega$ max. (at CL=Series)
8 .TURNOVER TEMPERATURE	$+25 \pm 5^{\circ}\text{C}$
9 .PARABOLIC COEFFICIENT	$-0.04 \times 10^{-6} / ^{\circ}\text{C}^2$ max.
10 .OPERATING TEMPERATURE RANGE	-40 ~ +85 $^{\circ}\text{C}$
11 .STORAGE TEMPERATURE RANGE	-40 ~ +85 $^{\circ}\text{C}$
12 .SHUNT CAPACITANCE(C0)	1.3 pF typ.
13 .INSULATION RESISTANCE	500 M $\Omega$ min. (at DC $100 \pm 15\text{V}$ )
14 .DIMENSIONS	Refer to Fig-1


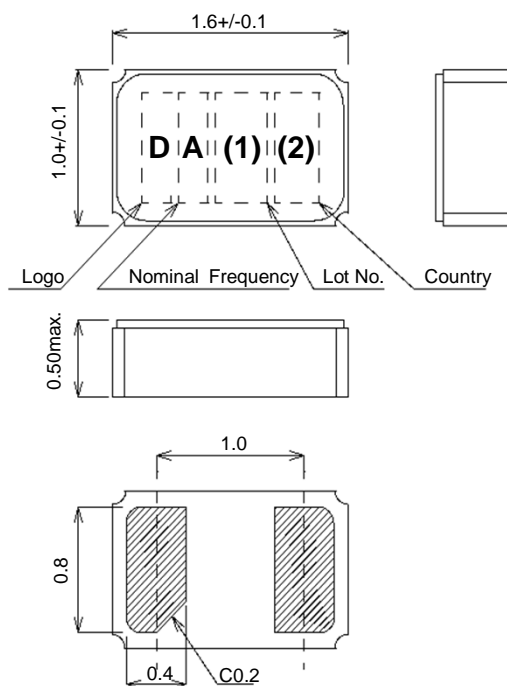


Fig.-1

<TOP VIEW>



**D** : manufacturer's code  
**A** : Nominal Frequency "A" as 32.768kHz  
**(1)** : Lot. No.  
**(2)** :Tottori Production Div.:Nothing  
: TIANJIN KDS CORP.: "C"