



Electrical specifications

Center Frequency: 2400MHz
Passband: 2352-2448MHz
Passband Variation: ≤ 2.0 dB
VSWR Over Passband: ≤ 3 dB
Rejection: ≥ 60 dB@2000MHz
Rejection 2: ≥ 60 dB@3000-6000MHz
Rejection 3: ≥ 50 dB up to 12000MHz
Impedance: 50 Ω


Mechanical

Mounting Method: Drop-in
Dimensions: 2.00" x 0.70" x 0.70"

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

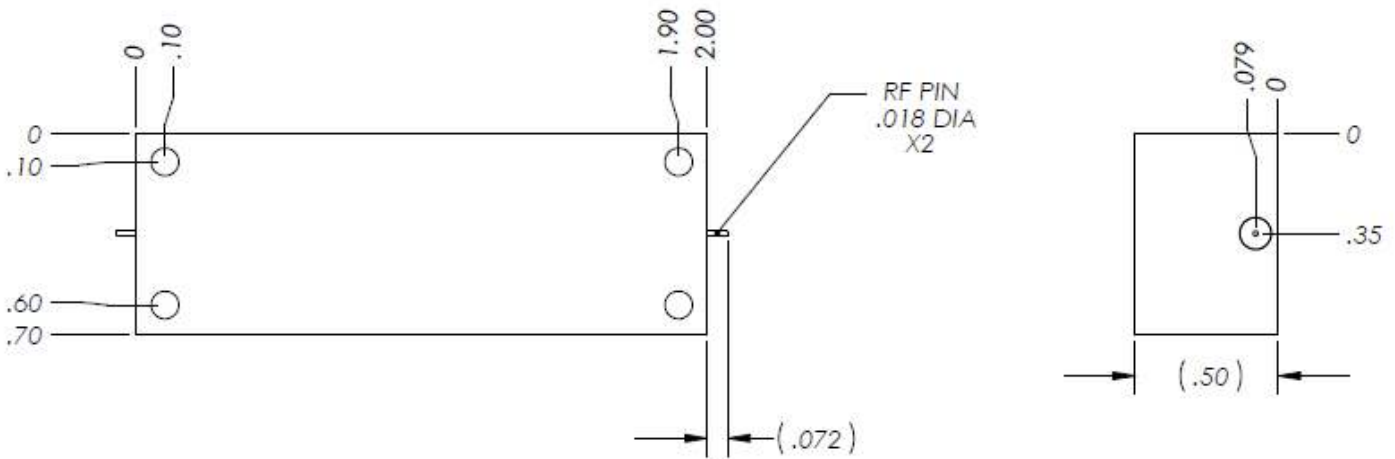



2400MHz Bandpass Filter

Part Number: AE2400B11075



Plot:

