



PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			2300	MHz
Upper Frequency:	2500			MHz
Tuning Voltage:	0.5		11.0	VDC
Supply Voltage:	7.6	8.0	8.4	VDC
Output Power:	+2.0	+6.0	+10.0	dBm
Supply Current:		29		mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic)		-10		dBc
Pushing:		0.5	1.5	MHz/V
Pulling, all Phases:		0.5	1.0	MHz pk-pk
Tuning Sensitivity:		50		MHz/V
Phase Noise @ 10kHz offset:		-103	-98	dBc/Hz
Phase Noise @ 100kHz offset:		-124	-118	dBc/Hz
Load Impedance:		50		$\Omega$
Input Capacitance:			22	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$


FRONT

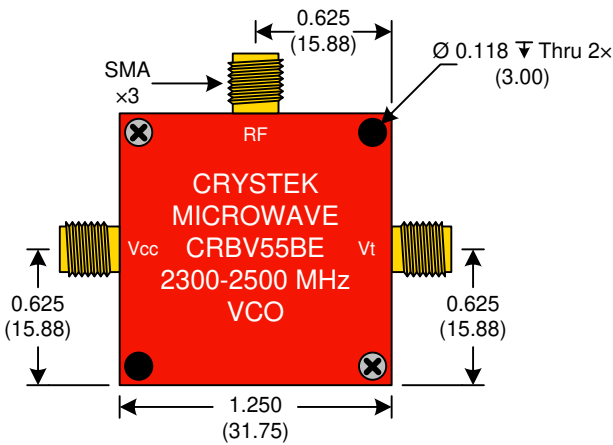

BACK

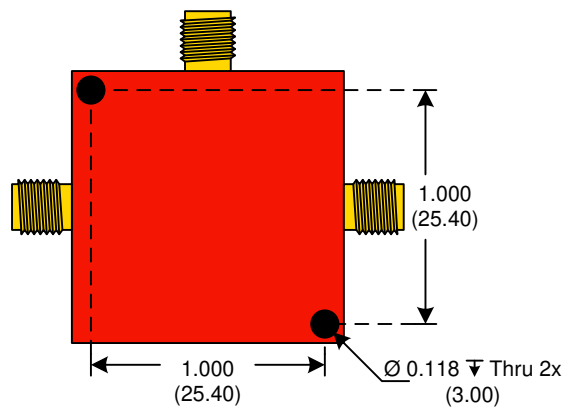

SIDE

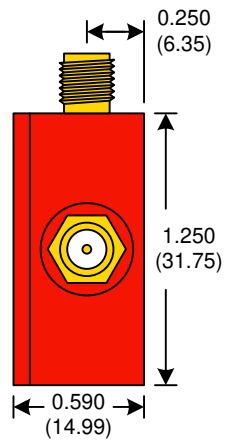


● Unless otherwise specified, Dimensions are in:  $\frac{\text{IN}}{(\text{mm})}$


**Product Control:**

Crystek Part Number:	CRBV55BE-2300-2500	Release Date:	11-Feb-2015
Revision Level:	F	Responsible:	C. Vales






Phase Noise (1 Hz BW, Typical)

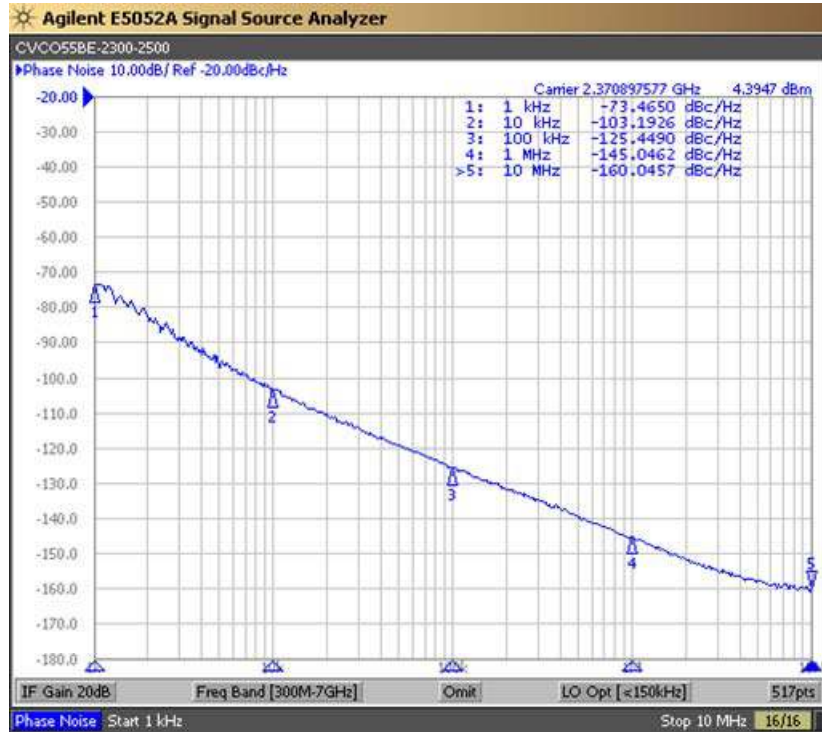

Tuning Curve (Typical)

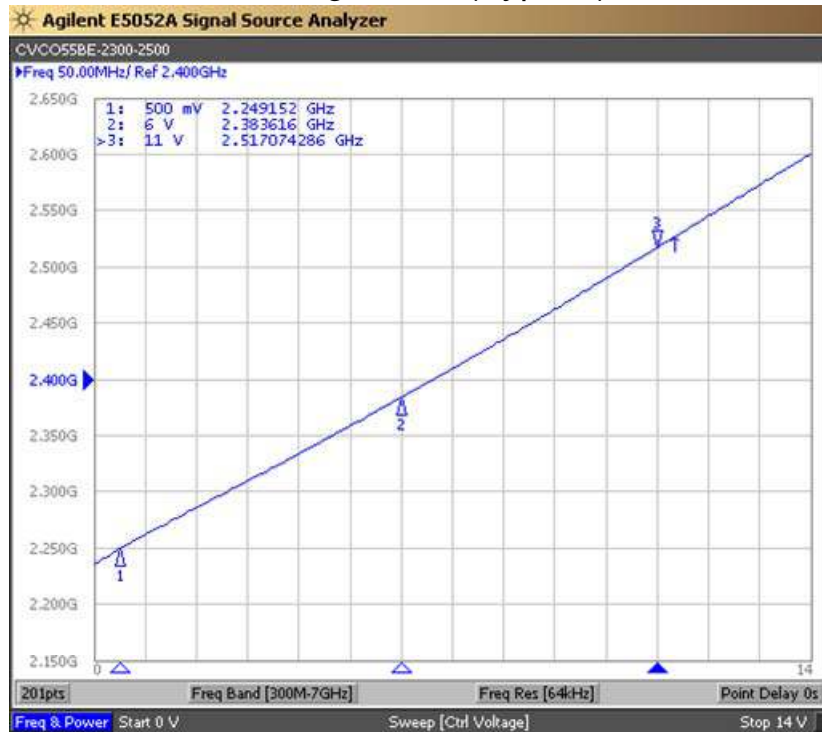

**Product Control:**

Crystek Part Number:	CRBV55BE-2300-2500	Release Date:	11-Feb-2015
Revision Level:	F	Responsible:	C. Vales

Specification is subject to change without notice

